

750-S SERIES

LOW TEMPERATURE HOT FOOD HOLDING CABINETS




- HALO HEAT...a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Holds hot food hot...meat, poultry, fish, potatoes, casseroles, vegetables, rolls, etc.
- Close temperature tolerance and even heat application maintain ideal serving temperatures throughout the cabinet.
- Stainless steel interior resists corrosion.
- Available in reach-in or pass-through design.
- Casters provide easy mobility.
- Can be stacked with an identical unit or cook/hold oven to save space.
- Antimicrobial handle retards the growth of illness-causing pathogens.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Door venting holds crispy food better.

Short Form Spec


Alto-Shaam single compartment 750-S hot food holding cabinet is constructed with a stainless steel exterior and stainless steel door with magnetic latch. The Simple control consists of an on/off power switch; up and down arrow buttons with a temperature range of 60°F to 200°F (16°C to 93°C); heat indicator light; temperature display button, and digital display. Included are two (2) chrome plated side racks with eleven (11) pan positions spaced at 1-3/8" (35mm) centers, three (3) chrome plated wire shelves, and one (1) set of 2-1/2" (64mm) heavy duty casters – 2 rigid and 2 swivel with brake.

☐ **MODEL 750-S** Hot food holding cabinet

DELUXE CONTROL OPTION



- ☐ Solid state electronic control option simplifies temperature setting and has a clear, easy-to-read LED display and includes our patented SureTemp™ heat recovery system. SureTemp™ reacts immediately to compensate for any loss of heat whenever the door is opened.
- ☐ Deluxe control is also available with six independent multiple timers for each compartment to facilitate "first-in, first-out" concept.
- ☐ Deluxe control with internal temperature probe.



ANSI/NSF 4



IP X3



FACTORY-INSTALLED OPTIONS

- Electrical Choices
 - ☐ 120V
 - ☐ 208-240V
 - ☐ 230V
- Cabinet Choices
 - ☐ Reach-In, standard
 - ☐ Pass-Through, optional

- Door Choices
 - ☐ Solid Door, standard
 - ☐ Window Door, optional

- Door Swing Choices
 - ☐ Right-hand swing, standard
 - ☐ Left-hand swing, optional

Note: Pass-through cabinets cannot have all doors hinged on the same side.

ADDITIONAL FEATURES

- Stackable design
Stackable with 750 or 767 Series single compartment ovens and holding cabinets, XL-300 Xcelerate® or CTX4-10 Combitherm®. Order appropriate stacking hardware.



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY


www.alto-shaam.com





750-S SERIES

LOW TEMPERATURE HOT FOOD HOLDING CABINETS

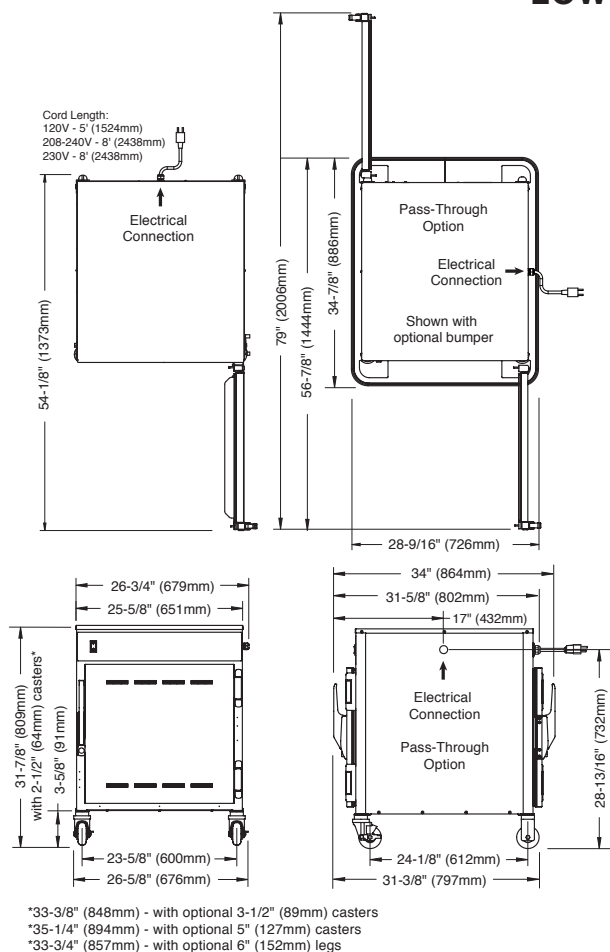

DIMENSIONS: H x W x D

EXTERIOR:

31-7/8" x 26-5/8" x 31-3/8" (809mm x 676mm x 797mm)

PASS-THROUGH:

31-7/8" x 26-3/4" x 33-13/16" (809mm x 679mm x 858mm)

INTERIOR:

20" x 21-15/16" x 26-1/2" (507mm x 556mm x 673mm)

ELECTRICAL

| VOLTAGE | PHASE | CYCLE/HZ | AMPS | kW | | CORD & PLUG |
|------------|--------|----------|------------|------------|--|---|
| 120 | 1 | 60 | 9.0 | 1.1 | | NEMA 5-15P, 15A-125V PLUG |
| 208 240 | 1 1 | 60 60 | 3.9 4.5 | .81 1.1 | | NEMA 6-15P, 15A-250V PLUG (U.S.A. ONLY) |
| 230 | 1 | 50/60 | 4.3 | 1.0 | | PLUGS RATED 250V |
| | | | | | | CH2-16P |
| | | | | | | BS 1363 |
| | | | | | | AS/NZS 3112 |

PRODUCT/PAN CAPACITY

120 lbs (54 kg) MAXIMUM

VOLUME MAXIMUM: 100 QUARTS (95 LITERS)

FULL-SIZE PANS:

GASTRONORM 1/1:

Ten (10) 20" x 12" x 2-1/2" 530mm x 325mm x 65mm

Six (6) 20" x 12" x 4" 530mm x 325mm x 100mm

Four (4) 20" x 12" x 6" 530mm x 325mm x 150mm

FULL-SIZE SHEET PANS (ON WIRE SHELVES ONLY):

Up to Six (6) 18" x 26" x 1" - WITH ADDITIONAL WIRE SHELVES

CLEARANCE REQUIREMENTS

| | |
|-----------|-----------|
| REAR | 3" (76mm) |
| TOP | 2" (51mm) |
| EACH SIDE | 1" (25mm) |

WEIGHT

NET: 157 lb (71 kg) SHIP: (EST.) 228 lb (103 kg)

CARTON DIMENSIONS: (L x W x H)

35" x 35" x 41" (889mm x 889mm x 1041mm)

INSTALLATION REQUIREMENTS

- Appliance must be installed level.
- The appliance must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.
- Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector.

OPTIONS & ACCESSORIES

| | | | |
|--|----------|--|---------|
| <input type="checkbox"/> Bumper, Full Perimeter (NOT AVAILABLE WITH 2-1/2" CASTERS) | 5010371 | <input type="checkbox"/> Legs, 6" (152mm), Flanged (SET OF FOUR) | 5011149 |
| <input type="checkbox"/> Handle, Push/Pull | 55662 | <input type="checkbox"/> Pan Grid, Wire - 18" x 26" PAN INSERT | PN-2115 |
| Carving Holder | | <input type="checkbox"/> Security Panel with Lock | 5013936 |
| <input type="checkbox"/> Prime Rib | HL-2635 | Shelves | |
| <input type="checkbox"/> Steamship (Cafeteria) Round | 4459 | <input type="checkbox"/> Chrome Wire, REACH-IN | SH-2105 |
| Casters, Stem - 2 RIGID, 2 SWIVEL W/ BRAKE | | <input type="checkbox"/> Chrome Wire, PASS-THROUGH | SH-2327 |
| <input type="checkbox"/> 5" (127mm) | 5004862 | <input type="checkbox"/> Stainless Steel, Flat Wire, REACH-IN | SH-2324 |
| <input type="checkbox"/> 3-1/2" (89mm) | 5008017 | <input type="checkbox"/> Stainless Steel, Rib Rack | SH-2743 |
| <input type="checkbox"/> Door Lock with Key | LK-22567 | Stacking Hardware | |
| <input type="checkbox"/> Drip Pan, with Drain, 1-11/16" (43mm) deep | 14831 | <input type="checkbox"/> Over or under TH, SK, S-Series | 5004864 |
| <input type="checkbox"/> Drip Pan, without Drain, 1-5/8" (41mm) deep | 1014684 | <input type="checkbox"/> Under XL-300 Xcelerate® | 5019677 |
| <input type="checkbox"/> Drip Tray - External | 5010391 | <input type="checkbox"/> Under XL-400 Xcelerate® | 5019678 |
| | | <input type="checkbox"/> Under CTX4-10 Combitherm® | 5019679 |



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



STANDARD SPECIFICATIONS:

Posts

- 1" Diameter stainless steel post
- 2" Diameter stainless steel flange
- Stainless steel glass clips
- Brushed #4 stainless steel finish

Unit

- NSF Certified
- Mounting hardware provided
- Clear tempered glass with polished edges
 - ☐ 1/4" glass (max. span 40")
 - ☐ 3/8" Glass (max. span 60")

OPTIONS AND ACCESSORIES:

Tube Size

- ☐ 1 1/2" Diameter
- ☐ 2" Diameter
- ☐ 1 1/2" Square
- ☐ 2" Square
- ☐ Other _____

Metal Finish

- ☐ Mirror Polished #8
- ☐ Powder Coat Color
RAL# _____
- ☐ Other _____

Glass Options

- ☐ Frosted
- ☐ Frosted logo
- ☐ Acrylic



Accessories

- ☐ Channel in lieu of glass clips
- ☐ Glass end panels
- ☐ Heat strips
- ☐ Heat strips with lights
- ☐ Fluorescent lights
- ☐ LED lights
- ☐ Cross supports
- ☐ Stainless steel top

Mounting Options

- ☐ Round flange
- ☐ Narrow flange
- ☐ Undercounter mount
- ☐ Heavy duty mount

ITEM: _____
QTY: _____
MODEL: AMA-101A
LENGTH: _____

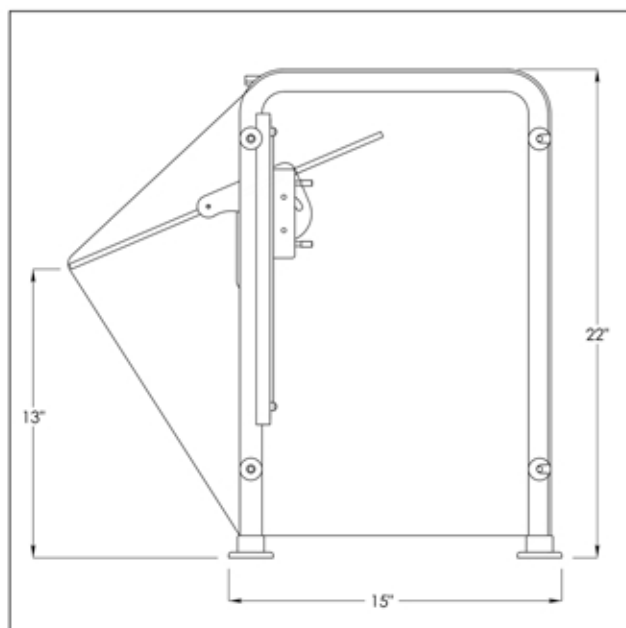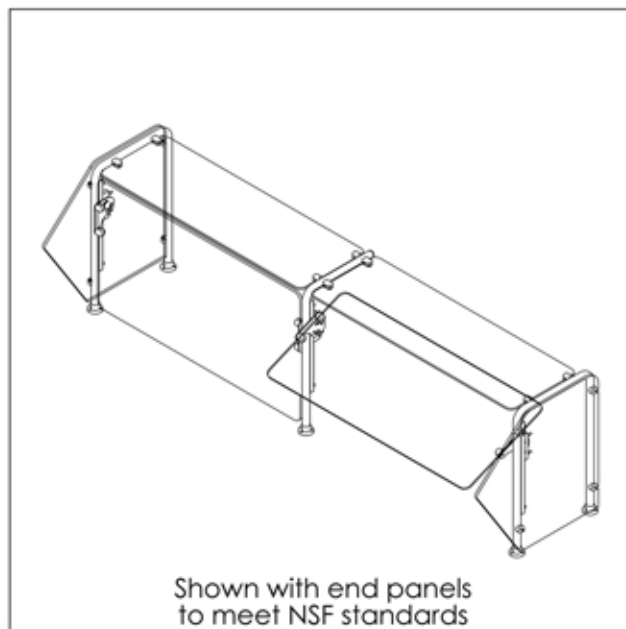

U.S. Patents: US D497,739 S
 US D472,083 S
 US D575,560 S
 Additional patents pending

STANDARD SPECIFICATIONS:

Posts

- 1" Diameter stainless steel post
- 2" Diameter stainless steel flange
- Stainless steel glass clips
- Brushed #4 stainless steel finish

Unit

- NSF Certified
- Mounting hardware provided
- Clear tempered glass with polished edges
- ☐ 1/4" glass (max. span 40") ☐ 3/8" Glass (max. span 60")

OPTIONS AND ACCESSORIES:

Tube Size

- ☐ 1 1/2" Diameter
- ☐ 2" Diameter
- ☐ 1 1/2" Square
- ☐ 2" Square
- ☐ Other _____

Metal Finish

- ☐ Mirror Polished #8
- ☐ Powder Coat Color RAL# _____
- ☐ Other _____

Glass Options



- ☐ Frosted
- ☐ Frosted logo
- ☐ Acrylic

Accessories

- ☐ Channel in lieu of glass clips
- ☐ Glass end panels
- ☐ Heat strips
- ☐ Heat strips with lights
- ☐ Fluorescent lights
- ☐ LED lights
- ☐ Cross supports

Mounting Options

- ☐ Round flange
- ☐ Narrow flange
- ☐ Undercounter mount
- ☐ Heavy duty mount

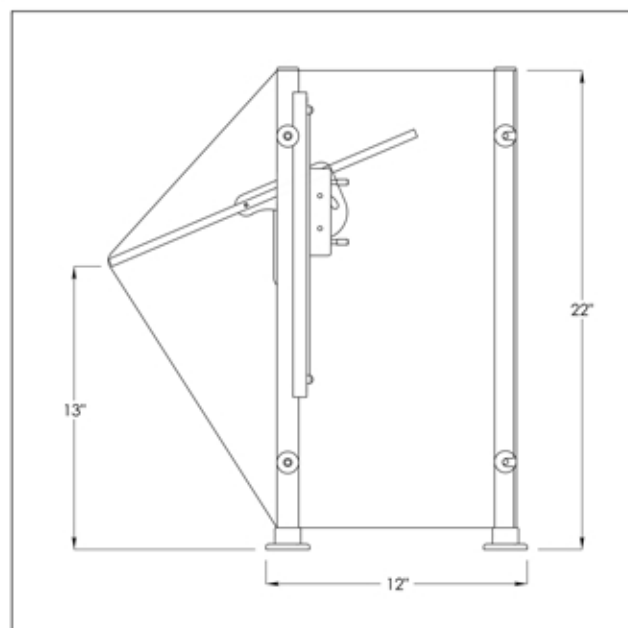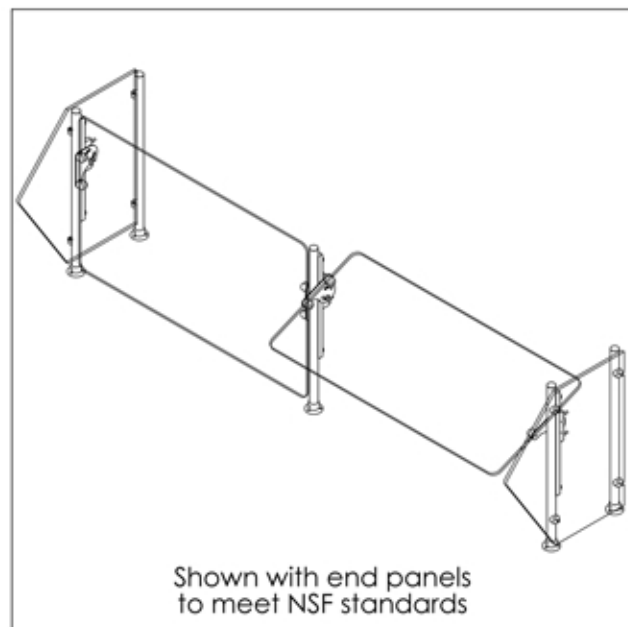

U.S. Patents: US D497,739 S
US D472,083 S
US D575,560 S
Additional patents pending

N8100-FAP

Drop-In Self-Contained Forced Air Refrigerated Cold Pans

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- **N8131-FAP 31" forced-air refrigerated cold pans**
- N8144-FAP 44" forced-air refrigerated cold pans
- N8157-FAP 57" forced-air refrigerated cold pans
- N8169-FAP 69" forced-air refrigerated cold pans
- N8182-FAP 82" forced-air refrigerated cold pans



N8157-FAP

Standard Features

- NSF-7 certified
- Black air deflectors to guide airtight over flush mount pans
- On/Off power switch, defrost timer and low pressure controls
- Environmentally friendly R290 GreenGenius refrigeration system
- Push-in flange gasket standard
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low

Options & Accessories

- Custom sizes and styles
- Single or double service flip-up sneezeguards
- Relocated compressor

Specifications

Top: is one-piece 20-gauge stainless steel. Interior liner is 22-gauge stainless steel and is creased to 1" I.P.S. (2.5cm) diameter drain. 4 pan (57" [145cm]) models and larger have two drains. A stainless steel bracket, flush with the top, to accommodate 12" x 20" (30cm x 51cm) pans 4" (10cm) or 6" (15cm) deep supplied by others. Product temperatures of 33°F (1°C) to 41°F (5°C) are maintained at 86°F (30°C) ambient room temperature, meeting NSF 7 requirements. Adapter bars are standard.

Sides and bottom: are insulated with high-density closed-cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Exterior housing is 24-gauge galvanized steel.

Refrigeration: system uses R290 refrigerant. Condensing unit is suspended below the cold pan on a 16-gauge steel frame. Temperature controlled by a ERC control with separate On/Off power switch. Unit


is supplied with expansion valve. Evaporator coil cools pans by air flowing over and under pans.

A stainless steel louver is provided for field installation; cutout dimension is 17.25" x 23.50" (43.8cm x 59.7cm). A second opening at the rear of the cabinet should be provided at installation to allow for proper air circulation.

Air Curtain assembly is removable without the use of tools.

Electrical system is 115/60c/1ph with NEMA 5-15 plug on all models.







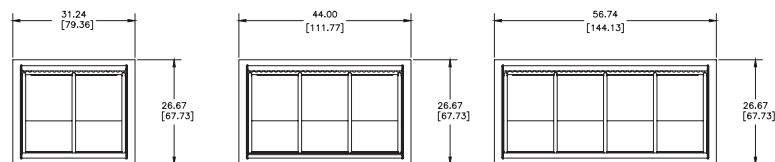


N8131-FAP

N8144-FAP




N8157-FAP



N8169-FAP

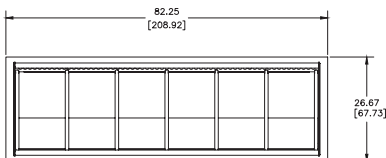

N8182-FAP



TYP. END VIEW

| Specifications | | | | | | | | | |
|----------------|-----------------------------------|----------------------|----------|------|------|-----------|----------------|-----------------|--------------|
| Model | Counter Cutout Dimensions | 12"x20" Pan Capacity | V/Hz/Ph | Amps | H.P. | Nema Plug | BTU Load (86°) | System Capacity | Ship Weight |
| N8131-FAP | 30.50" x 25.50" (78cm x 64cm) | 2 | 115/60/1 | 4.8 | 1/4 | 5-15P | 958 | 2426 | 225lbs/100kg |
| N8144-FAP | 43" x 25.50" (112cm x 64cm) | 3 | 115/60/1 | 4.8 | 1/4 | 5-15P | 1093 | 2426 | 267lbs/121kg |
| N8157-FAP | 57.75" x 25.50" (147cm x 64cm) | 4 | 115/60/1 | 8.9 | 1/2 | 5-15P | 2207 | 4889 | 310lbs/141kg |
| N8169-FAP | 68.5" x 25.50" (182cm x 64cm) | 5 | 115/60/1 | 8.9 | 1/2 | 5-15P | 2320 | 4889 | 365lbs/166kg |
| N8182-FAP | 81.50" x 25.50" (216cm x 64cm) | 6 | 115/60/1 | 8.9 | 1/2 | 5-15P | 2412 | 4889 | 406lbs/184kg |

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Non-Refrigerated Self-Service Countertop Case

□ CSC3223

Lengths include end panels
30-7/8"L x 22-5/8"D x 36-3/8"H



MODEL SHOWN: CSC3223

STANDARD FEATURES

- 6' Straight blade power cord
- Black interior
- Black trim
- Glass end
- Glass swinging front doors
- Holds (4) 18" x 26" trays
- LED 3500K side lights
- Light switch in base
- NOTE: Trays not supplied with unit.
- One year parts & labor warranty
- Tray support non-lighted shelves, (trays not included)



| Features | Standard | Options |
|----------------------------|------------------------------|--|
| BASE | □ 6"H base w/bag area - Gray | □ 2"H solid base w/o bag area - Black □ 2"H solid base w/o bag area - Gray □ 6"H base w/bag area - Black |
| FRONT DOOR GRAPHICS | □ None | □ Front door graphics (customer supplied) |
| HEADER GRAPHICS | □ None | □ Header sign graphics (customer supplied) □ Header sign, plain |
| REAR | □ Solid back panel | □ Clear glass rear swinging doors w/o lock □ Mirror back panel |
| MISCELLANEOUS | | □ Second year parts & labor warranty |

Option Notes: 1 - Increases depth of case to 23-5/8"D

Product Specifications

PLAN VIEW

SIDE VIEW

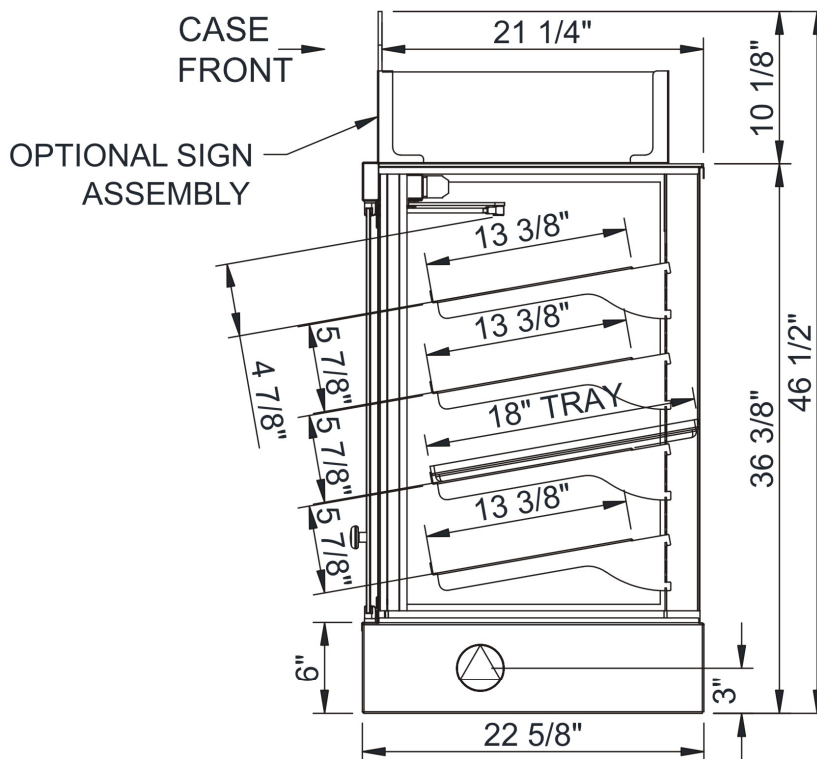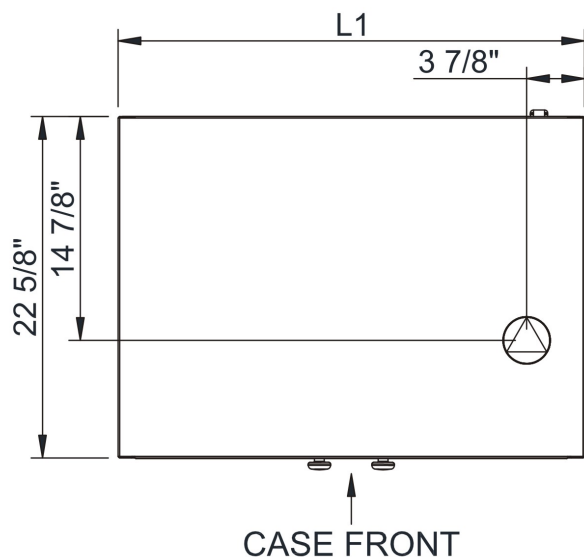

| | | | |
|---|---|---|---|
|  | ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). |  | REMOTE FLOOR SINK & UTILITIES ACCESS AREA. |
|  | LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE). |  | SELF-CONTAINED CASE SERVICE ACCESS AREA. |
|  | REFRIGERATION LINE CONNECTION. |  | DRY CASE SERVICE ACCESS AREA. |

| Model Technical Specifications | | | | | | | | | | | | | | | | | |
|--------------------------------|-----|-------|-----|----------------------|------------|---------|-----|------|----------|-------|-------|-----------|-------|-----------------|-----------------|--------|-----|
| Model | L" | L1" | L2" | System Circuit Volts | | | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug | SST | Conv. Rack BTUH | Para. Rack BTUH | Est Wt | |
| CSC3223 | N/A | 30.88 | .00 | Ambient/Lights | Circuit #1 | 110-120 | 1 | 60 | 0.70 | | 7 | 2+G | 5-15P | N/A | N/A | N/A | 250 |

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

| | |
|------------|---|
| All Models | ETL Listed to UL 65 ETL Sanitation to NSF/ANSI 2 |
|------------|---|




Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
2) 24 1/8" Minimum door entry clearance required (Without shipping skid).


⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.




MODEL AC-ST-2020-14OZ
TUMBLER DISPENSER

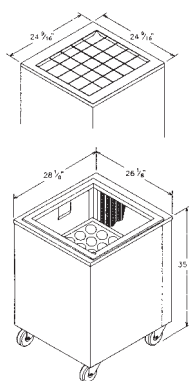

MOBILE TUMBLER
SERVE™

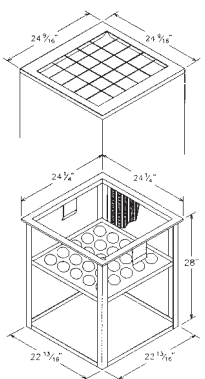

DROP-IN TUMBLER
SERVE™



CUP SIZE: 3.02" DIA.

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER

☐ AC-ST-2020-14OZ

26-1/8"W x 28-1/8"D x 35-1/2"H - Mobile Cabinet, 155 lbs,
Capacity (425) Plastic tumblers (up to 14 ounce)

☐ ADIF-2020-14OZ

24-1/4"W x 24-1/4"D x 28"H - Drop-in Counter cutout 23" x 23", 75 lbs
Capacity (425) Plastic tumblers (up to 14 ounce)

NOW THERE IS A UNIQUE WAY TO DISPENSE HUNDREDS OF TUMBLERS IN A SMALL AREA!

Piper's Tumbler Serve™ is well suited for many types of food operations – and ideal for buffet service. Piper's food focused approach to equipment design can quadruple your tumbler storage space while minimizing the footprint – another dispensing solution from Piper Servolift!

TUMBLER SERVE™ FEATURES

- ◆ Available as drop-in or mobile cabinet style dispenser
- ◆ Capacity – (425) plastic tumblers (up to 14 ounce)
- ◆ Body constructed of all-welded heavy gauge stainless steel
- ◆ Eliminates the need for 20" x 20" glass racks
- ◆ Includes high density polyethylene cup stacking base board
- ◆ 16 ga. stainless steel top grid with 1/8" welded stainless steel rods
- ◆ Mobile cabinet model mounted on four 4" diameter heavy-duty, swivel casters

OPTIONAL EQUIPMENT

- ☐ (WB) Two (2) Locking Casters
- ☐ (PB) Perimeter Bumper
- ☐ (Y4) 4" Polyurethane Casters
- ☐ (Y5) 5" Polyurethane Casters
- ☐ (V) Vertical Bumper

WARRANTY

One year parts and labor. Warranty is detailed on inside front cover of the price list.

LIMITED WARRANTY: PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.

SPEC E-6

PIPER PRODUCTS
BUILT TO LAST
www.piperonline.net

300 S. 84th Avenue
Wausau, WI 54401
Phone: 800-544-3057
Fax: 715-842-3125



1.0 GALLON COFFEE BREWING SYSTEM

98

CBS-2140 TOUCHSCREEN SERIES

The 1.0 Gallon CBS-2141 / 2142 XTS Touchscreen Series Coffee Brewers provide flexibility in small-to-medium sized venues such as Convenience Stores, Bakery Cafés and Lobbies. Simplify your daily operations and experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



CBS-2141XTS
Single Station Brewer*



CBS-2142XTS
Dual Station Brewer*

* Shown with L4D-10 Luxus® Dispenser (sold separately)

FETCO®
TRUSTED | RELIABLE | QUALITY

Perfect taste begins with a simple touch...

User Friendly Touchscreen

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data to provide instant visual feedback at any point during programming, diagnostics or the brew cycle.



Streamlined Programming, Diagnostics and Metrics

The Extractor® Touchscreen Operating System (ETOS) was engineered for quick and efficient navigation through set-up, programming, diagnostics and daily operational brewing modes.



Customizable Screens

Customize the start screen to tie your equipment and product offerings into a consistent brand message. You can also create and display individual recipe names for quick and easy access to your most used coffee blends.



XTS™ Series

Driven by a user friendly touchscreen interface and intuitive software, the XTS series represents the next step in the evolution of FETCO's renown EXTRACTOR brewing technology.




Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup – a leading reason for service calls.



Legendary Extractor® Control

Although designed specifically for smaller batch airport dispensing, these high quality brewers possess the legendary features and reliable performance you've come to expect from Extractor® branded products.

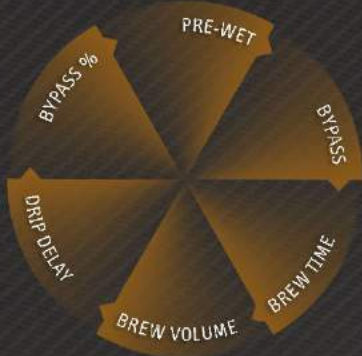

Efficient Design & Construction

FETCO equipment is designed and built to standards well above most others on the market today and can deliver significant energy savings when compared to similar competitor's products.



Modern Convenience

Duplicate profiles and parameters to and from any of the batch buttons on a single machine or copy the information to an unlimited number of brewers via a removable SD card (sold separately).



Contemporary Style

Sleek European cabinet design is attractive and fits well in most front-of-house decor typically found in coffee shops, lounges and cafes.



Water Specification

Water Connection Inlet
3/8" Male Flare Fitting

Minimum Flow Rate
1½ gpm [5.7 lpm]

Water Pressure
20-75 psig [138-517 kPa]

Electrical Configuration

| Configuration Code UNIVERSAL VOLTAGE OPTIONS | Heater Configuration | Voltage | Phase | Wires | KW | Electrical Connection | Max Amp Draw | Gallon [Liter] / Hour |
|---|----------------------|-------------|-------|-------|-----|---------------------------|--------------|----------------------------|
| E214171 | 1 x 1.5 kW | 120 | 1 | 2+G | 1.6 | NEMA 5-15P ⁽³⁾ | 13.0 | 3.9 [14.8] ⁽¹⁾ |
| Optional ⁽²⁾ | 2 x 1.5 kW | 120/208-240 | 1 | 3+G | 3.1 | L1 / L2 / N+G | 13.0 | 5.8 [22.0] ⁽¹⁾ |
| E214172 | 1 x 1.7 kW | 120 | 1 | 2+G | 1.8 | NEMA 5-15P ⁽³⁾ | 14.7 | 4.4 [16.7] ⁽¹⁾ |
| Optional ⁽²⁾ | 2 x 1.7 kW | 120/208-240 | 1 | 3+G | 3.5 | L1 / L2 / N+G | 14.7 | 8.7 [33.0] ⁽¹⁾ |
| E214173 | 1 x 2.3 kW | 120 | 1 | 2+G | 2.4 | NEMA 5-20P ⁽³⁾ | 19.7 | 5.8 [22.0] ⁽¹⁾ |
| Optional ⁽²⁾ | 2 x 2.3 kW | 120/208-240 | 1 | 3+G | 4.7 | L1 / L2 / N+G | 19.7 | 11.0 [41.6] ⁽¹⁾ |

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water; 1 gallon per batch.

(2) Sold with factory cord & plug for 120 Volt configuration. Optional user connection to a terminal block requiring L1, L2, N and ground to 120/208-240 VAC. No airpot locator for this group. User selectable for optional, dual in-series heater configuration.

(3) Sold with factory cord & plug.

Compatible Dispensers

#D448 1.0 Gallon LUXUS*
L4S-10 Thermal Dispenser



Product Dimensions
(HxWxD):
21 3/4" x 8" x 12 1/2"
[55.2 x 20.3 x 31.7 cm]
Weight (Empty / Filled)
8.0 lbs [3.6 kg] /
15.9 lbs [7.2 kg]

#D451 1.0 Gallon LUXUS*
L4S-10 Thermal Server*



Product Dimensions
(HxWxD):
13 1/2" x 8" x 11 1/2"
[34.2 x 20.3 x 29.2 cm]
Weight (Empty / Filled)
5.6 lbs [2.5 kg] /
12.4 lbs [5.6 kg]

* Must be used with S4S Serving Stations.

Serving Stations

#A147
S4S-10-1
Single Serving Station
for L4S-10 Server



#A148
S4S-10-2
Twin Serving Station
for L4S-10 Server



#A149
S4S-10-3
Triple Serving Station
for L4S-10 Server



Paper Filter

#F002
13" x 5"
Standard Paper
Coffee Filter



Brew Basket

#B003218B1
13" x 5"
Stainless Steel
Brew Basket



#B014218BN2
13" x 5"
Plastic Brew Basket
w/ Brown Insert



Cups per Hour*

8oz. 184 12oz. 123
16oz. 92 20oz. 74

* Approximate based on maximum power setting.

Colored Brew Basket Handle Inserts



Blue:
1023.00180.00



Red:
1023.00190.00






Green:
1023.00191.00



Orange:
1023.00192.00

Measurements

| | | | | | | | | |
|--|---|---|--|---|--|---|--|---|
| Height 34 ³ / ₈ " [87.3 cm] | Width 11 ³ / ₄ " [29.8 cm] | Depth 20 ³ / ₈ " [51.8 cm] | Empty Weight 29 lbs [13.2 kg] | Filled Weight 55 lbs [25.0 kg] | Combined Filled Weight 66 lbs [30.0 kg] <small>BREWER + 1 FILLED 140-30 DISPENSER</small> | Hot Water Tank Cap. 3.3 gal [12.5 l] | Shipping Weight: 50 lbs [22.7 kg] | Shipping Dimensions: 35" x 17" x 22" [89.0 x 43.2 x 55.9 cm] |
|--|---|---|--|---|--|---|--|---|

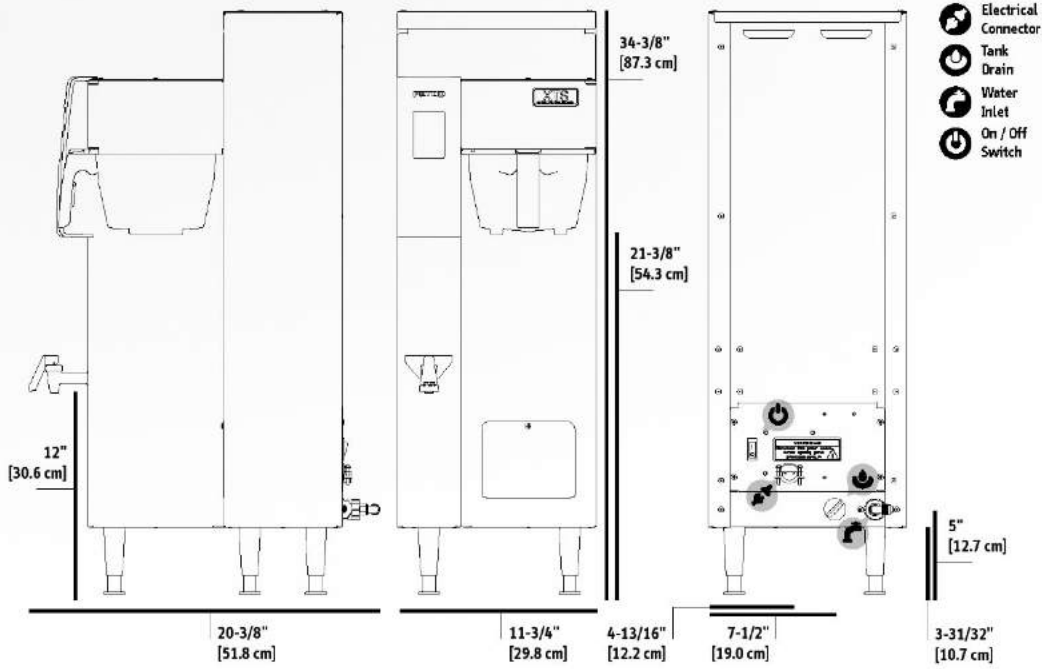


Gallery



STANDARD SPECIFICATIONS:

- 1" Diameter stainless steel post
- 2" Diameter stainless steel flange
- Stainless steel top glass clips
- Brushed #4 stainless steel finish
- Glass provided with 1" radius corners
- NSF Certified and UL Listed
- Independent angular adjustment
- Independent vertical adjustment
- Mounting hardware provided
- Clear tempered glass with polished edges
- End panel is 1/4" thick
- Glass panels are 3/8" thick

Item: _____
Quantity: _____
Model: AMA-101A
Length: _____

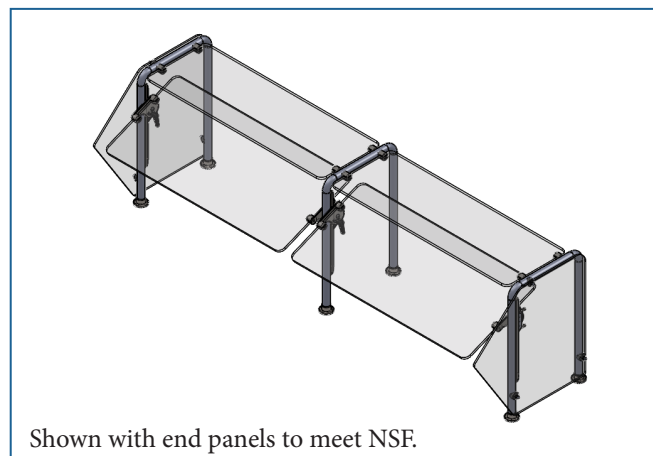

OPTIONS AND ACCESSORIES:

Tube Size

- ☐ 1-1/2" Round
- ☐ 1" Square
- ☐ 1-1/2" Square
- ☐ Other _____

Metal Finish

- ☐ Mirror Polished #8
- ☐ Powder Coat Color
RAL # _____
- ☐ Other _____

Glass Panels

- ☐ 1/4" Glass (max. span 54")
- ☐ 3/8" Glass (max. span 66") Standard
- ☐ 1/2" Glass (max. span 72")


Glass Options

- ☐ Frosted
- ☐ Frosted Logo
- ☐ Acrylic
- ☐ Pattern
- ☐ Low Iron Glass

Mounting Options

- ☐ Round Flange
- ☐ Narrow Flange
- ☐ Undercounter Mount
- ☐ Heavy Duty Mount

See mounting page for more details.

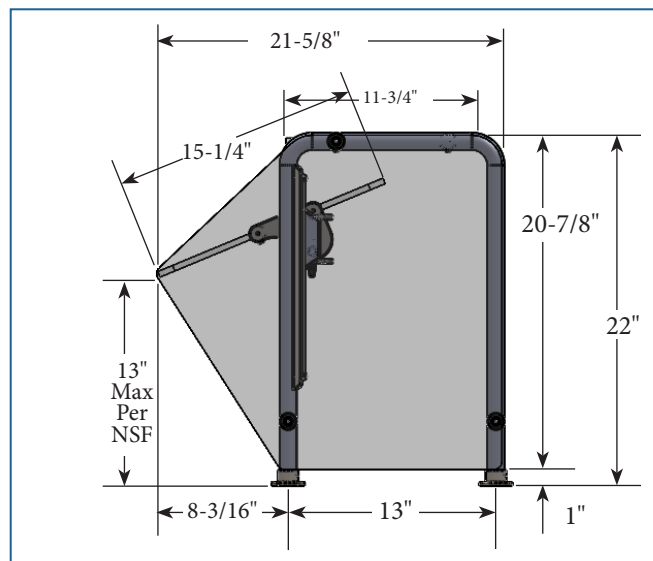

Light/Warmer Options

- ☐ LED Light
- ☐ Fluorescent Light
- ☐ Heat Unit
- ☐ Heat and Light Combo Unit

U.S. Patents: US D497.739 S
US D472.083 S
US D575.560 S
Additional patents pending.





TRUE MANUFACTURING CO., INC.
U.S.A. FOODSERVICE DIVISION

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400
Fax (636)272-2408 • Toll Free (800)325-6152 • Int'l Fax# (001)636-272-7546
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model #: _____

SIS #

Model:

GDM-06-34-HC~TSL01

Glass Door Merchandiser:

Swing Door Counter-Top Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01



GDM-06-34-HC~TSL01

- ▶ The world's #1 manufacturer of glass door merchandisers.
- ▶ True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.
- ▶ Designed for convenient access, fast service, and attractive display.
- ▶ Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- ▶ High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (5°C to 3.3°C) for the best in food preservation.
- ▶ Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- ▶ Interior - attractive, NSF approved, white aluminum liner with aluminum floor.
- ▶ Self closing door. Positive seal, torsion type closure system.
- ▶ "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- ▶ LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- ▶ Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice.
Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

| Model | Doors | Shelves | Cabinet Dimensions (inches) (mm) | | | HP | Voltage | Amps | NEMA Config. | Cord Length (total ft.) (total m) | Crated Weight (lbs.) (kg) |
|--------------------|-------|---------|--|------------|------------|-------------|----------|------------|-----------------|--|------------------------------------|
| | | | L | D† | H | | | | | | |
| GDM-06-34-HC~TSL01 | 1 | 3 | 20½ 519 | 26¾ 670 | 33½ 850 | 1/10 N/A | 115/60/1 | 1.6 N/A | 5-15P | 10 3.05 | 175 80 |

† Depth does not include 1 1/8" (42 mm) for door handle. Depth does not include 1/4" (6 mm) for system mechanical components.



APPROVALS:

AVAILABLE AT:

10/18

Printed in U.S.A.

Model:

GDM-06-34-HC~TSL01

Glass Door Merchandiser:

Swing Door Counter-Top Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01

true®

STANDARD FEATURES

DESIGN

- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.

CABINET CONSTRUCTION

- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.

- Interior - attractive, NSF approved, white aluminum liner with stainless steel floor.
- Insulation - entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Door sign decal. Variety of decal options available.

DOOR

- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Door fitted with 7" (178 mm) long extruded handle.
- Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Three (3) adjustable, heavy duty PVC coated wire shelves 17 1/8" L x 17 1/2" D (435 mm x 445 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

LIGHTING

- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and decal offerings.
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



115/60/1
NEMA-5-15R


OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

☒ Left hinge version

- ☐ White exterior
- ☐ Stainless steel exterior
- ☐ Stainless steel interior
- ☐ Additional shelving
- ☐ 2 1/2" legs
- ☐ Stainless top

PLAN VIEW

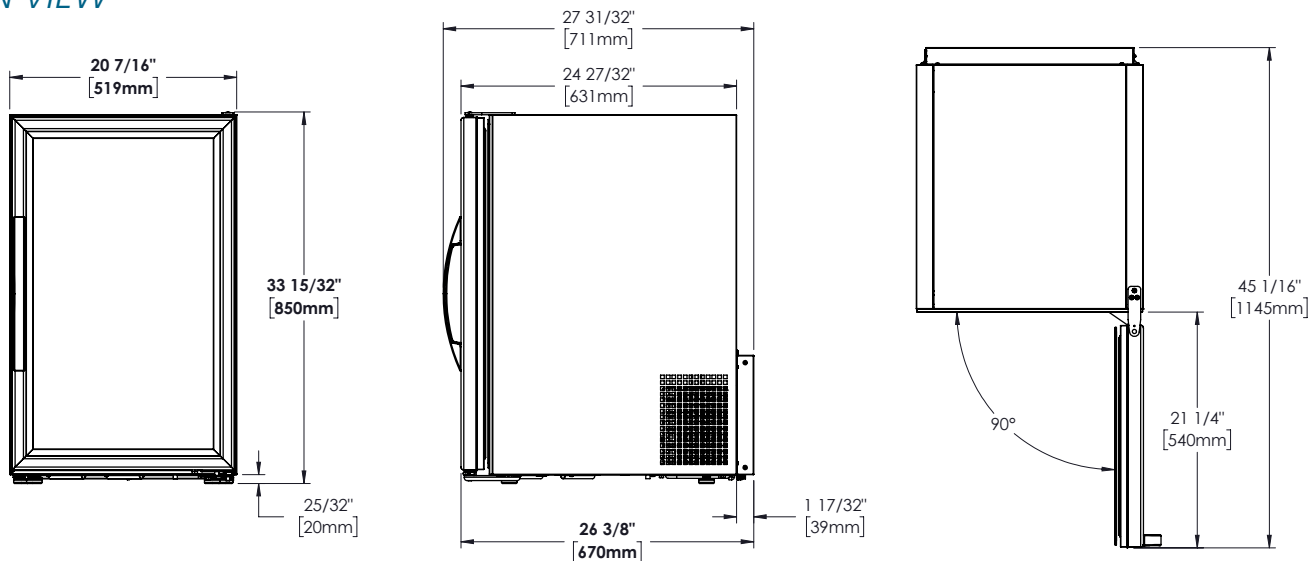

WARRANTY

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



| Model | Elevation | Right | Plan | 3D | Back |
|--------------------|-----------|-------|------|----|------|
| GDM-06-34-HC~TSL01 | | | | | |

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com



N8100-FAP

Drop-In Self-Contained Forced Air Refrigerated Cold Pans

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

N8100-FA Drop-In Self-Contained Forced Air Refrigerated Cold Pans

Models

- N8131-FAP 31" forced-air refrigerated cold pans
- N8144-FAP 44" forced-air refrigerated cold pans
- N8157-FAP 57" forced-air refrigerated cold pans
- N8169-FAP 69" forced-air refrigerated cold pans
- N8182-FAP 82" forced-air refrigerated cold pans



N8157-FAP

Standard Features

- NSF-7 certified
- Black air deflectors to guide airtight over flush mount pans
- On/Off power switch, defrost timer and low pressure controls
- Environmentally friendly R290 GreenGenius refrigeration system
- Push-in flange gasket standard
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low

Options & Accessories

- Custom sizes and styles
- Single or double service flip-up sneezeguards
- Relocated compressor

Specifications

Top: is one-piece 20-gauge stainless steel. Interior liner is 22-gauge stainless steel and is creased to 1" I.P.S. (2.5cm) diameter drain. 4 pan (57" [145cm]) models and larger have two drains. A stainless steel bracket, flush with the top, to accommodate 12" x 20" (30cm x 51cm) pans 4" (10cm) or 6" (15cm) deep supplied by others. Product temperatures of 33°F (1°C) to 41°F (5°C) are maintained at 86°F (30°C) ambient room temperature, meeting NSF 7 requirements. Adapter bars are standard.

Sides and bottom: are insulated with high-density closed-cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Exterior housing is 24-gauge galvanized steel.

Refrigeration: system uses R290 refrigerant. Condensing unit is suspended below the cold pan on a 16-gauge steel frame. Temperature controlled by a ERC control with separate On/Off power switch. Unit


is supplied with expansion valve. Evaporator coil cools pans by air flowing over and under pans.

A stainless steel louver is provided for field installation; cutout dimension is 17.25" x 23.50" (43.8cm x 59.7cm). A second opening at the rear of the cabinet should be provided at installation to allow for proper air circulation.

Air Curtain assembly is removable without the use of tools.

Electrical system is 115/60c/1ph with NEMA 5-15 plug on all models.







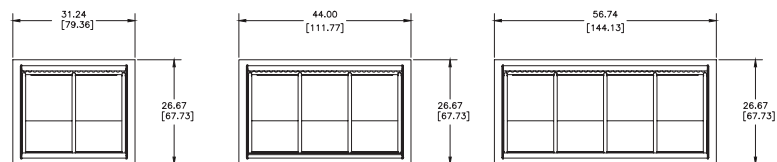


N8131-FAP

N8144-FAP




N8157-FAP



N8169-FAP

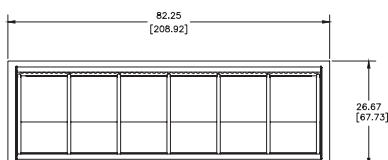

N8182-FAP



TYP. END VIEW


| Specifications | | | | | | | | | |
|------------------|--|----------------------|-----------------|------------|------------|--------------|----------------|-----------------|--------------|
| Model | Counter Cutout Dimensions | 12"x20" Pan Capacity | V/Hz/Ph | Amps | H.P. | Nema Plug | BTU Load (86°) | System Capacity | Ship Weight |
| N8131-FAP | 30.50" x 25.50" (78cm x 64cm) | 2 | 115/60/1 | 4.8 | 1/4 | 5-15P | 958 | 2426 | 225lbs/100kg |
| N8144-FAP | 43" x 25.50" (112cm x 64cm) | 3 | 115/60/1 | 4.8 | 1/4 | 5-15P | 1093 | 2426 | 267lbs/121kg |
| N8157-FAP | 57.75" x 25.50" (147cm x 64cm) | 4 | 115/60/1 | 8.9 | 1/2 | 5-15P | 2207 | 4889 | 310lbs/141kg |
| N8169-FAP | 68.5" x 25.50" (182cm x 64cm) | 5 | 115/60/1 | 8.9 | 1/2 | 5-15P | 2320 | 4889 | 365lbs/166kg |
| N8182-FAP | 81.50" x 25.50" (216cm x 64cm) | 6 | 115/60/1 | 8.9 | 1/2 | 5-15P | 2412 | 4889 | 406lbs/184kg |

Welbilt reserves the right to make changes to the design or specifications without prior notice.

STANDARD SPECIFICATIONS:

- 1" Diameter stainless steel post
- 2" Diameter stainless steel flange
- Stainless steel top glass clips
- Brushed #4 stainless steel finish
- Glass provided with 1" radius corners
- NSF Certified and UL Listed
- Independent angular adjustment
- Independent vertical adjustment
- Mounting hardware provided
- Clear tempered glass with polished edges
- End panel is 1/4" thick
- Glass panels are 3/8" thick

Item: _____
 Quantity: _____
 Model: AMA-101A
 Length: _____

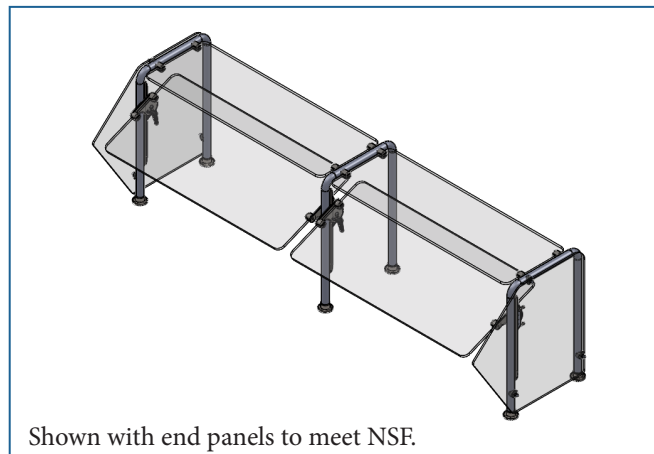

OPTIONS AND ACCESSORIES:

Tube Size

- ☐ 1-1/2" Round
- ☐ 1" Square
- ☐ 1-1/2" Square
- ☐ Other _____

Metal Finish

- ☐ Mirror Polished #8
- ☐ Powder Coat Color
RAL # _____
- ☐ Other _____

Glass Panels

- ☐ 1/4" Glass (max. span 54")
- ☐ 3/8" Glass (max. span 66") Standard
- ☐ 1/2" Glass (max. span 72")


Glass Options

- ☐ Frosted
- ☐ Frosted Logo
- ☐ Acrylic
- ☐ Pattern
- ☐ Low Iron Glass

Mounting Options

- ☐ Round Flange
- ☐ Narrow Flange
- ☐ Undercounter Mount
- ☐ Heavy Duty Mount

See mounting page for more details.

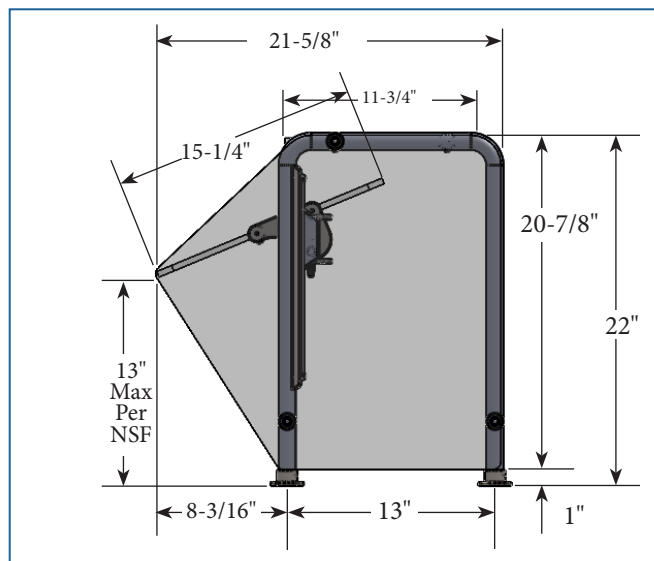

Light/Warmer Options

- ☐ LED Light
- ☐ Fluorescent Light
- ☐ Heat Unit
- ☐ Heat and Light Combo Unit

U.S. Patents: US D497.739 S
 US D472.083 S
 US D575.560 S
 Additional patents pending.



Project _____

Item No. _____

Quantity _____

INCOGNEETO™

Under-Counter Buffet Warmer



PERFORMANCE

The CookTek® Incogneeto™ is an under-counter buffet warmer designed to mount under natural stone or “engineered” stone countertops – no cutting of the stone is required. The Magneeto™ trivet (one included with purchase) is placed on the countertop and acts as a temperature sensor, communicator, and locator device which allows the efficient heating of any induction-compatible pan through the stone countertop.*



(CROSS-SECTION VIEW)

1. Chafing Dish
2. Magneeto™ 2 Trivet
3. Stone Countertop
4. Plywood Substrate
5. Incogneeto™ Unit

FEATURES

- Models available in 650 watts
- Under-the-counter design with a polycarbonate top and aluminum housing
- Magneeto™ trivet locates heat zone when placed on countertop – one included with purchase
- Accommodates up to a 12” (305 mm) induction-compatible enamel cast ironware or traditional chafer
- Can be safely used under natural stone or engineered “stone” countertops
- Automatic pan detection allows for instant energy transmission to pan; almost no energy consumption when pan is not present
- Lock feature prevents unwanted setting changes
- Standard Cat 5e or Cat 6 patch cable from unit to control box included
- Available in 100–120 VAC or 200–240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- One-year field-service warranty – U.S. and Canada

ACCESSORIES (NOT INCLUDED)

- Additional Magneeto™ Trivet (Part # INC-3000)
- Large Round Chafer, 6.9 qt, Glass Lid with 1/1 SS Insert (Part # 301311)
- Large Round Stainless Insert, 1/1 (Part # CT-103128)
- Large Round Stainless Insert Split Pan, 2/2 (Part # CT-103771)
- Large Round Porcelain Insert, 1/1 (Part # CT-103095)
- Large Round Porcelain Insert Split Pan, 2/2 (Part # CT-103096)
- Medium Round Chafer, 4.8 qt, Glass Lid with 1/1 SS Insert (Part # 301309)
- Medium Round Stainless Insert, 1/1 (Part # CT-103129)
- Medium Round Porcelain Insert 1/1 (Part # CT-103094)
- Serving Spoon Holder, Large or Medium (Part # CT-103097)



INC-3000



301311 (Large)
301309 (Medium)



CT-103128 (Large)
CT-103129 (Medium)



CT-103771
(Large)



CT-103095 (Large)
CT-103094 (Medium)



CT-103096 (Large)






CT-103097
(Large or Medium)

CERTIFICATIONS



*Induction buffet units require the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

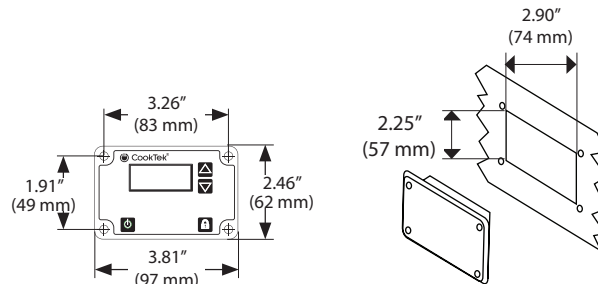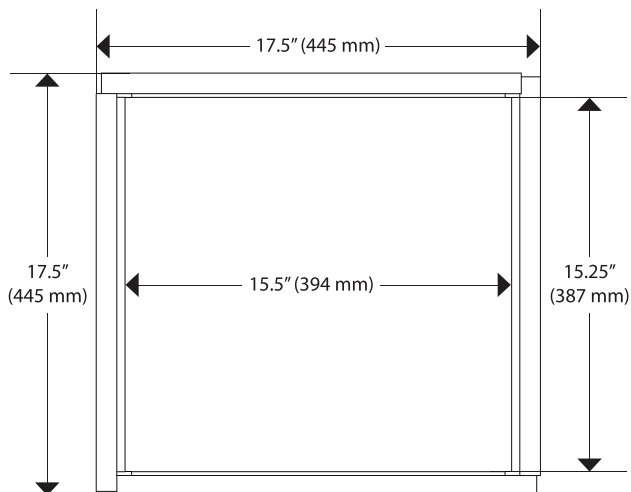

| DIMENSIONS | | |
|--|--------------------|---------|
| Unit Height | 4.5" | 114 mm |
| Unit Width | 17.5" | 445 mm |
| Unit Depth | 17.5" | 445 mm |
| Interior Surface Width | 15.5" | 394 mm |
| Interior Surface Depth | 15.25" | 387 mm |
| Weight | 15 lb. | 6.8 kg |
| Max Ambient Temperature | 122°F | 50°C |
| CLEARANCE | | |
| Front | 2" | 51 mm |
| Sides | 2" | 51 mm |
| Below* | 6" | 152 mm |
| COOLING REQUIREMENTS AND SPECIFICATIONS* | | |
| Min. Ventilation Requirements | 16 in² | 103 cm² |
| Internal Cooling Fan Displacement | 70 CFM (2.0m³/min) | |
| SHIPPING INFORMATION | | |
| Packaged Height | 10" | 254 mm |
| Packaged Width | 21" | 533 mm |
| Packaged Depth | 21" | 533 mm |
| Packaged Weight | 18 lb. | 8 kg |
| Item Class | 250 NMFC #26710 | |

* See document CT-104648 for complete Incogneeto™ installation instructions.

| ELECTRICAL SPECIFICATIONS (SINGLE PHASE) | | | |
|--|--------|-------------------------------------|-------------------------------|
| MODEL B651-U2 | | | |
| UNITED STATES/ CANADA | 660801 | 100–120 V, 50/60 Hz, 6 A, 100–650 W | NEMA 5-15P |
| MODEL B652-U2 | | | |
| UNITED STATES/ CANADA | 660901 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | NEMA 6-20P |
| UK/SAUDI ARABIA | 660902 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | BS1363, 13A, 230V |
| INTERNATIONAL | 660903 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | CEE 7/7 Schuko, 16A, 250V |
| AUSTRALIA | 660904 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | AS/NZ 3112:2000, 10A, 250V |
| SOUTH AFRICA | 660907 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | BS 546, 16A, 250V |
| ISRAEL | 660908 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | SI 32, 16A, 250V |

 Dedicated circuit required for each installation.



NEMA 5-15P



AS/NZS 3112:2000,
10A, 250V



NEMA 6-20P



BS 546, 16A, 250V



BS1363, 13A, 230V



CEE 7/7 Schuko,
16A, 250V



SI 32, 16A, 250V

Global Operations

2801 Trade Center Drive / Carrollton, Texas 75007 USA
US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000
Fax: +1 214.379.6073 / www.cooktek.com




HID540A-1 with optional KLP24A legs



Sealed, maintenance-free bearings ensure maximum reliability and contribute to a long machine life



Touch-free infrared sensor dispensing option, providing more sanitary operation



User controlled antimicrobial push-button dispensing option, providing quick and efficient operation

HID540 - Touch-Free Ice & Water Dispenser

Nugget Ice Machine / Dispenser

The Meridian® Difference

Sanitation:

- Touch-free, infrared dispensing of ice and water eliminates the need to physically touch the dispenser for more sanitary operation
- AgION® and other antimicrobial compounds are molded into key components to help inhibit the growth of microbes, bacteria, mold and algae
- Fully removable bin, spouts, air filter, sink, and grill allow for easy cleaning and maintenance
- Sealed refrigeration system minimizes outside airborne contamination
- Front accessible, removable air filter makes cleaning more convenient

Reliability & Ease of Use:

- Sealed, maintenance-free bearings reduce preventative maintenance and ensure maximum reliability
- Produces Scotsman's chewable H² Nugget Ice which is slow-melting and designed for reliable dispensing
- Space-maximizing design – the industry's smallest operational footprint relative to capacity, featuring specially designed contoured sides for enhanced breathability
- Unit-specific QR code for quick access to service manuals and warranty history
- Durable stainless-steel evaporator and exterior panels, plus larger sink opening and dispensing area
- Enhanced service features - Intuitive LED diagnostic lights reduce service time and convenient USB drive allows for fast software updates
- Industry-leading energy and water efficiency along with quieter operation



24 Hour Volume Production

Air Cooled

Water Cooled

| 70°F/21°C 50°F/10°C | Air Water | 90°F/32°C 70°F/21°C | 70°F/21°C 50°F/10°C | Air Water | 90°F/32°C 70°F/21°C |
|------------------------|--------------|------------------------|------------------------|--------------|------------------------|
| 500/227 lb/kg | | 365/166 lb/kg | 500/227 lb/kg | | 400/181 lb/kg |



Specifications

| Model Number | Condenser Unit | Dispensing Method | Storage Capacity lb/kg | Basic Electrical Volts/Hz/Phase | Max. Fuse Size or HACR Circuit Breaker (amps) | Min. Circuit Amps | Energy Consumption kWh/100 lb 90°F(32°C)/70°F(21°C) | Water Usage Gallons/100 lb (liters/45.4 kg) | |
|--------------|----------------|-------------------|------------------------|---------------------------------|---|-------------------|---|---|---------------------------------|
| | | | | | | | | Potable 90°F(32°C)/70°F(21°C) | Condenser 90°F(32°C)/70°F(21°C) |
| HID540A-1 | Air | Touch-Free Sensor | 40/18.1 | 115/60/1 | 15 | Cord | 5.50 | 12/45.5 | - |
| HID540AB-1 | Air | Button Activated | 40/18.1 | 115/60/1 | 15 | Cord | 5.50 | 12/45.5 | - |
| HID540AW-1* | Air | Touch-Free Sensor | 40/18.1 | 115/60/1 | 15 | Cord | 5.50 | 12/45.5 | - |
| HID540W-1 | Water | Touch-Free Sensor | 40/18.1 | 115/60/1 | 15 | Cord | 4.30 | 12/45.5 | 120/454.3 |
| HID540WB-1 | Water | Button Activated | 40/18.1 | 115/60/1 | 15 | Cord | 4.30 | 12/45.5 | 120/454.3 |

*Wall mount configuration. Does not have or accept a drip tray. Unit designed to be installed over existing sink.



H²Nugget Ice

Chewable, slow-melting ice that allows for more reliable dispensing.



3/4" x 5/16" x 3/8"
(1.9 x 0.8 x 0.95 cm)



Certification



Warranty

- 3 years parts and labor.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor

Scotsman®

- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN • Fax: 847-913-9844 • www.scotsman-ice.com • customer.relations@scotsman-ice.com •


HID540 - Touch-Free
Ice Machine / Dispenser

HID540 - Touch-Free Ice & Water Dispenser


Nugget Ice Machine / Dispenser

Without Wall Mount: HID540A(B) & HID540W(B)

Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.
All models include 7.5' power cord with NEMA 5-15P plug.

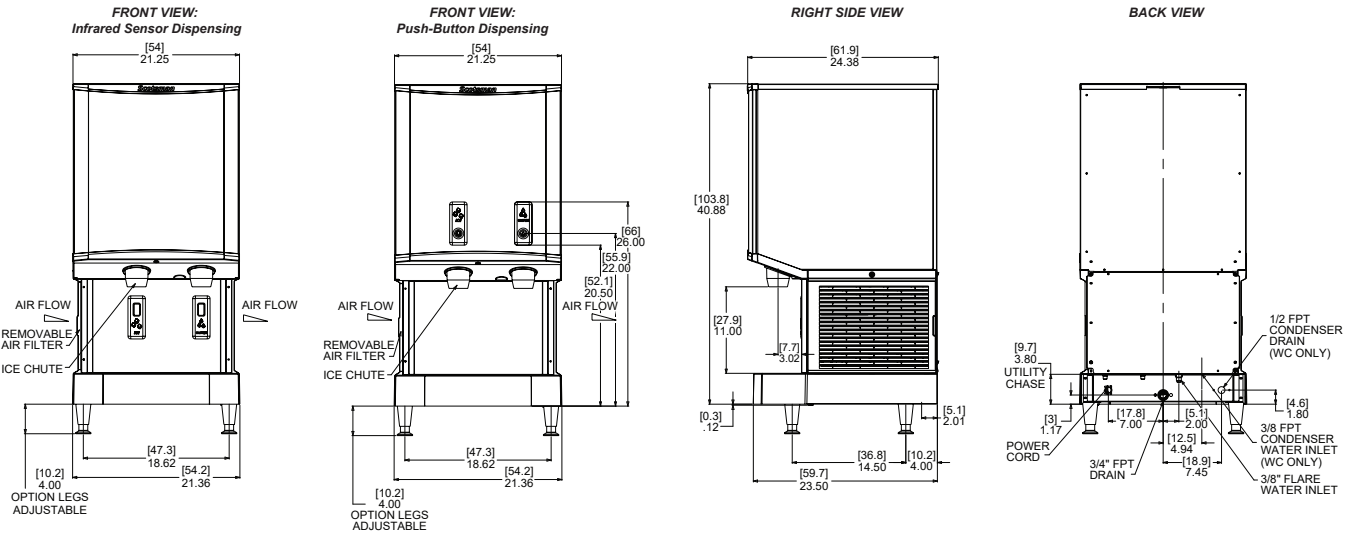

With Wall Mount: HID540AW

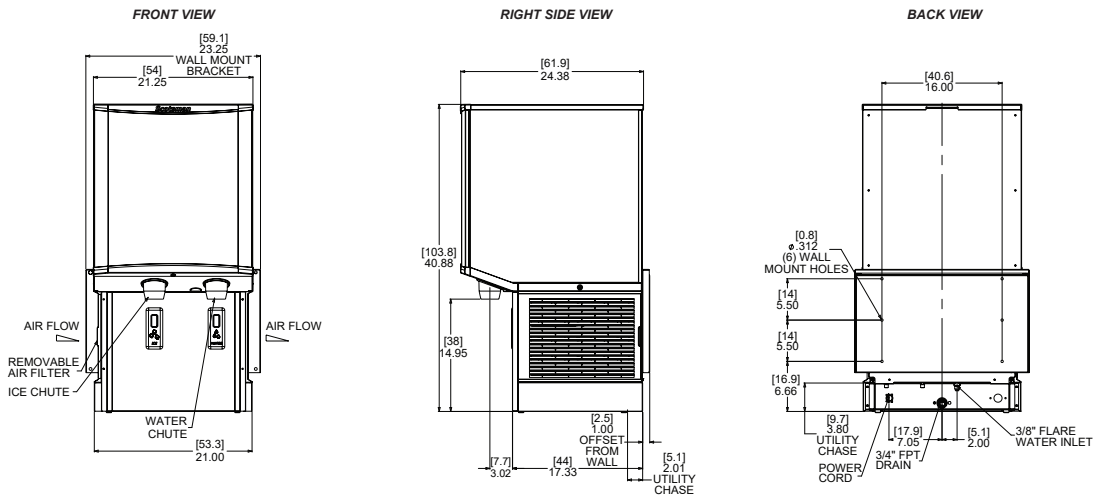

All Models

Dimensions (W x D x H):

Unit:

| | |
|---------------|-----------------------|
| HID540A(B)-1: | 21.25" x 24.38" x 41" |
| HID540AW-1: | 23.25" x 24.38" x 41" |
| HID540W(B)-1: | 21.25" x 24.38" x 41" |

Shipping Carton:

| | |
|---------------|-------------------------|
| HID540A(B)-1: | 24.25" x 27.13" x 47.5" |
| HID540AW-1: | 24.25" x 27.13" x 47.5" |
| HID540W(B)-1: | 24.25" x 27.13" x 47.5" |

Shipping Weight: HID540A(B)-1: 215lb / 98kg
HID540AW-1: 220lb / 100kg
HID540W(B)-1: 215lb / 98kg

BTUs per hour: 6,800

Refrigerant: R-404A



Accessories

Model Number Description

| | |
|----------|--|
| KLP24A | 4" Adjustable legs, box of 4, plastic with metallic foot. |
| HST21-A | Machine stand for HID525 and HID540, with locking reversible door and shelf. |
| HST21B-A | Machine stand for HID525 and HID540, basic version. |

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

| | Minimum | Maximum |
|-------------------------|-------------------|-------------------|
| Air Temperatures | 50°F (10°C) | 100°F (38°C) |
| Water Temperatures | 40°F (4.4°C) | 100°F (38°C) |
| Potable Water Pressures | 20 PSIG (1.4 bar) | 80 PSIG (5.5 bar) |
| Electrical Voltage | -5% | +10% |

Specifications and design are subject to change without notice.

an Ali Group Company



EV9324-01

Insurice Single-i2000² System

Delivers premium quality water for ice applications



Insurice Single-i2000² System: EV9324-01

i2000² Replacement Cartridge: EV9612-22

BENEFITS

Reduces water-related ice machine problems caused by scale build-up from dirt and dissolved minerals

New and improved Micro-Pure II media inhibits the growth of bacteria

Reduces chlorine taste and odor and other offensive contaminants

Self-contained scale inhibitor feed keeps ice machines functioning at full capacity

Reduces maintenance and service costs by reducing scale and clogging of distribution lines, evaporator plate and pump

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size and reduces possible health contaminants such as cysts

Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination

NSF Certified under NSF/ANSI Standards 42 and 53

INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating

Never use saddle valve for connection

Use 3/8" water line

Do not connect system to water-cooled condenser

Install vertically with cartridges hanging down and allow 2-1/2" clearance below the cartridge for easy cartridge replacement

Flush cartridges by running water through system for five minutes at full flow

OPERATION TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when capacity is reached or when pressure falls below 10 psi

Service flow rate must not exceed 1.67 gpm

Always flush the filter cartridge at time of installation and cartridge change

APPLICATION/SIZING

For ice machine applications

Most cubers up to 750 lbs./day

Most flakers up to 1,500 lbs./day

Rated Capacity: 9,000 gallons

SPECIFICATIONS

Overall Dimensions:

27.38"H x 6"W x 4"D

Inlet connection: 3/8"

Outlet connection: 3/8"

Service Flow Rate:

Maximum 1.67 gpm (6.3 Lpm)

Rated Capacity: 9,000 gallons

Pressure Requirements:

10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)


No electrical connection required

Shipping Weight: 6 lbs.

Operating Weight: 9 lbs.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Insurice Single-i2000² System

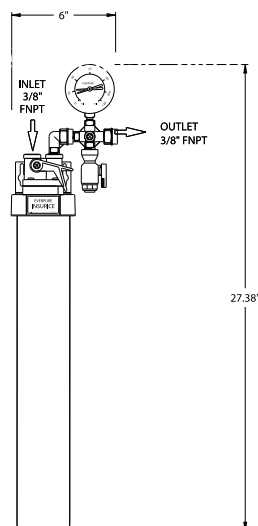

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



System Tested and Certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of:

Standard No. 42: Aesthetic Effects
Chemical Unit
Taste and Odor Reduction
Chlorine Reduction
Mechanical Filtration Unit
Particulate Reduction, Class I:
99.9+% reduction of particles
one-half micron and larger in size
Standard No. 53: Health Effects
Mechanical Filtration Unit
Turbidity Reduction
Cyst Reduction
Asbestos Reduction



EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
N.V. EVERPURE (EUROPE) S.A.
INDUSTRIEPARK WOLFSTEE
TOEKOMSTLAAN 30
B-2200 HERENTALS
BELGIUM
TEL 32 -14-283500
FAX 32-14-283505

In Japan:
EVERPURE JAPAN LLC
HASHIMOTO MN BLDG. 7F
3-25-1 HASHIMOTO SAGAMIHARA-SHI
KANAGAWA 229-1103
JAPAN
TEL 81-(0)42-775-3011
FAX 81-(0)42-775-3015

Everpure, LLC
1040 Muirfield Drive
Hanover Park, IL 60133
Ph: 630-307-3000 Fax: 630-307-3030

REACH-IN WARMING CABINETS

Full Door

HS-1D-1
HS-2D-1
HSA-1D-1
HSA-2D-1

Half Door

HS-1D-1-HD
HS-2D-1-HD
HSA-1D-1-HD
HSA-2D-1-HD

- Equipped with Secure-Temp 1.0™ Technology™
- 3 Year Parts & Labor Warranty Plus an Additional 2 Year Compressor Warranty
- Exclusive 2 Year Warranty on Santoprene Door Gaskets

VICTORY ULTRASPEC

FEATURING: **SecureTemp**
1.0

Secure-Temp 1.0™ is the industry's first and only full service temperature monitoring solution for your kitchen. Secure-Temp 1.0™ is standard on all Victory models and is HACCP compliant & meets NAFEM's data protocol.

There are NO software or monthly monitoring fees.
Optional add on kits are available for additional units.

STANDARD FEATURES

- Secure-Temp 1.0™ Technology
- Full Electronic Control System
- Adjustable Electronic Temp Control from 80°F to 180°F
- Built-in, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Foamed-in-Place Polyurethane Insulation
- Heavy Duty Cylinder Locks
- Santoprene Door Gaskets with Exclusive 2 Year Warranty
- Self-Closing Doors with 120° Hold Open Feature
- Cam-Lift Hinges, Guaranteed for Life
- Ergonomically Correct Door Handles, Guaranteed for Life
- 6" High, Adjustable Stainless Steel Legs
- A Series has 6" High Standard Black Legs
- Proximity Door Switch Activates Interior Incandescent Lighting
- One Piece, Snap-In Magnetic Door Gasket(s)
- Stainless Steel Interior Door Liner
- Three (3) Chrome Plated Wire Shelves per Cabinet Section
- 10' Cord & Plug Standard



HS-2D-1-HD

OPTIONS & ACCESSORIES

- **6" or 3" Overall Height Casters (Set of 4)**
- Correctional Facilities Options
- Stainless Steel Shelves
- 6" Stainless Steel Kick Plate
- Exterior Laminate Décor
- Finished Back with Rear Grille
- Stainless Steel Case Back and Shroud
- Optional Voltages (single section only)



CABINET CONSTRUCTION

The cabinet front and doors are constructed of heavy gauge, polished stainless steel to maintain an attractive appearance after years of heavy use. Polyurethane foam insulation throughout ensures the ultimate in energy efficiency.

DOOR CONSTRUCTION

The doors are heavy gauge, polished stainless steel with a stainless steel interior liner. Each door is provided with a cylinder lock and ergonomically correct vertical handle. The door hinges are self-closing and have a hold-open feature at 120° which facilitates product loading. Proximity switches energize the recessed interior incandescent lighting when the door is opened.

HEATING SYSTEM

The safety shielded, "strip type" heaters located at the bottom of the cabinet interior are precisely controlled by the V-TEMP™ electronic control with a temperature range from 80°F to 180°F. An externally mounted blower system ensures even temperatures throughout the cabinet interior. A built-in, adjustable humidity control vent allows the operator to maintain a moist or more dry environment.

INTERIOR STORAGE ARRANGEMENTS

Each cabinet section is provided with three (3) heavy-duty, chrome plated wire shelves. The shelves are adjustable in one inch increments. A wide door opening allows for the use of a variety of optional pan slide configurations including 18" x 26" and 12" x 20" pans.

ELECTRONIC CONTROL SYSTEM

The easy to use V-TEMP™ Control is provided standard with a two year parts and labor warranty. This durable, water resistant microprocessor monitors and controls the entire temperature maintenance process. It includes an ON/OFF switch located on the control face, interior light switch, LED temperature indicator in °C or °F, a HI/LO audio/visual temperature alarm, and a door ajar alarm. The control has a set point memory. Upon start up, the unit will warm up to the last temperature set point. A manager's "lock-out" feature is provided to safeguard pre-determined control settings.


| CHARACTERISTICS | 1 SECTION | 2 SECTION |
|-------------------------------|-----------|-----------|
| Width, Overall (in.) | 26 1/2" | 52 1/8" |
| Depth, Overall (inc. Handles) | 35" | 35" |
| Depth, Door(s) Open 90° | 56 3/4" | 56 3/4" |
| Height Overall (in.) | 84 1/4" | 84 1/4" |
| Capacity Net (cu ft) | 21.5 | 46.5 |
| No. Full Doors | 1F, 2H | 2F, 4H |
| No. of Shelves | 3 | 6 |

ELECTRICAL DATA

| | | |
|--------------------------------------|--------------|--------------|
| Cabinet Voltage | 208-240/60/1 | 208-240/60/1 |
| Heater Watts per Section (@240V) | 1500 | 1500 |
| Total Wattage (Heaters & Fan @ 240V) | 1500 | 3000 |
| Feed Wires | 2 | 2 |
| NEMA Plug | 6-20P | 6-20P |
| Total Amperes | 6.3 | 13 |

NOTE: Plug style, voltage and full load amps may vary depending on certain options selected such as optional voltages and compressor upgrades.

| CRATED DIMENSIONS | HEIGHT | WIDTH | DEPTH | FT ³ | LBS |
|-------------------|---------|---------|-------|-----------------|-----|
| ONE SECTION | 84 1/2" | 36 | 43 | 75.70 | 320 |
| TWO SECTION | 84 1/2" | 59 1/4" | 43 | 124.59 | 440 |

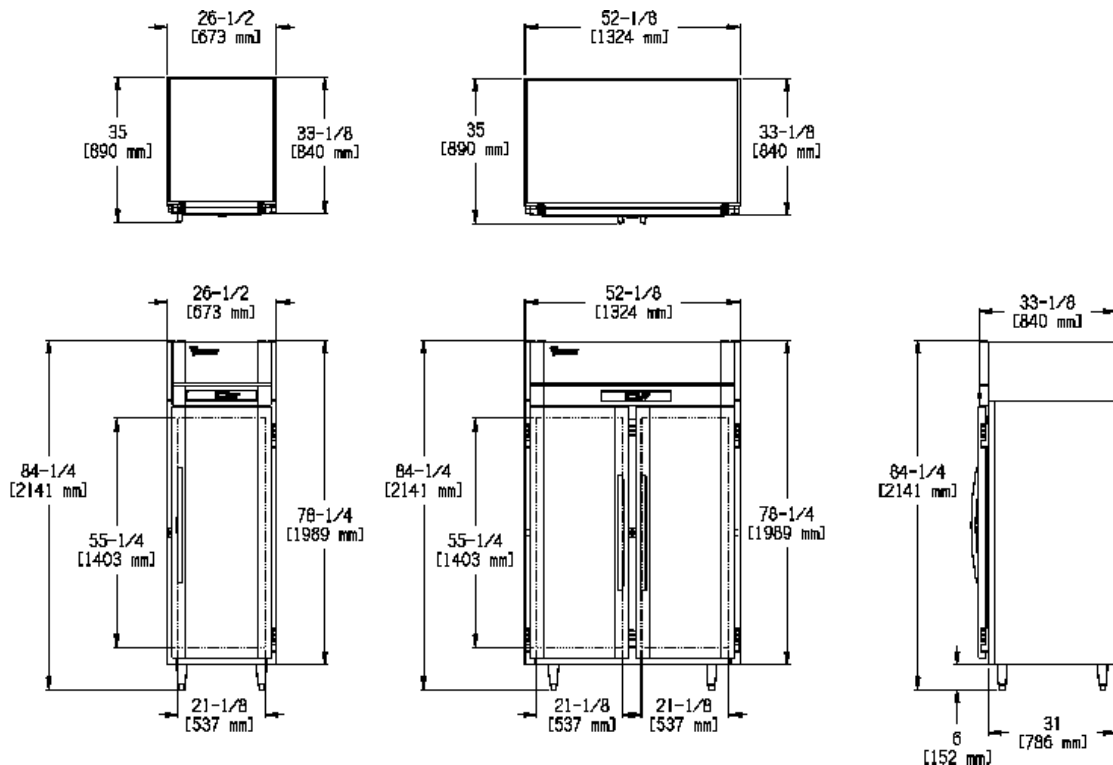




Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

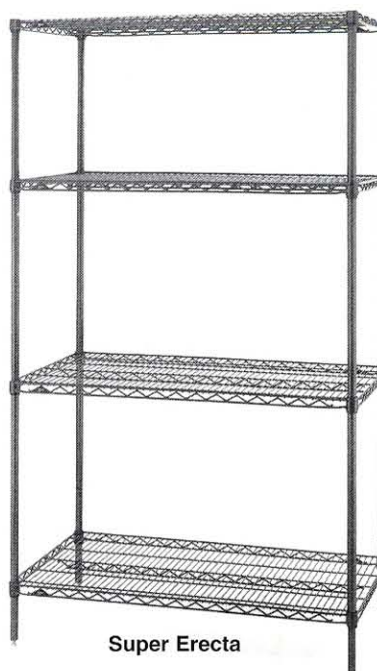

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.

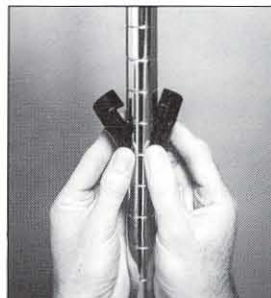

Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

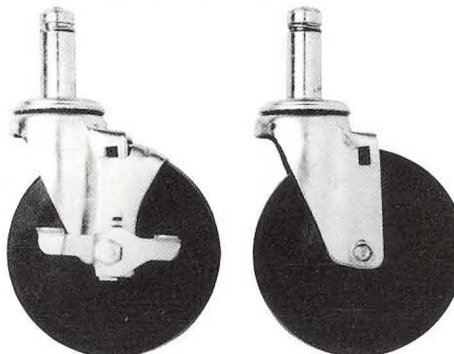

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

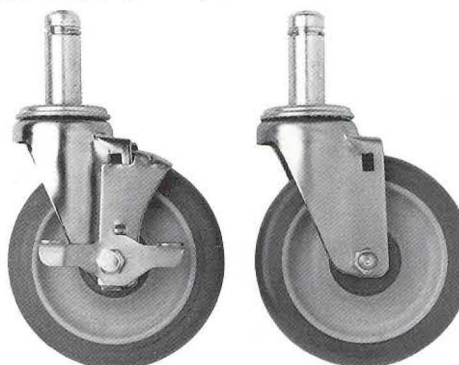

5MDBGSA

5MDGSA

Polymer Horn Casters

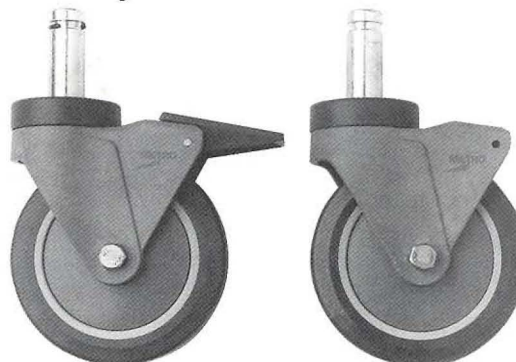

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — 6 7/8" ± 1/16" (155 ± 1.5mm).

NOTE 4: Load Height for 4LD caster — 4 5/8" ± 1/16" (118 ± 1.5mm).

NOTE 5: Load Height for 5LD caster — 5 5/8" ± 1/16" (143 ± 1.5mm).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5MD and 5MP casters — 6 7/8" ± 1/16" (155 ± 1.5mm).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided**.

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

1200-UP SERIES

LOW TEMPERATURE HOT HOLDING CABINETS



SHOWN WITH UNIVERSAL
PAN SLIDES




- HALO HEAT...a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Holds hot food hot...meat, poultry, fish, potatoes, casseroles, vegetables, rolls, etc.
- Dual purpose — both a holding cabinet and dough proofer.
- Universal rack design accommodates standard full-size (gastronorm) pans or full-size sheet pans.
- Can be converted with side racks to accommodate shelves for full size gastronorm pans or full size sheet pans.
- Stainless steel interior resists corrosion.
- Casters provide easy mobility.
- Antimicrobial handle retards the growth of illness-causing pathogens.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Door venting holds crispy food better.


Two (2) individually controlled oven compartments are enclosed in one 20 gauge stainless steel exterior and doors. Each controlled compartment has one (1) Simple Control with ON/OFF power switch; Up and Down Arrow Keys with a temperature range of 60° to 200°F (16° to 93°C); indicator light, and digital display. Each compartment is equipped with two (2) universal side rails and four (4) sets of chrome plated pan slides designed to accommodate standard full-size pans. Pan supports are adjustable in sixteen (16) positions on 1-3/4" (44mm) centers, and one (1) set of 5" (127mm) heavy duty casters – 2 rigid and 2 swivel with brake.

☐ **MODEL 1200-UP** Double compartment holding cabinet

DELUXE CONTROL OPTION



- ☐ Solid state electronic control option simplifies temperature setting and has a clear, easy-to-read LED display and includes our patented SureTemp™ heat recovery system. SureTemp™ reacts immediately to compensate for any loss of heat whenever the door is opened.
- ☐ Deluxe control is also available with six independent multiple timers for each compartment to facilitate "first-in, first-out" concept.
- ☐ Deluxe control with internal temperature probe.



ANSI/NSF 4



IP X4



FACTORY INSTALLED OPTIONS

- Electrical Choices
 - ☐ 120V
 - ☐ 208-240V (2000W)
 - ☐ 208-240V (4000W)
 - ☐ 230V (2000W)
 - ☐ 230V (4000W)
- Cabinet Choices
 - ☐ Reach-In, standard
 - ☐ Pass-Through, optional
- Door Choices
 - ☐ Solid Door, standard
 - ☐ Window Door, optional

- Door Swing Choices
 - ☐ Right-hand swing, standard
 - ☐ Left-hand swing, optional

Note: Pass-through cabinets cannot have all doors hinged on the same side.

- ☐ Handle Kit, Push/Pull
- SET OF FOUR (55662)

ADDITIONAL FEATURES

- Side Rack Model
 - ☐ As an alternative to pan slides, this unit can be ordered as a "side rack" model which is equipped with two (2) side racks and three (3) chrome plated wire shelves. It will accommodate full and half size US hotel and European gastronorm pans on the side racks, or sheet pans on shelves.



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA


FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



1200-UP SERIES

LOW TEMPERATURE HOT HOLDING CABINETS

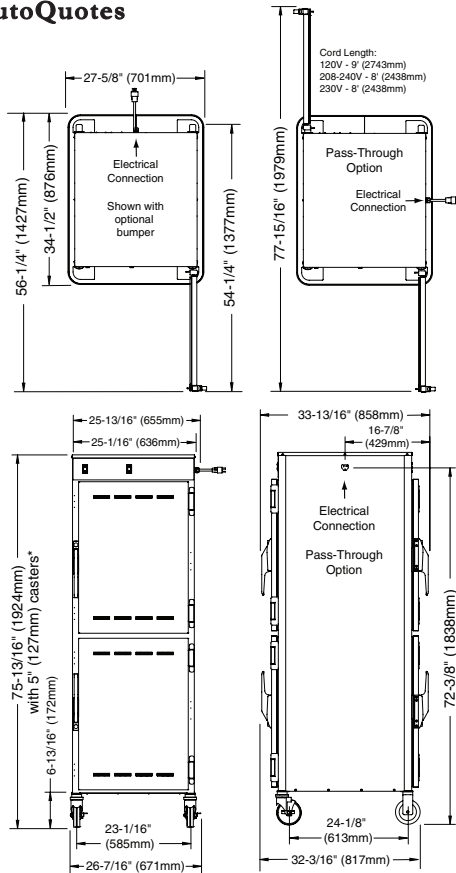

*74-1/16" (1881mm) - with optional 3-1/2" (89mm) casters
*75-5/8" (1921mm) - with optional 6" (152mm) legs

PRODUCT \ PAN CAPACITY (PER COMPARTMENT)

192 lbs (87kg) MAXIMUM • VOLUME MAXIMUM: 120 QUARTS (152 LITERS)

Pan slides (2 per set) - 1-3/4 (44mm) centers

| Pan Size | Four (4) sets of pan slides provided | Maximum capacity with additional pan slides |
|--|--------------------------------------|---|
| FULL SIZE: 20" x 12" x 2-1/2" GN1/1: 530mm x 325mm x 65mm | Eight (8) pans - 2 per set of slides | Sixteen (16) pans - with 4 additional sets of pan slides |
| FULL SIZE: 20" x 12" x 4" GN1/1: 530mm x 325mm x 100mm | Eight (8) pans - 2 per set of slides | NO ADDITIONAL CAPACITY |
| FULL SIZE: 20" x 12" x 6" 530mm x 325mm x 150mm | Eight (8) pans - 2 per set of slides | NO ADDITIONAL CAPACITY |
| FULL SIZE SHEET PANS: 18" x 26" x 1" | Four (4) pans - 1 per set of slides | Sixteen (16) pans - with 12 additional sets of pan slides |

Side Racks and Shelves

| Pan Size | Three (3) shelves provided | Maximum capacity with additional shelves |
|--|-------------------------------------|--|
| FULL SIZE: 20" x 12" x 2-1/2" GN1/1: 530mm x 325mm x 65mm | Sixteen (16) pans - 2 per side rack | NO ADDITIONAL CAPACITY |
| FULL SIZE: 20" x 12" x 4" GN1/1: 530mm x 325mm x 100mm | Eight (8) pans - 2 per side rack | NO ADDITIONAL CAPACITY |
| FULL SIZE: 20" x 12" x 6" GN1/1: 530mm x 325mm x 150mm | Eight (8) pans - 2 per side rack | NO ADDITIONAL CAPACITY |
| FULL SIZE SHEET PANS: 18" x 26" x 1" | Three (3) pans - 1 per shelf | Eight (8) pans with 5 additional shelves |

ELECTRICAL

| VOLTAGE | PHASE | CYCLE/HZ | AMPS | KW | CORD & PLUG |
|-------------|-------|----------|------|-----|---------------------------|
| 120 | 1 | 60 | 16.0 | 1.9 | NEMA 5-20P, 20A-125V PLUG |
| 208 (2000W) | 1 | 60 | 7.0 | 1.4 | NEMA 6-15P, 15A-250V PLUG |
| 240 (2000W) | 1 | 60 | 8.0 | 1.9 | (USA ONLY) |
| 208 (4000W) | 1 | 60 | 14.0 | 2.9 | NO CORD |
| 240 (4000W) | 1 | 60 | 16.0 | 3.8 | OR PLUG |
| 230 (2000W) | 1 | 50/60 | 7.7 | 1.8 | PLUGS RATED |
| 230 (4000W) | 1 | 50/60 | 15.4 | 3.5 | 250V |

CEE 7/7 CH2-16P BS 1363 AS/NZS 3112

WEIGHT

| | | |
|--------------------------------|--|------------------------------|
| NET: | 333 lb (151g) | SHIP: (EST.) 393 lb (178 kg) |
| CARTON DIMENSIONS: (L x W x H) | 35" x 35" x 82" (889mm x 889mm x 2083mm) | |

DIMENSIONS: H x W x D

| | |
|----------------------------|--|
| EXTERIOR: | 75-13/16" x 26-7/16" x 32-3/16" (1924mm x 671mm x 817mm) |
| PASS-THROUGH: | 75-13/16" x 26-7/16" x 33-13/16" (1924mm x 671mm x 858mm) |
| INTERIOR EACH COMPARTMENT: | 28-3/4" x 21-5/16" x 26-1/2" (730mm x 541mm x 673mm) |

INSTALLATION REQUIREMENTS

- Oven must be installed level.
- The oven must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.
- Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector. NOT FACTORY SUPPLIED.

CLEARANCE REQUIREMENTS

| | | |
|-----------------|----------------|------------------|
| BACK: 3" (76mm) | TOP: 2" (51mm) | SIDES: 1" (25mm) |
|-----------------|----------------|------------------|

OPTIONS & ACCESSORIES

| | | | |
|--|----------|---|----------|
| <input type="checkbox"/> Bumper, Full Perimeter | 5012932 | <input type="checkbox"/> Shelf, Stainless Steel | SH-23738 |
| <input type="checkbox"/> Casters, 3-1/2" (76mm) - 2 RIGID, 2 SWIVEL W/ BRAKE | 5008017 | <input type="checkbox"/> Shelf, Chrome Plated | SH-2733 |
| <input type="checkbox"/> Door Lock with Key (EACH HANDLE) | LK-22567 | Universal Pan Slides (2 REQUIRED) | |
| <input type="checkbox"/> Legs, 6" (152mm), Flanged (SET OF FOUR) | 5011149 | <input type="checkbox"/> Chrome Plated | SR-24447 |
| <input type="checkbox"/> Pan Grid, Chrome Plated, Wire | PN-2115 | <input type="checkbox"/> Stainless Steel | SR-24762 |
| PAN INSERT 18" x 26" (457mm x 660mm x 25mm) | | <input type="checkbox"/> Water Reservoir Pan (FOR PROOFING) | 1775 |
| <input type="checkbox"/> Drip Pan with Drain 1-11/16" (43mm) | 5014448 | <input type="checkbox"/> Water Reservoir Pan Cover | 1774 |
| <input type="checkbox"/> Security Panel with Lock | 5013936 | | |





T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690


Model No.

B-0230

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

109a

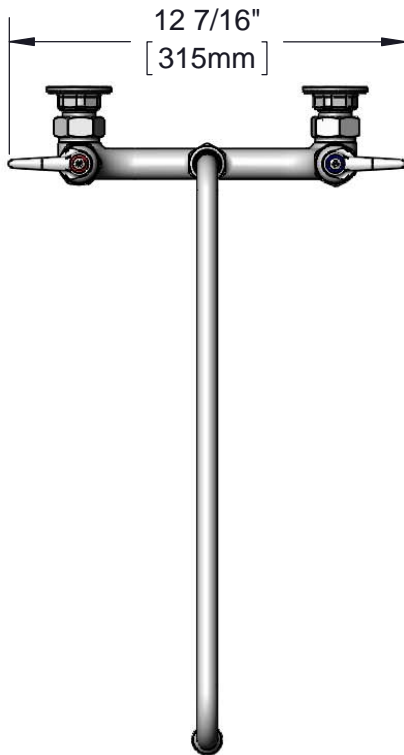

ADA Compliant

This Space for Architect/Engineer Approval


Job Name _____ Date _____

Model Specified _____ Quantity _____



Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____

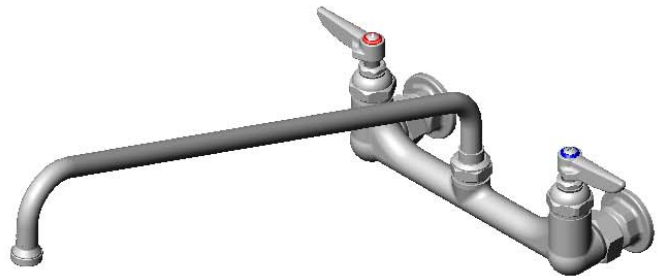

Eterna Cartridges &
Lever Handles w/
Color Coded Indexes

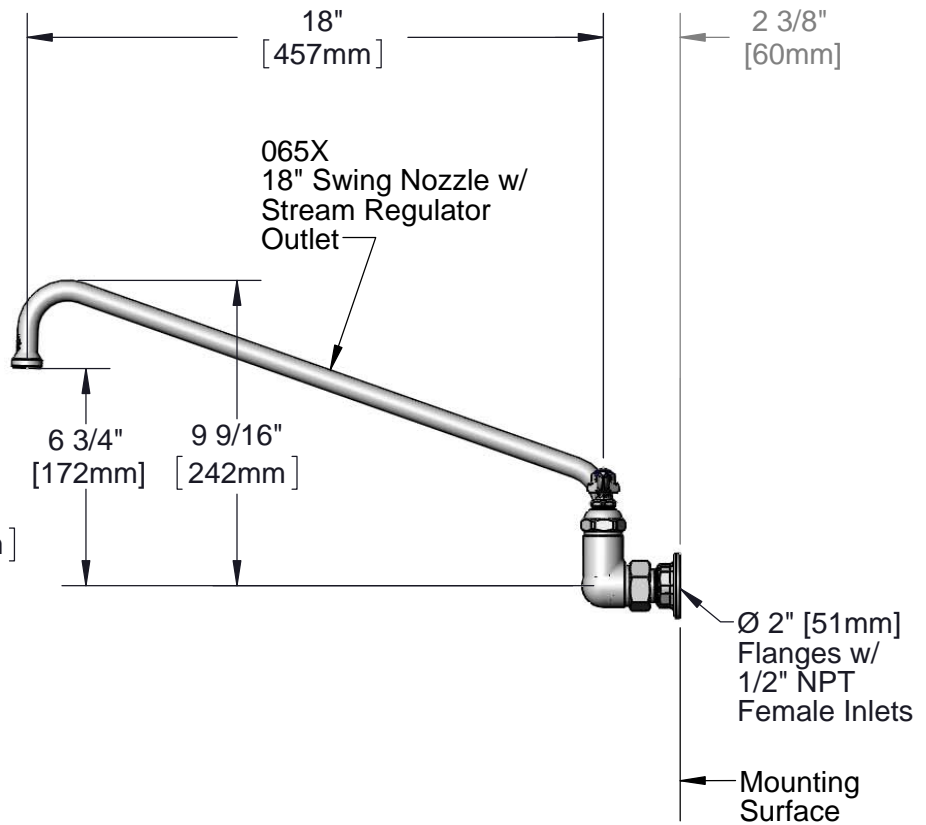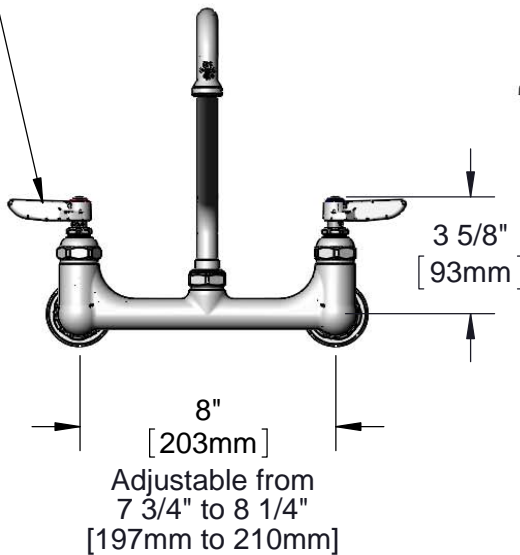

Product Specifications:

8" Wall Mount Mixing Faucet, Eterna Cartridges, Lever Handles,
18" Swivel Nozzle & 1/2" NPT Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690


Model No.

B-0230

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

| ITEM NO. | SALES NO. | DESCRIPTION |
|----------|-----------|--|
| 1 | 065X | 18" Swing Nozzle |
| 2 | B-PT | Stream Regulator Outlet |
| 3 | 001048-45 | Nozzle Tip Washer |
| 4 | 000922-45 | Lever Handle Screw |
| 5 | 001661-45 | Red Index-HW |
| 6 | 001638-45 | Lever Handle |
| 7 | 005960-40 | Eterna Cartridge, RTC |
| 8 | 009538-45 | Swivel Washer |
| 9 | 011429-45 | Swivel Sleeves (2) |
| 10 | 001074-45 | O-Ring |
| 11 | 001660-45 | Blue Index-CW |
| 12 | 005959-40 | Eterna Cartridge, LTC |
| 13 | 001019-45 | Coupling Nut Washer |
| 14 | 00AA | 1/2" NPT Female Eccentric Flange |
| 15 | 002713-40 | Eterna Cartridge, LTC w/ Handle, Index & Screw |
| 16 | 002714-40 | Eterna Cartridge, RTC w/ Handle, Index & Screw |

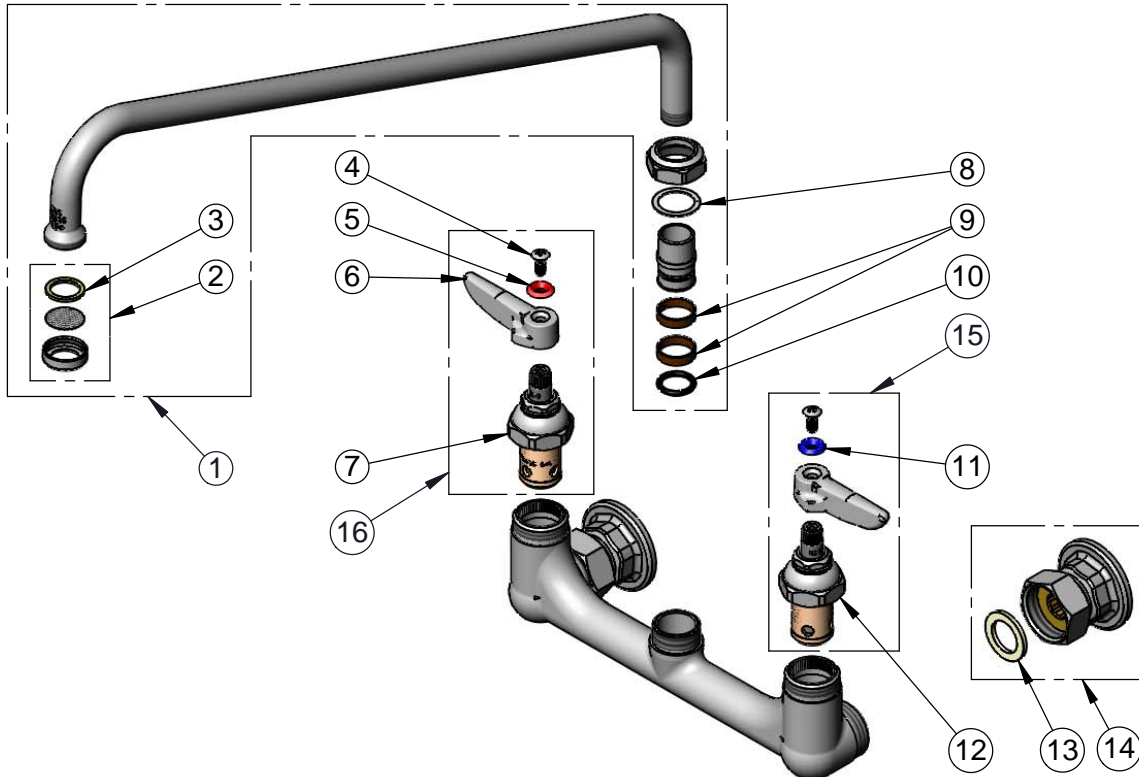

Product Specifications:

8" Wall Mount Mixing Faucet, Eterna Cartridges, Lever Handles,
18" Swivel Nozzle & 1/2" NPT Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)




with Microban® Antimicrobial Protection

Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

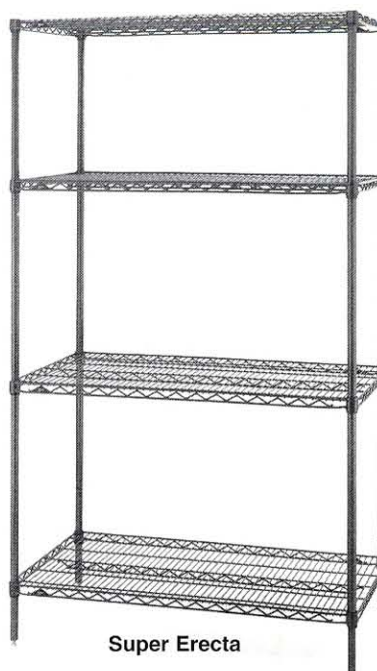

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.



Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

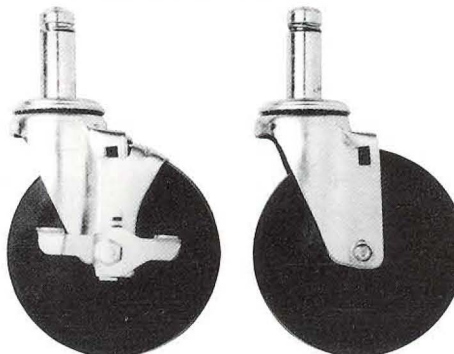

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

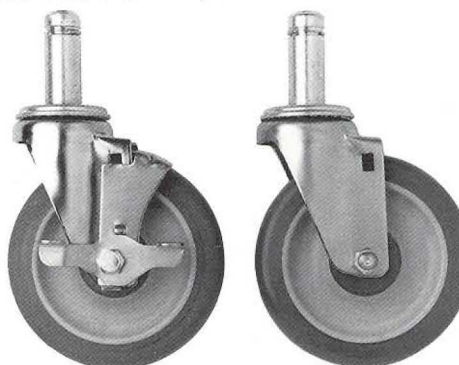

5MDBGSA

5MDGSA

Polymer Horn Casters

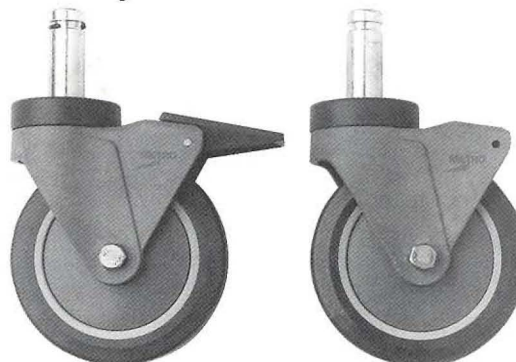

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: Load Height for 4LD caster — $4\frac{5}{8}'' \pm \frac{1}{16}''$ ($118 \pm 1.5\text{mm}$).

NOTE 5: Load Height for 5LD caster — $5\frac{5}{8}'' \pm \frac{1}{16}''$ ($143 \pm 1.5\text{mm}$).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided**.

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.




with Microban® Antimicrobial Protection

Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

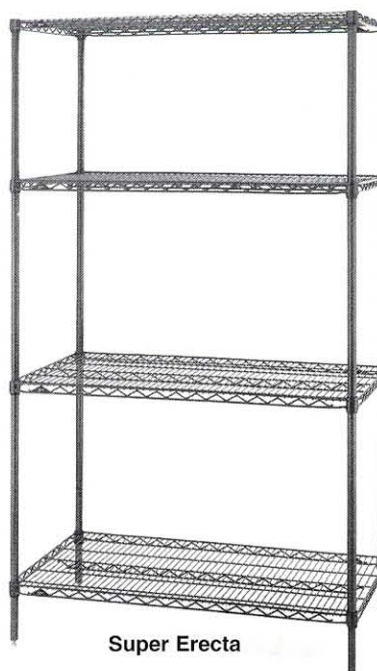

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.

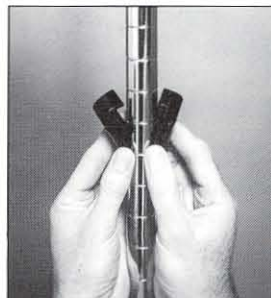

Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

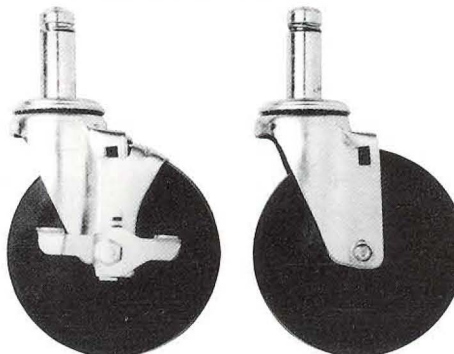

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

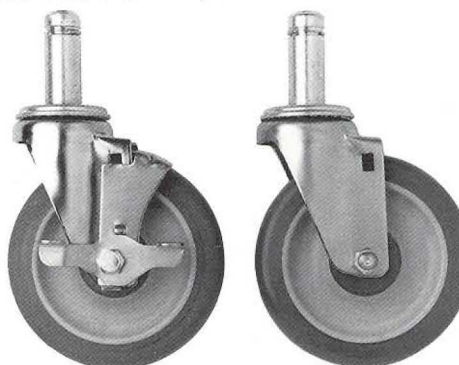

5MDBGSA

5MDGSA

Polymer Horn Casters

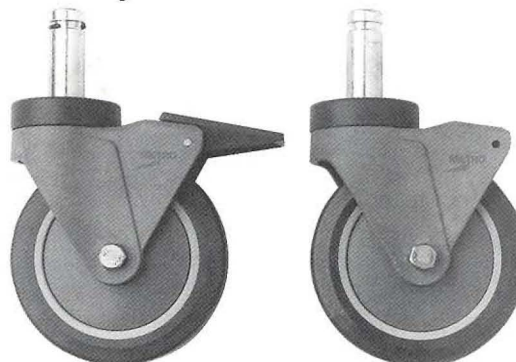

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: Load Height for 4LD caster — $4\frac{5}{8}'' \pm \frac{1}{16}''$ ($118 \pm 1.5\text{mm}$).

NOTE 5: Load Height for 5LD caster — $5\frac{5}{8}'' \pm \frac{1}{16}''$ ($143 \pm 1.5\text{mm}$).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided**.

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.




Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

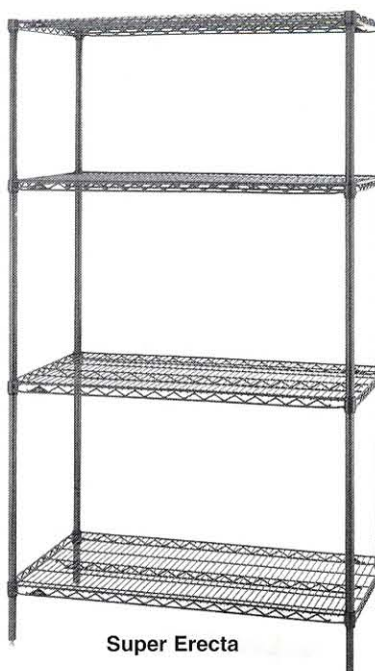

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.

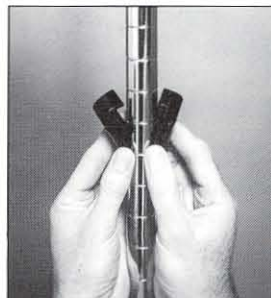

Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

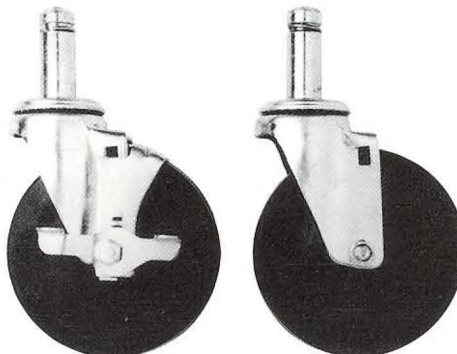

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

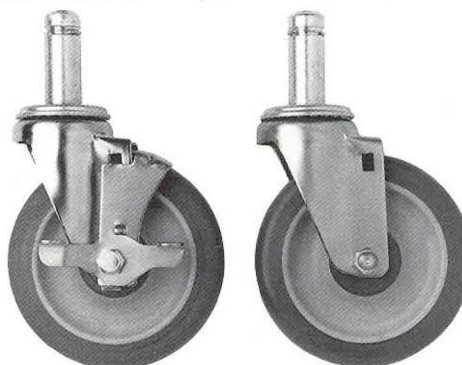

5MDBGSA

5MDGSA

Polymer Horn Casters

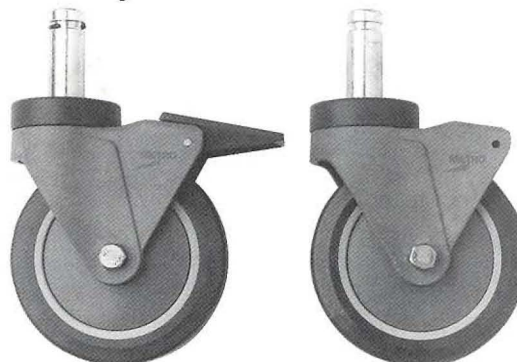

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: Load Height for 4LD caster — $4\frac{5}{8}'' \pm \frac{1}{16}''$ ($118 \pm 1.5\text{mm}$).

NOTE 5: Load Height for 5LD caster — $5\frac{5}{8}'' \pm \frac{1}{16}''$ ($143 \pm 1.5\text{mm}$).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided**.

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.



Item # _____

Job _____



ADJUSTABLE POLYMER "POKER CHIP" DISH DOLLY PCD SERIES

with *Microban® Antimicrobial
Product Protection

- **Microban® Antimicrobial Product Protection:** Polymer surfaces have built-in Microban® Antimicrobial Product Protection which inhibits the growth of bacteria, mold, mildew, and fungi that cause odors, stains, and product degradation.
- **Unique Design:** System of adjustable, removable dividers and removable tower promote flexibility and maximum loading density. Adjustments to dividers are made on underside of chassis to minimize tampering with settings.
- **Flexible:** Facilitates storage and handling of dishes, from fruits to dinner plates. Can accommodate multiple size dishes.
- **Adjustable:** Dividers and tower compensate for changes in dishes, and situations where dolly selection/specification is done prior to dish selection.
- **Sturdy Containment:** Columns of dishes are held safely within the borders of the dolly, preventing spillage and breakage.
- **Sanitary:** Dividers and tower are removable to facilitate dolly cleaning. Vinyl cover protects clean dishes during storage.
- **Cost Efficient:** Two-handed access to each dish column minimizes dish breakage and promotes quick table set ups. High-storage density means fewer dollies required.
- **Durable Construction:** High-density polymer shell makes dish dollies resistant to cracking, peeling or chipping. Includes integrally-molded bumpers.
- **Maneuverable:** 5" (127mm) diameter swivel casters (two with brakes) with neoprene wheels provide easy rollability and positioning.
- **Compact Design:** Dolly stores conveniently under counters.
- **Vinyl Cover:** Protects clean dishes from dust and water splashes while in storage. Cover is provided with each dolly.
- **NSF Listed.**



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



Job _____



ADJUSTABLE POLYMER "POKER CHIP" DISH DOLLY PCD SERIES

Specifications

Material: High-density polymer containing Microban Antimicrobial product protection.

Construction: Seamless, molded polymer construction, equipped with handgrips on all four sides.

Casters: Four B5DN swivel casters (two with brakes). Ball bearing swivel; ball bearing axle. Nickel-plated, pre-lubricated casters with neoprene tires. Casters are bolted to an internal metal support plate.

Protective Cover: Standard 6-mil vinyl cover.

Standard Unit: Four dividers, center column and protective cover provided with each dolly.

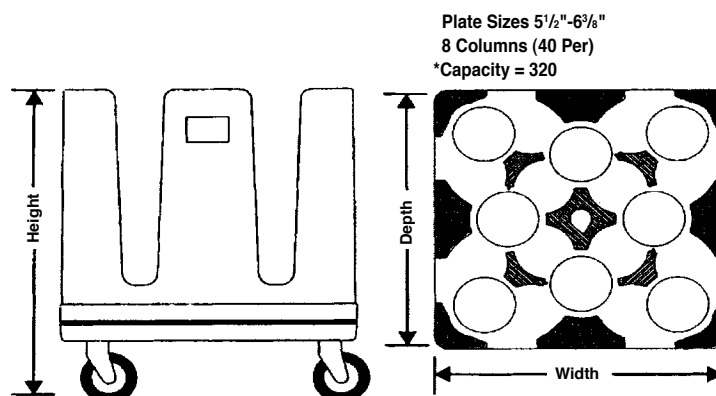


Plate Sizes 5 1/2"-6 3/8"
8 Columns (40 Per)
*Capacity = 320

Dimensions

| Model No. | Height (in.) (mm) | Width (in.) (mm) | Depth (in.) (mm) | Approx. Pkd. Wt. (lbs.) (kg) |
|-----------|----------------------|---------------------|---------------------|------------------------------------|
| PCD11A | 31 7/8 779 | 26 5/8 651 | 26 5/8 651 | 65 30 |

Accessories

| Model No. | Description |
|-----------|-----------------------|
| AD11A | 4 Additional Dividers |
| PCDV11A | Additional Cover |

*Loading capacity depends upon china shape and thickness. Usable column height is 20" (508mm).

SAMPLE CONFIGURATIONS (Standard Unit)

Plate Sizes 6 1/2"-7 3/8"
8 Columns
*Capacity = 320




Plate Sizes 7 1/2"-8 1/2"
5 Columns (60 Per)
*Capacity = 300




Plate Sizes 8 5/8"-9 1/4"
4 Columns (60 Per)
*Capacity = 240





Plate Sizes 9 5/8"-11 1/4"
4 Columns (60 Per)
*Capacity = 240



SAMPLE CONFIGURATIONS (Accessory Dividers Required)

Plate Sizes 4 1/4"-4 5/8"
16 Columns (40 Per)
*Capacity = 640







Plate Sizes 4 3/4"-5 3/8"
12 Columns (40 Per)
*Capacity = 480



4 Columns (40 Per) 4 1/4"-4 5/8"
2 Columns (60 Per) 7 1/2"-9 1/2"
3 Columns (40 Per) 4 3/4"-5 3/8"



8 Columns (40 Per) 4 1/4"-4 5/8"
2 Columns (60 Per) 7 1/2"-9 1/2"



All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

L02-100A
Printed in U.S.A. Rev. 1/06

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2003 InterMetro Industries Corp.



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

B-0221

Item No.

122a

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ADA Compliant

This Space for Architect/Engineer Approval



Job Name _____ Date _____

Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____

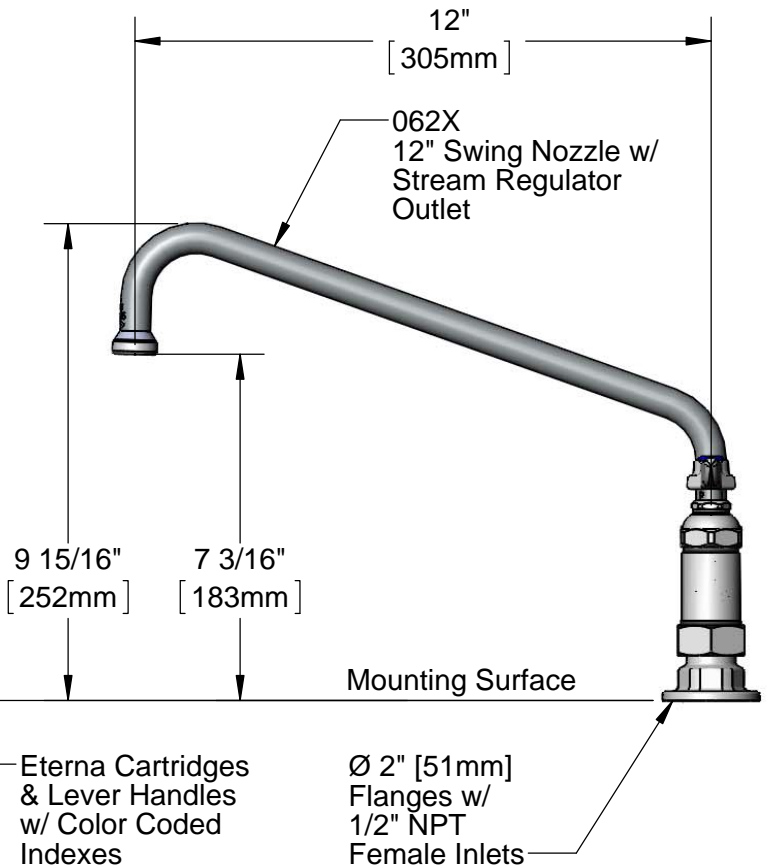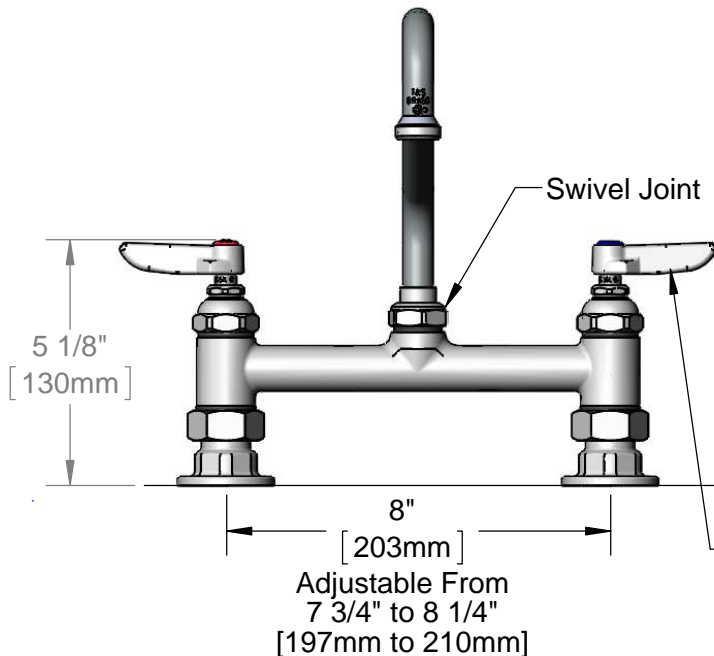

Product Specifications:

8" Deck Mount Mixing Faucet, Eterna Cartridges, Lever Handles, 12" Swing Nozzle & 1/2" NPT Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)




T&S BRASS AND BRONZE WORKS, INC.
2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.
B-0221

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

| ITEM NO. | SALES NO. | DESCRIPTION |
|----------|-----------|--|
| 1 | B-PT | Stream Regulator Outlet |
| 2 | 001048-45 | Nozzle Tip Washer |
| 3 | 062X | 12" Swing Nozzle |
| 4 | 009538-45 | Swivel Washer |
| 5 | 011429-45 | Swivel Sleeves (2) |
| 6 | 001074-45 | O-Ring |
| 7 | 001661-45 | Red Index-HW |
| 8 | 000922-45 | Lever Handle Screw |
| 9 | 001660-45 | Blue Index-CW |
| 10 | 001638-45 | Lever Handle |
| 11 | 005959-40 | Eterna Cartridge, LTC |
| 12 | 002713-40 | Eterna Cartridge, LTC w/ Handle, Index & Screw |
| 13 | 001019-45 | Coupling Nut Washer |
| 14 | 00AA | 1/2" NPT Female Eccentric Flange |
| 15 | 002714-40 | Eterna Cartridge, RTC w/ Handle, Index & Screw |
| 16 | 005960-40 | Eterna Cartridge, RTC |

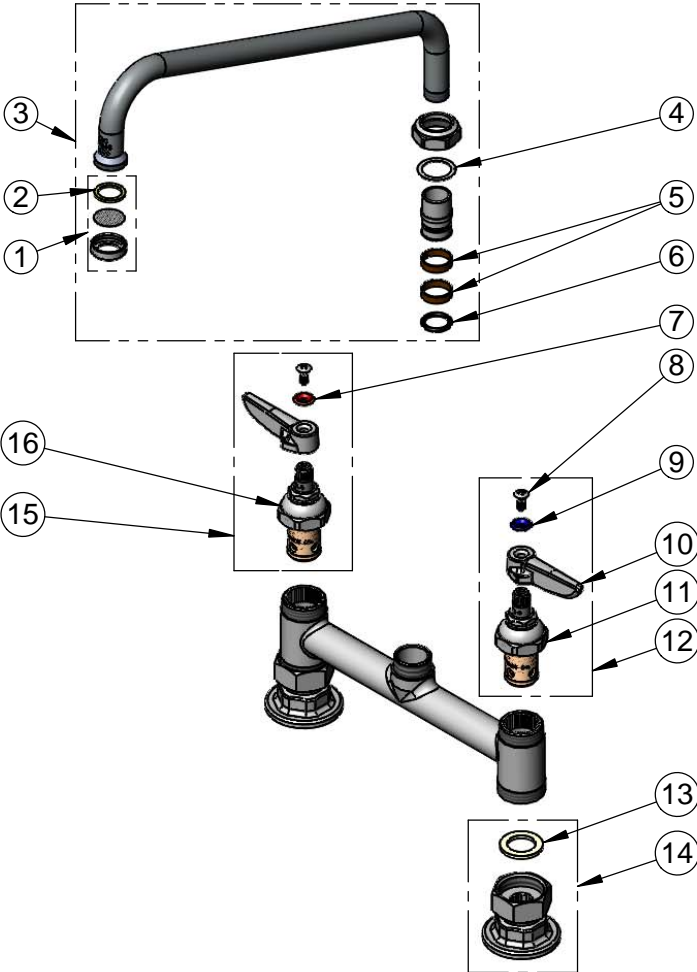

Product Specifications:
8" Deck Mount Mixing Faucet, Eterna Cartridges, Lever Handles,
12" Swing Nozzle & 1/2" NPT Female Inlets

Drawn: DHL Checked: JRM Approved: JHB Date: 03/13/14

Product Compliance:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)

Scale: NTS Sheet: 2 of 2

Specification Sheet

Short Form Specifications

Eagle Stainless Steel Utility Cart, model _____. Three stainless steel shelves welded to angle legs. Galvanized caster channel frame. Available with standard 1"-high upturn on ends and rear of top and center shelves, or 1"-high upturn on all sides of all shelves. Four 4"-diameter swivel plate casters. 1"-diameter handle on one end.



cart with upturns on ends and rear of top and center shelves



cart with upturns on all sides of all shelves

Options / Accessories

- ☐ Non-marking casters
- ☐ Corner leg bumpers
- ☐ Additional handle (for other end)
- ☐ Cart covers

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division.

Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Stainless Steel Utility Carts

MODELS:

- ☐ UC-311
- ☐ UC-322

- ☐ UC-411
- ☐ UC-422

- ☐ UUC-311
- ☐ UUC-322

- ☐ UUC-411
- ☐ UUC-422

Features on all carts...

- Three stainless steel shelves.
- Type 430 stainless steel shelves and angle legs.
- Galvanized bottom frame consists of front-to-back caster channels and left-to-right support angles.
- 1" (25mm)-high upturns.
- Each shelf is hemmed for further strength and stability.
- 12½" (318mm) shelf clearance.
- Legs provided with bumpers.
- 4" (76mm)-diameter swivel plate casters.
- 1" (25mm)-diameter handle welded to angle legs.
- Corrosion- and stain-resistant.
- Polished stainless steel finish allows for ease of cleaning and sanitation.

Standard Duty Carts...

- 22-gauge stainless steel shelves.
- 18-gauge stainless steel angle legs.
- 300-lb. (136.1 kg) weight capacity.

Medium Duty Carts...

- 20-gauge stainless steel shelves.
- 16-gauge stainless steel angle legs.
- 500-lb. (226.8 kg) weight capacity.

Certifications / Approvals



AutoQuotes







Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____


Stainless Steel Utility Carts

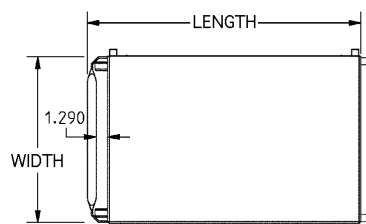


TOP VIEW

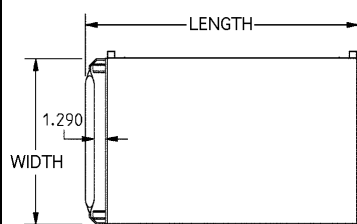

TOP VIEW




FRONT VIEW




END VIEW

(CART WITH STANDARD UPTURNS SHOWN)



FRONT VIEW



END VIEW

(CART WITH UPTURNS ON ALL SIDES OF ALL SHELVES SHOWN)

Standard Duty Carts

300-lb. weight capacity.

| overall width x length x height | | shelf width x length (inner dimensions) | | shelf clearance | | weight | | with * Standard Upturns | with Upturn on all sides of all shelves |
|---|-----------------|--|-----------|--------------------|-----|--------|------|-------------------------------|---|
| in. | mm | in. | mm | in. | mm | lbs. | kg | model # | model # |
| 16 $\frac{1}{2}$ " x 27 $\frac{1}{2}$ " x 32" | 426 x 702 x 813 | 16 $\frac{1}{2}$ " x 25 $\frac{5}{16}$ " | 419 x 643 | 12 $\frac{1}{2}$ " | 318 | 29 | 13.2 | UC-311 | UUC-311 |
| 19" x 31" x 32" | 483 x 787 x 813 | 18 $\frac{3}{4}$ " x 28 $\frac{11}{16}$ " | 476 x 729 | 12 $\frac{1}{2}$ " | 318 | 32 | 14.5 | UC-322 | UUC-322 |

* Upturn on sides and rear of top and center shelves.

Medium Duty Carts

500-lb. weight capacity.

| overall width x length x height | | shelf width x length (inner dimensions) | | shelf clearance | | weight | | with * Standard Upturns | with Upturn on all sides of all shelves |
|---|-----------------|--|-----------|--------------------|-----|--------|------|-------------------------------|---|
| in. | mm | in. | mm | in. | mm | lbs. | kg | model # | model # |
| 16 $\frac{1}{2}$ " x 27 $\frac{1}{2}$ " x 32" | 426 x 702 x 813 | 16 $\frac{1}{2}$ " x 25 $\frac{5}{16}$ " | 419 x 643 | 12 $\frac{1}{2}$ " | 318 | 39 | 17.6 | UC-411 | UUC-411 |
| 19" x 31" x 32" | 483 x 787 x 813 | 18 $\frac{3}{4}$ " x 28 $\frac{11}{16}$ " | 476 x 729 | 12 $\frac{1}{2}$ " | 318 | 42 | 19.1 | UC-422 | UUC-422 |

* Upturn on sides and rear of top and center shelves.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.

Printed in U.S.A.
 ©2018 by Eagle Group

Rev. 09/18



METRO® SEAL 3


with Microban® Antimicrobial Protection

Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

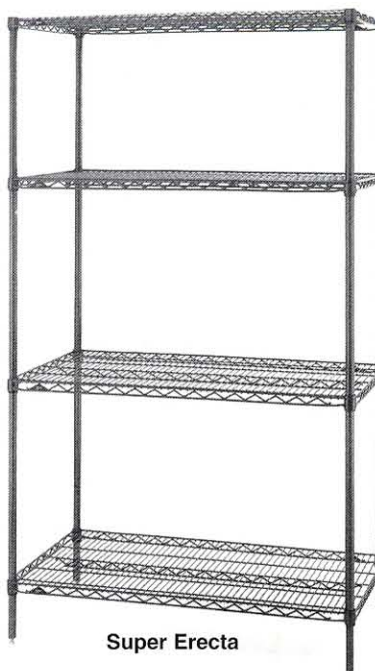

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.

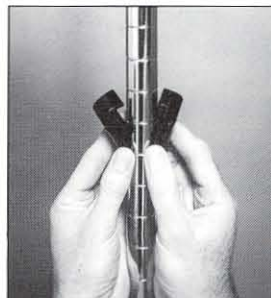

Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

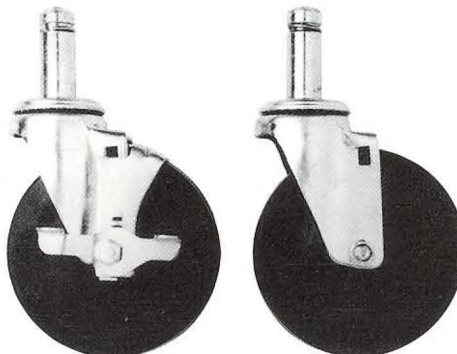

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

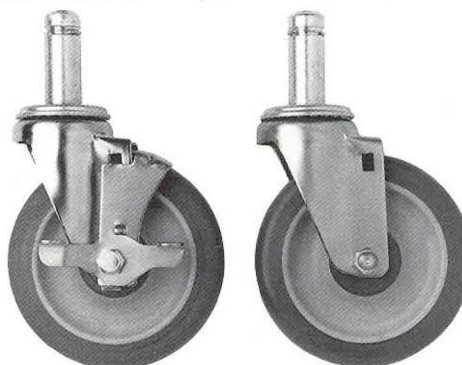

5MDBGSA

5MDGSA

Polymer Horn Casters

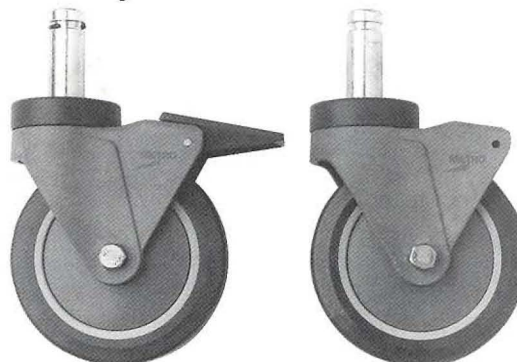

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: Load Height for 4LD caster — $4\frac{5}{8}'' \pm \frac{1}{16}''$ ($118 \pm 1.5\text{mm}$).

NOTE 5: Load Height for 5LD caster — $5\frac{5}{8}'' \pm \frac{1}{16}''$ ($143 \pm 1.5\text{mm}$).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided**.

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.



We put space to work.

Item # _____


Job _____

WIRE SHELVING ACCESSORIES

Color Shelf Marker

Color code for effective organization. Snaps securely to the front edge of Super Erecta and Super Adjustable Super Erecta Wire Shelving.

| Model No. | Shelf Marker Size (in.) (mm) | | Color |
|-----------|---------------------------------|--------|--------|
| CSM6-B | 6x1 ¹ / ₄ | 152x32 | Blue |
| CSM6-G | 6x1 ¹ / ₄ | 152x32 | Green |
| CSM6-R | 6x1 ¹ / ₄ | 152x32 | Red |
| CSM6-T | 6x1 ¹ / ₄ | 152x32 | Tan |
| CSM6-W | 6x1 ¹ / ₄ | 152x32 | White |
| CSM6-Y | 6x1 ¹ / ₄ | 152x32 | Yellow |
| CSM6-GR | 6x1 ¹ / ₄ | 152x32 | Gray |



Color Shelf Markers

Label Holders

It's easy to identify shelf contents with these snap-on plastic holders, available in four styles and a variety of sizes. Labels not included.

1¹/₄" (32mm) Label Holders

Gray. Holds most commercial labels. Available in a variety of lengths.

| Model No. | Label Size (in.) (mm) | | Fits Shelf Length (in.) (mm) | |
|-----------|----------------------------------|---------|---------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) |
| 9990P | 3x1 ¹ / ₄ | 75x32 | All | |
| 9990P1 | 13x1 ¹ / ₄ | 330x32 | 18 | 457 |
| 9990P2 | 19x1 ¹ / ₄ | 480x32 | 24 | 610 |
| 9990P30 | 25x1 ¹ / ₄ | 635x32 | 30 | 760 |
| 9990P3 | 31x1 ¹ / ₄ | 725x32 | 36 | 914 |
| 9990P4 | 43x1 ¹ / ₄ | 1090x32 | 48 | 1219 |
| 9990P5 | 55x1 ¹ / ₄ | 1395x32 | 60 | 1520 |



1¹/₄" (32mm) Label Holder

Clear Label Holders

Clear plastic allows decorator colors to show through. Holds most commercial 1¹/₄" (32mm) labels.

| Model No. | Label Size (in.) (mm) | | Fits Shelf Length (in.) (mm) | |
|-----------|----------------------------------|---------|---------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) |
| 9990CL | 3x1 ¹ / ₄ | 75x32 | All | |
| 9990CL1 | 13x1 ¹ / ₄ | 330x32 | 18 | 457 |
| 9990CL2 | 19x1 ¹ / ₄ | 480x32 | 24 | 610 |
| 9990CL30 | 25x1 ¹ / ₄ | 635x32 | 30 | 760 |
| 9990CL3 | 31x1 ¹ / ₄ | 725x32 | 36 | 914 |
| 9990CL4 | 43x1 ¹ / ₄ | 1090x32 | 48 | 1219 |
| 9990CL5 | 55x1 ¹ / ₄ | 1395x32 | 60 | 1520 |



Clear Label Holder

Slanted Label Holders

Gray solid plastic holder puts 1¹/₄" (32mm) labels on slant for easier viewing.

| Model No. | Label Size (in.) (mm) | | Fits Shelf Length (in.) (mm) | |
|-----------|----------------------------------|---------|---------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) |
| 9990SL | 3x1 ¹ / ₄ | 75x32 | All | |
| 9990SL1 | 13x1 ¹ / ₄ | 330x32 | 18 | 457 |
| 9990SL2 | 19x1 ¹ / ₄ | 480x32 | 24 | 610 |
| 9990SL30 | 25x1 ¹ / ₄ | 635x32 | 30 | 760 |
| 9990SL3 | 31x1 ¹ / ₄ | 725x32 | 36 | 914 |
| 9990SL4 | 43x1 ¹ / ₄ | 1090x32 | 48 | 1219 |
| 9990SL5 | 55x1 ¹ / ₄ | 1395x32 | 60 | 1520 |



Slanted Label Holder

Material specifications

- Color Shelf Markers, 1¹/₄" High Gray Label Holders, Slanted Label Holders — Rigid PVC; suitable for continuous use in a temperature range of -20° to 165°F (-28° to 73°C)
- Clear Label Holders — CAB plastic; suitable for continuous use in a temperature range of -20° to 120°F (-28° to 49°C)
- Label holders are not cart washable or autoclavable.

Notes for Shelf Markers and Label Holders:

- If ledges are desired on the front of the shelf where the label holder is most often attached, the label holder or color shelf marker must be mounted between the vertical support wires of the ledge.
- Label holders work with standard wire shelving styles — Super Erecta, Super Adjustable, qwikSLOT, Drop Mat wire shelving, cantilever shelves.
- Designed for use with 1" (25mm) high labels.



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: www.metro.com/contactus

L02-008
Printed in U.S.A. Rev. 12/19

Information and specifications are subject to change without notice. Please confirm at time of order

Copyright © 2019 InterMetro Industries Corp.






Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

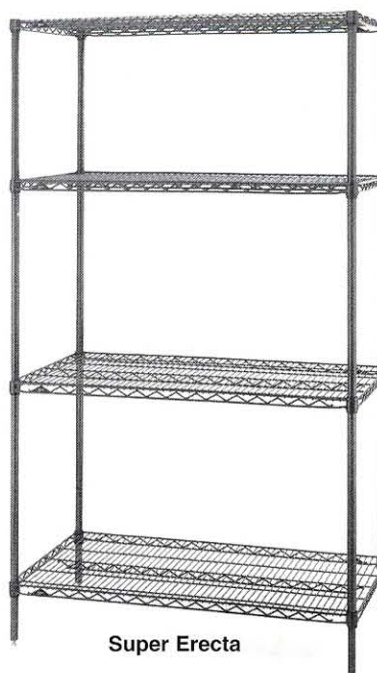

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.



Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

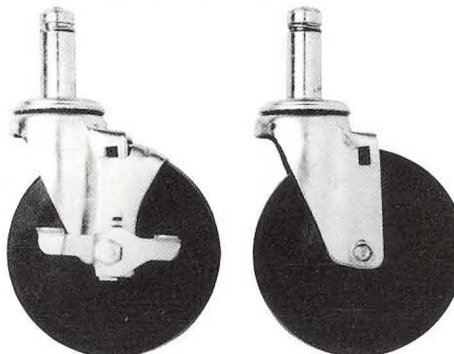

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

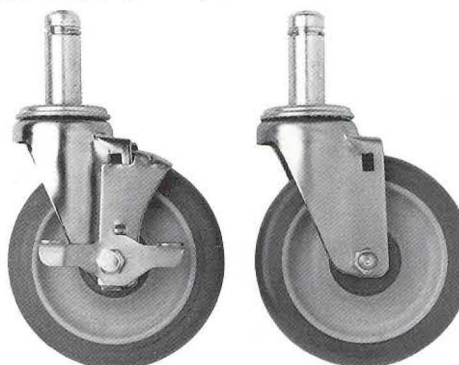

5MDBGSA

5MDGSA

Polymer Horn Casters

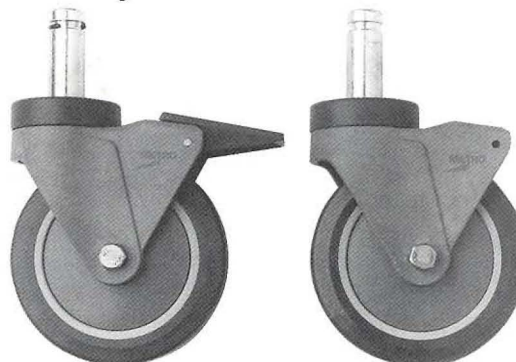

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge.**

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known.**

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — 6 7/32" ± 1/16" (155 ± 1.5mm).

NOTE 4: Load Height for 4LD caster — 4 5/8" ± 1/16" (118 ± 1.5mm).

NOTE 5: Load Height for 5LD caster — 5 5/8" ± 1/16" (143 ± 1.5mm).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge.**

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known.**

NOTE 3: Load Height for all 5MD and 5MP casters — 6 7/32" ± 1/16" (155 ± 1.5mm).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge.**

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided.**

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.



We put space to work.

Item # _____


Job _____

WIRE SHELVING ACCESSORIES

Color Shelf Marker

Color code for effective organization. Snaps securely to the front edge of Super Erecta and Super Adjustable Super Erecta Wire Shelving.

| Model No. | Shelf Marker Size (in.) (mm) | | Color |
|-----------|---------------------------------|--------|--------|
| CSM6-B | 6x1 ¹ / ₄ | 152x32 | Blue |
| CSM6-G | 6x1 ¹ / ₄ | 152x32 | Green |
| CSM6-R | 6x1 ¹ / ₄ | 152x32 | Red |
| CSM6-T | 6x1 ¹ / ₄ | 152x32 | Tan |
| CSM6-W | 6x1 ¹ / ₄ | 152x32 | White |
| CSM6-Y | 6x1 ¹ / ₄ | 152x32 | Yellow |
| CSM6-GR | 6x1 ¹ / ₄ | 152x32 | Gray |



Color Shelf Markers

Label Holders

It's easy to identify shelf contents with these snap-on plastic holders, available in four styles and a variety of sizes. Labels not included.

1¹/₄" (32mm) Label Holders

Gray. Holds most commercial labels. Available in a variety of lengths.

| Model No. | Label Size (in.) (mm) | | Fits Shelf Length (in.) (mm) | |
|-----------|----------------------------------|---------|---------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) |
| 9990P | 3x1 ¹ / ₄ | 75x32 | All | |
| 9990P1 | 13x1 ¹ / ₄ | 330x32 | 18 | 457 |
| 9990P2 | 19x1 ¹ / ₄ | 480x32 | 24 | 610 |
| 9990P30 | 25x1 ¹ / ₄ | 635x32 | 30 | 760 |
| 9990P3 | 31x1 ¹ / ₄ | 725x32 | 36 | 914 |
| 9990P4 | 43x1 ¹ / ₄ | 1090x32 | 48 | 1219 |
| 9990P5 | 55x1 ¹ / ₄ | 1395x32 | 60 | 1520 |



1¹/₄" (32mm) Label Holder

Clear Label Holders

Clear plastic allows decorator colors to show through. Holds most commercial 1¹/₄" (32mm) labels.

| Model No. | Label Size (in.) (mm) | | Fits Shelf Length (in.) (mm) | |
|-----------|----------------------------------|---------|---------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) |
| 9990CL | 3x1 ¹ / ₄ | 75x32 | All | |
| 9990CL1 | 13x1 ¹ / ₄ | 330x32 | 18 | 457 |
| 9990CL2 | 19x1 ¹ / ₄ | 480x32 | 24 | 610 |
| 9990CL30 | 25x1 ¹ / ₄ | 635x32 | 30 | 760 |
| 9990CL3 | 31x1 ¹ / ₄ | 725x32 | 36 | 914 |
| 9990CL4 | 43x1 ¹ / ₄ | 1090x32 | 48 | 1219 |
| 9990CL5 | 55x1 ¹ / ₄ | 1395x32 | 60 | 1520 |



Clear Label Holder

Slanted Label Holders

Gray solid plastic holder puts 1¹/₄" (32mm) labels on slant for easier viewing.

| Model No. | Label Size (in.) (mm) | | Fits Shelf Length (in.) (mm) | |
|-----------|----------------------------------|---------|---------------------------------|------|
| | (in.) | (mm) | (in.) | (mm) |
| 9990SL | 3x1 ¹ / ₄ | 75x32 | All | |
| 9990SL1 | 13x1 ¹ / ₄ | 330x32 | 18 | 457 |
| 9990SL2 | 19x1 ¹ / ₄ | 480x32 | 24 | 610 |
| 9990SL30 | 25x1 ¹ / ₄ | 635x32 | 30 | 760 |
| 9990SL3 | 31x1 ¹ / ₄ | 725x32 | 36 | 914 |
| 9990SL4 | 43x1 ¹ / ₄ | 1090x32 | 48 | 1219 |
| 9990SL5 | 55x1 ¹ / ₄ | 1395x32 | 60 | 1520 |



Slanted Label Holder

Material specifications

- Color Shelf Markers, 1¹/₄" High Gray Label Holders, Slanted Label Holders — Rigid PVC; suitable for continuous use in a temperature range of -20° to 165°F (-28° to 73°C)
- Clear Label Holders — CAB plastic; suitable for continuous use in a temperature range of -20° to 120°F (-28° to 49°C)
- Label holders are not cart washable or autoclavable.

Notes for Shelf Markers and Label Holders:

- If ledges are desired on the front of the shelf where the label holder is most often attached, the label holder or color shelf marker must be mounted between the vertical support wires of the ledge.
- Label holders work with standard wire shelving styles — Super Erecta, Super Adjustable, qwikSLOT, Drop Mat wire shelving, cantilever shelves.
- Designed for use with 1" (25mm) high labels.



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Product Information. U.S. and Canada: 1.800.992.1776

Outside U.S. and Canada: www.metro.com/contactus

L02-008
Printed in U.S.A. Rev. 12/19

Information and specifications are subject to change without notice. Please confirm at time of order

Copyright © 2019 InterMetro Industries Corp.





T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

Model No.

B-0231

Item No.

126a



ADA Compliant

This Space for Architect/Engineer Approval





Job Name _____ Date _____

Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____

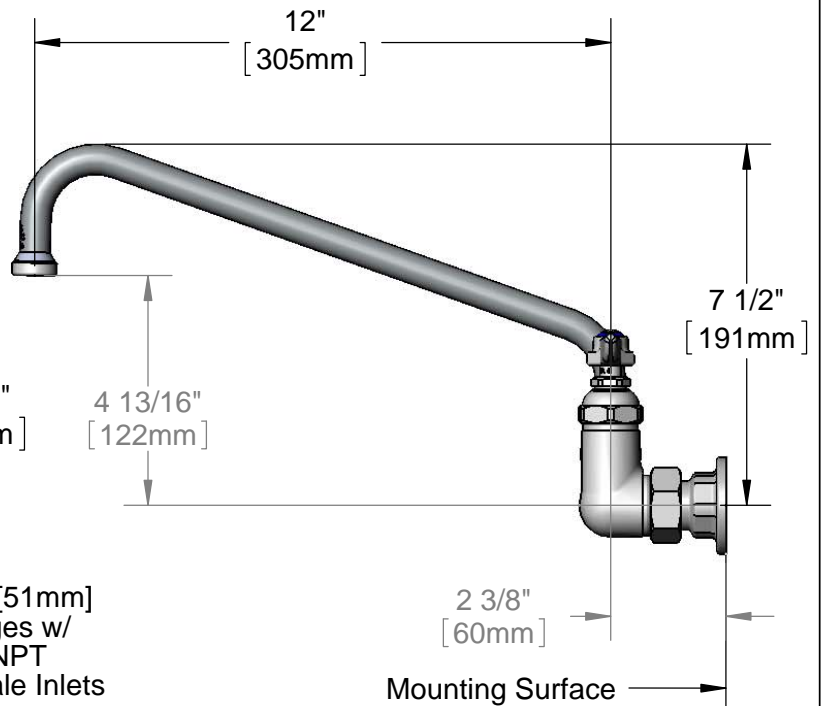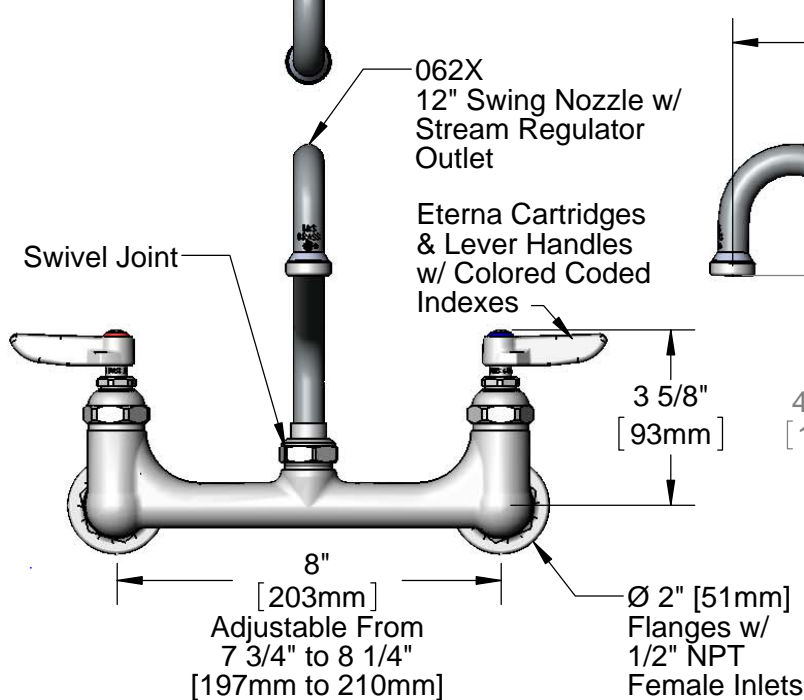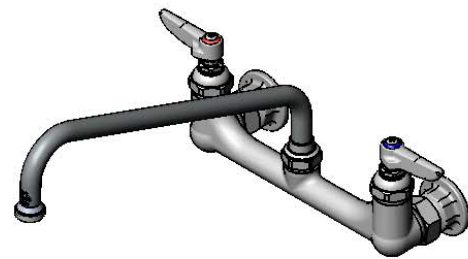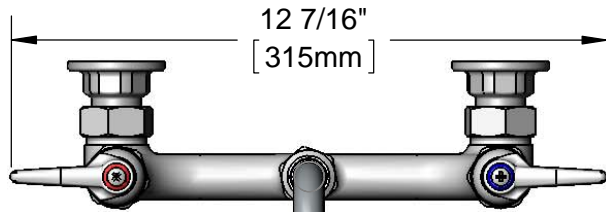

Product Specifications:

8" Wall Mount Mixing Faucet w/ Eterna Cartridges, Lever Handles,
12" Swing Nozzle & 1/2" NPT Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690


Model No.

B-0231

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

| ITEM NO. | SALES NO. | DESCRIPTION |
|----------|-----------|--|
| 1 | 062X | 12" Swing Nozzle |
| 2 | 001048-45 | Nozzle Tip Washer |
| 3 | B-PT | Stream Regulator Outlet |
| 4 | 001661-45 | Red Index-HW |
| 5 | 005960-40 | Eterna Cartridge, RTC |
| 6 | 009538-45 | Swivel Washer |
| 7 | 011429-45 | Swivel Sleeves (2) |
| 8 | 001074-45 | O-Ring |
| 9 | 000922-45 | Lever Handle Screw |
| 10 | 001660-45 | Blue Index-CW |
| 11 | 001638-45 | Lever Handle |
| 12 | 005959-40 | Eterna Cartridge, LTC |
| 13 | 00AA | 1/2" NPT Female Eccentric Flange |
| 14 | 001019-45 | Coupling Nut Washer |
| 15 | 002713-40 | Eterna Cartridge, LTC w/ Handle, Index & Screw |
| 16 | 002714-40 | Eterna Cartridge, RTC w/ Handle, Index & Screw |

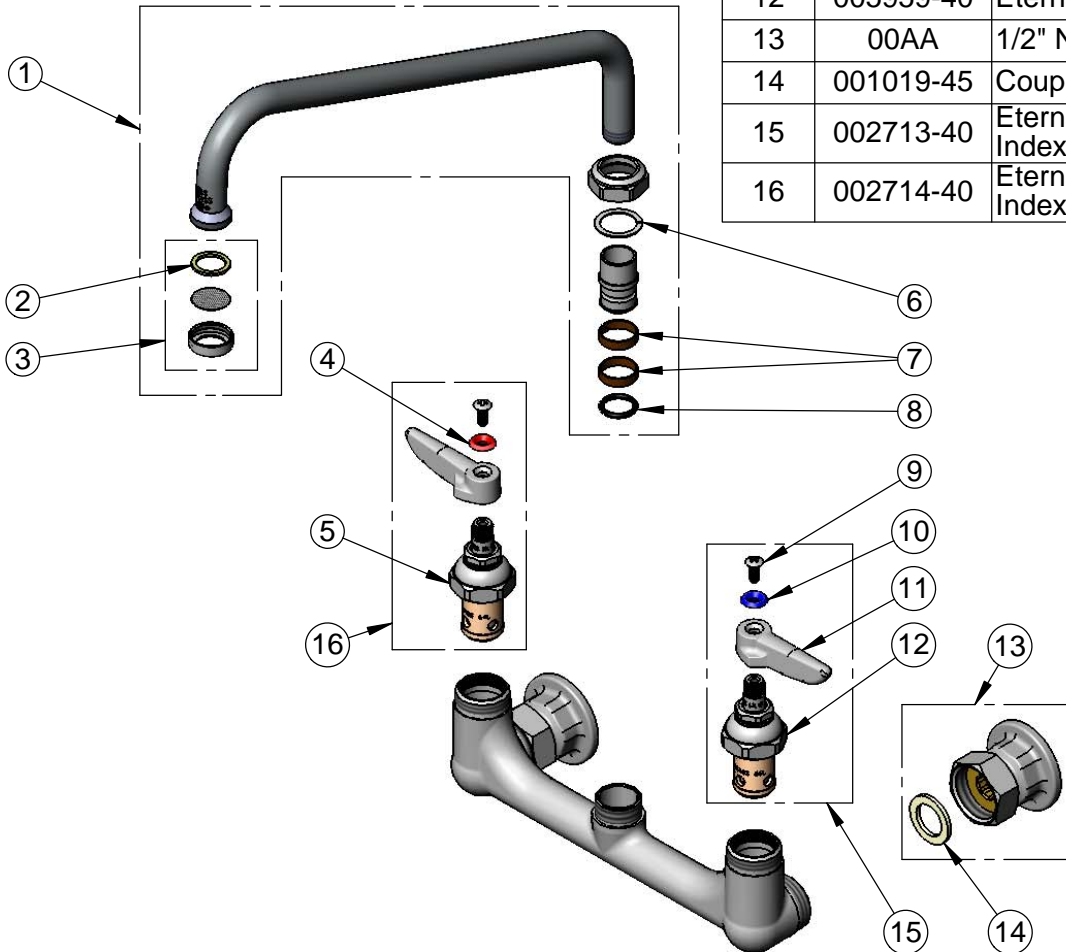

Product Specifications:

8" Wall Mount Mixing Faucet w/ Eterna Cartridges, Lever Handles,
12" Swing Nozzle & 1/2" NPT Female Inlets

Product Compliance:


ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)

TAFCO Walk-In Coolers & Freezers




Standard Design Features


- Every panel constructed of four-inch thick foamed-in-place urethane insulation
- Easy installation with lightweight modular panels and TMP's "surelock" positive camlock device — assuring instant panel alignment
- Easy to relocate or enlarge
- Choice of:
 - stucco aluminum
 - white stucco aluminum
 - galvalume
 - smooth white aluminum
 - special metals available upon request
- Hundreds of available sizes allowing flexibility of design
- NSF and UL listed
- Wide variety of refrigeration packages assuring the perfect match for your refrigeration needs
- Flush fitting, condensation-free door
- Pressure relief vent is standard on all freezer applications
- Camlift, self-closing door with magnetic door gasket and door closer.
- Vapor proof interior light
- Exterior dial thermometer
- Tongue and groove panels with foamed-in-place gaskets
- Reinforced stainless steel door sills



Corner panel
Nominal 1' x 1' 90 angle NSF-approved corner panels are completely interchangeable.



NSF-approved T panel
Nominal 11½" and 23" T panels combined with tongue and groove partition panels prevent conduction between compartments by providing a complete break in metal continuity. The need for breaker strips and heater wires eliminated.

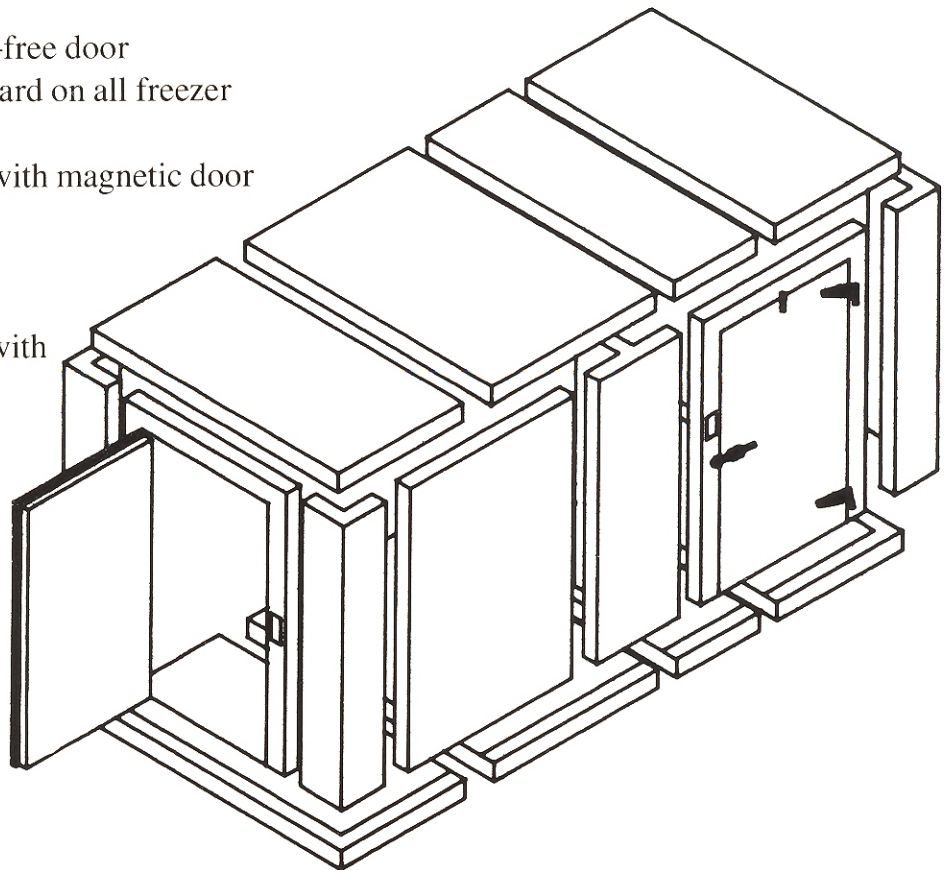

MINI-PAK REMOTE AIR-COOLED REFRIGERATION SYSTEM FOR OUTDOOR APPLICATIONS

UNC Crown Co

128

SYSTEM WEIGHT 697 #
COIL WEIGHT 162 #

UNC Crown Commons
Chappel Hill, NC
20-0957 Rev 2

SYSTEM MODEL NUMBER - **MPL-2CZ**

POWER SUPPLY **208-230V/60HZ/3PH**

FUSE SIZE **35** AMPS

SYSTEM ITEM NUMBER - **103**

CONNECTED LOAD 26.8 AMPS

SYSTEM DIMENSIONS - 72" L x 36" W x 37" H

MINIMUM CIRCUIT AMPACITY 29.0 AMPS

VERIFY WITH
JOB SITE
CONDITIONS

| SYSTEM | FIXTURES | | | COMPRESSORS | | | | | | COLDZONE EVAPORATOR COILS | | | | | | SYSTEM AMPS | CONDITIONS | | | TIME CLOCK | | |
|--------|--------------------|----------------------|--------------|-------------|-------------|---------|------------|----------|-----------|---------------------------|--------------|----------|--------------|------------|--------------|----------------|------------|--------------|---------|---------------|-----------|--------|
| | ITEM NUMBER | DESCRIPTION | TEMP. | | REFRIGERANT | MODEL | HORSEPOWER | AMPERAGE | VOLT / PH | CAPACITY | DEFROST TYPE | QUANTITY | MODEL | FAN MOTORS | | | DEFROST | | SUCTION | | DISCHARGE | LIQUID |
| | | | FIXTURE E | SUCT ION | | | | | | | | | | AMP E | VOLT / PH | | AMP E | VOLT / PH | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| A | 127 | W/I FREEZER | -10 | -20 | R-448A | ZF09K4E | 3.0 | 8.7 | 208/3 | 9.5 | E | 1 | CL6E077DDARE | 1.0 | 208/1 | 9.8 | 208/1 | 8.7 | 1 1/8 | | 3/8 | ECONET |
| B | - | W/I COOLER | 35 | 25 | R-448A | ZB07KAE | 1.0 | 4.7 | 208/3 | 8.3 | T | 1 | CL6A073ADARE | 1.6 | 115/1 | | | 4.7 | 5/8 | | 3/8 | ECONET |
| C | - | W/I COOLER | 35 | 25 | R-448A | ZB08KAE | 1.2 | 4.7 | 208/3 | 9.7 | T | 1 | CL6A094ADARE | 1.6 | 115/1 | | | 4.7 | 7/8 | | 3/8 | ECONET |
| | (2) | CONDENSER FAN MOTORS | | | | | 3/4 | 3.4 | 208/3 | | | | | | | | | 6.8 | | | | |

E = ELECTRIC DEFROST
T = AIR DEFROST
E^ = TIME CLOCK BY FIXTURE MANUFACTURER

ALL EVAPORATOR COILS WILL REQUIRE POWER FROM A HOUSE CIRCUIT
EVAPORATOR FAN MOTORS PROVIDED WITH HIGH EFFICIENCY **EC MOTORS**
ALL COMPRESSORS AND CONDENSER CIRCUITS ARE SIZED TO OPERATE AT **95° F AMBIENT**
EACH COMPRESSOR SYSTEM IS SUPPLIED WITH A CRANKCASE HEATER AND HEADPRESSURE CONTROL
LOW TEMPERATURE SYSTEMS ARE SUPPLIED WITH **SUCTION LINE ACCUMULATOR**
REFRIGERATION SYSTEM INCLUDES A **MAIN-FUSED DISCONNECT SWITCH**
REFRIGERATION PIPE SIZES ARE BASED ON A MAXIMUM LINE RUN OF 150 EQUIVALENT FEET



Item # _____

Job _____

TOP-TRACK™ HIGH-DENSITY STORAGE SYSTEMS

for Super Erecta® and
Super Adjustable Super Erecta® Systems

- *Reduce Inventory Costs*
- *Increase Revenues*
- *Maximize Storage Capacity*
- *Increase Productivity*
- *Simplify Operations*
- *Cleaner Between Cleanings*



- **Maximizes Storage Capacity:** Top-Track can increase the storage capacity of a given area by 30% to 40%. Mobile units are used between stationary units. Only one aisle, which can be opened between any two units as needed, is required. The Top-Track Storage system utilizes far less aisle space and maximizes the usable storage area.
- **Cost-Saving Performance:** This efficient utilization of space addresses the storage needs of new or growing operations. In a new facility, less square footage would have to be dedicated to storage. In growing operations, Top-Track can eliminate the need to expand the facility to handle increasing storage requirements, greatly reducing the costs associated with a growing business's needs.
- **Improved Organization and Inventory Control:** Top-Track allows better organization of stored goods and permits improved inventory control with one-stop delivery and pick-up.
- **Increased Productivity:** With reduced square footage dedicated to storage, Top-Track maximizes the amount of productive "front of the house" space available, increasing daily revenues.
- **Accessible:** The overhead track system guides the mobile units and opens an access aisle between any two units, whenever it is needed. The open access promotes cleanliness and easy access for walking or for utility carts, simplifying the material handling task.
- **Super Erecta/Super Erecta Super Adjustable:** Super Erecta and Super Adjustable shelves are available in a variety of widths and lengths. Each system features ease of assembly, promotes air circulation, promotes light penetration and shelf level adjustability. Super Adjustable features shelf corners with a quick release lever. Shelves can be rapidly adjusted, without the use of tools, to meet changing storage needs. Shelves are available in Brite™, chrome, Metroseal 3 with *Microban® built-in product protection and stainless steel.

*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com




Top-Track™ High-Density Storage Systems

11.12




TOP-TRACK™ HIGH-DENSITY STORAGE SYSTEMS

FRONT VIEW

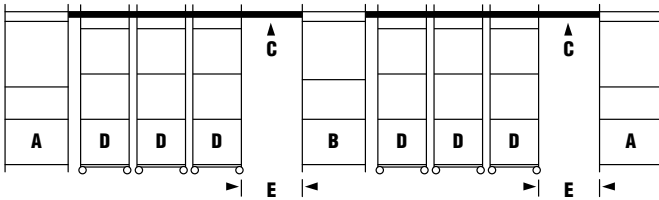

OVERHEAD VIEW

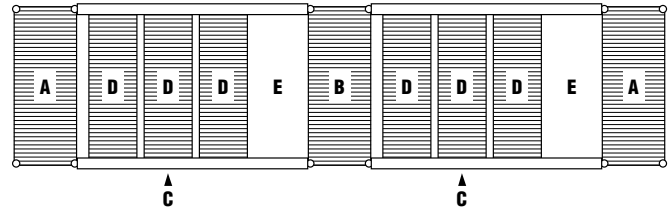

System Components

- A** = Stationary End Units
B = Stationary Intermediate Unit (Optional)
C = Track Set
D = Mobile Units
E = Open Aisle

Dimensions

Stationary End Unit Kits

| | Cat. No. Chrome-Plated | Cat. No. Metroseal 3 | Cat. No. Stainless Steel | Shelf Width (in.) (mm) | |
|---|---------------------------|-------------------------|-----------------------------|---------------------------|-----|
| Includes hardware necessary for connecting stationary end units to track. ONE KIT IS REQUIRED PER SINGLE SYSTEM. SHELVES SOLD SEPARATELY. 86" (2185mm) posts included. Just add shelves. | TTE18C | TTE18K3 | TTE18S | 18 | 457 |
| | TTE21C | TTE21K3 | TTE21S | 21 | 530 |
| | TTE24C | TTE24K3 | TTE24S | 24 | 610 |

Stationary Intermediate Unit Kits

| | Cat. No. Chrome-Plated | Cat. No. Metroseal 3 | Cat. No. Stainless Steel | Shelf Width (in.) (mm) | |
|--|---------------------------|-------------------------|-----------------------------|---------------------------|-----|
| Includes hardware necessary for connecting intermediate unit to track on both sides. ONE KIT IS REQUIRED PER SINGLE SYSTEM. SHELVES SOLD SEPARATELY. 86" (2185mm) posts included. Just add shelves. | TTA18C | TTA18K3 | TTA18S | 18 | 457 |
| | TTA21C | TTA21K3 | TTA21S | 21 | 530 |
| | TTA24C | TTA24K3 | TTA24S | 24 | 610 |

Track Sets

| | 6' (1830mm) | 7' (2135mm) | 8' (2440mm) | 9' (2745mm) | 10' (3050mm) | 11' (3355mm) | 12' (3660mm) | 13' (3965mm) |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Includes necessary sections of track for assembling track runs of 6'-21' (1830mm-6405mm). | TTS6NA | TTS7NA | TTS8NA | TTS9NA | TTS10NA | TTS11NA | TTS12NA | TTS13NA |
| | 14' (4270mm) | 15' (4575mm) | 16' (4880mm) | 17' (5185mm) | 18' (5490mm) | 19' (5795mm) | 20' (6100mm) | 21' (6405mm) |
| | TTS14NA | TTS15NA | TTS16NA | TTS17NA | TTS18NA | TTS19NA | TTS20NA | TTS21NA |

Mobile Unit Kits

| | Cat. No. Chrome-Plated | Cat. No. Metroseal 3 | Cat. No. Stainless Steel | Shelf Width (in.) (mm) | |
|---|---------------------------|-------------------------|-----------------------------|---------------------------|-----|
| One kit required per mobile unit. Kit includes posts, casters/caster channels, donut bumpers, roller bearing assemblies, hardware, and split sleeves. SHELVES SOLD SEPARATELY. Just add shelves. | TTM18C | TTM18K3 | TTM18S | 18 | 457 |
| | TTM21C | TTM21K3 | TTM21S | 21 | 530 |
| | TTM24C | TTM24K3 | TTM24S | 24 | 610 |


NOTES:

- The stationary end and intermediate units **must** have a minimum of four shelves.
- The standard Top-Track™ system requires the use of 86" (2185mm) posts (i.e., 86PK3 or 86PS) on the stationary end and intermediate units. **Shelves for the stationary end and intermediate units are sold separately.**
- The mobile unit kits includes special 74" (1880mm) posts with casters. **Shelves for mobile units are sold separately.**
- Recommended maximum load rating for a mobile unit is 900 lbs. (400kg). Floor should be level, smooth, and free from large cracks and raised obstacles.
- Under normal conditions, an aisle width of 30"-36" (762-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
- A stationary intermediate unit is required when track length exceeds 21 feet (6401mm). A stationary intermediate unit may be used at the discretion of the user when track lengths are less than 21 feet (6401mm).


TOP-TRACK™ HIGH-DENSITY STORAGE SYSTEMS



FRONT VIEW

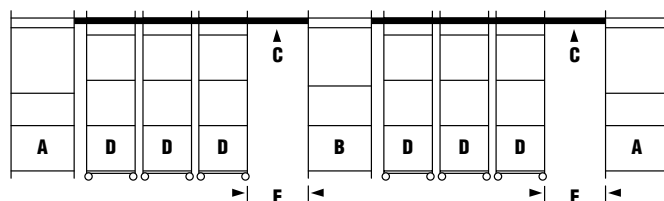


OVERHEAD VIEW

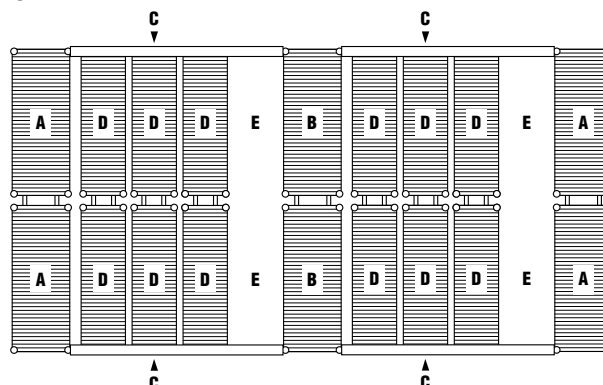

System Components

- A = Stationary End Units
- B = Stationary Intermediate Unit (Optional)
- C = Track Set
- D = Mobile Units
- E = Open Aisle



Close-up showing shelving units connected end-to-end in two Top-Track™ systems

Dimensions

Stationary End Unit Kits

Includes hardware necessary for connecting stationary end units in Double Deep systems and connecting to an overhead track set. **ONE KIT IS REQUIRED FOR ENTIRE DOUBLE DEEP CONFIGURATION. SHELVES SOLD SEPARATELY.** 86" (2185mm) posts included. Just add shelves.

| Cat. No. Chrome-Plated | Shelf Width (in.) (mm) | |
|---------------------------|---------------------------|-----|
| LTTE18C | 18 | 457 |
| LTTE21C | 21 | 530 |
| LTTE24C | 24 | 610 |

Stationary Intermediate Unit Kits

Includes hardware necessary for connecting intermediate stationary end units in Double Deep systems and connecting to an overhead track set on each side. **ONE KIT IS REQUIRED FOR ENTIRE DOUBLE DEEP CONFIGURATION. SHELVES SOLD SEPARATELY.** 86" (2185mm) posts included. Just add shelves.

| Cat. No. Chrome-Plated | Shelf Width (in.) (mm) | |
|---------------------------|---------------------------|-----|
| LTTA18C | 18 | 457 |
| LTTA21C | 21 | 530 |
| LTTA24C | 24 | 610 |

Track Sets

Includes necessary sections of track for assembling track runs of 6' to 21' (763-6405mm). **ONLY ONE TRACK SET IS REQUIRED BETWEEN STATIONARY UNITS.**

| 6' (1830mm) | 7' (2135mm) | 8' (2440mm) | 9' (2745mm) | 10' (3050mm) | 11' (3355mm) | 12' (3660mm) | 13' (3965mm) |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| TTS6NA | TTS7NA | TTS8NA | TTS9NA | TTS10NA | TTS11NA | TTS12NA | TTS13NA |
| 14' (4270mm) | 15' (4575mm) | 16' (4880mm) | 17' (5185mm) | 18' (5490mm) | 19' (5795mm) | 20' (6100mm) | 21' (6405mm) |
| TTS14NA | TTS15NA | TTS16NA | TTS17NA | TTS18NA | TTS19NA | TTS20NA | TTS21NA |

Mobile Unit Kits

Includes the necessary posts, casters, caster channels, donut bumpers, roller bearing assemblies, and tie-together hardware to connect two mobile units together (i.e., one in each system). **SHELVES SOLD SEPARATELY.** Just add shelves.

| Cat. No. Chrome-Plated | Shelf Width (in.) (mm) | |
|---------------------------|---------------------------|-----|
| LTTM18C | 18 | 457 |
| LTTM21C | 21 | 530 |
| LTTM24C | 24 | 610 |

NOTES:

- The stationary end and intermediate units **must** have a minimum of four shelves. **For all Super Adjustable applications, the top and bottom shelves are to be non "quick adjust" Super Erecta shelves.**
- The standard Double Deep Top-Track™ system requires the use of 86" (2185mm) posts (i.e., 86P) on the stationary end and intermediate units. **Shelves for the stationary end and intermediate units are sold separately.**
- The mobile unit kit includes special 74" (1880mm) posts with casters. **Shelves for mobile units are sold separately.** For all Super Adjustable applications, the top and bottom shelves are to be non "quick adjust" Super Erecta shelves.
- Under normal conditions, an aisle width of 30"-36" (762mm-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
- Two intermediate shelving units connected end-to-end are required when the track length exceeds 21 feet (6401mm). Stationary intermediate shelving units may be used at the discretion of the user when track lengths are less than 21 feet (6401mm).
- The maximum Double Deep system configuration is 10'7" (3202mm) (e.g., two systems, each having 60" (1525mm) for long shelves plus 6" (152mm) for Top-Track components.)
- Ease of rollability for the mobile unit is an important consideration in evaluating Top-Track as a possible storage alternative. The floor should be level, smooth, and free from large cracks and raised obstacles. Two mobile shelving units connected end-to-end and loaded with between 800 to 1,200 lbs. (365-550kg) will require a human effort range (in lbs. of human force) of between 18-24 lbs. (8-11kg) to move the unit from a complete stop. An average person will perceive this as acceptable effort levels.
- Mobile units should have the top shelf positioned as close as possible to the track.

Job _____



TOP-TRACK™ HIGH-DENSITY STORAGE SYSTEMS

Specifications

- **Track:** Aluminum extrusion 6063-T6.
- **Joining Channel:** 16 gauge galvanized steel.
- **Roller Assembly:** Zinc-plated steel hardware with nylon roller.
- **Casters:**
 - For applications where **Brite™** or **chrome finishes** are acceptable: 5" (127mm) wheel with offset rigid horn, ball bearings in axle, nickel-plated, pre-lubricated.
 - For applications where **Metroseal 3** and **stainless steel** are acceptable: 5" (127mm) wheel with offset stainless steel rigid horn, stainless steel ball bearings in axle, pre-lubricated.

Workable Configurations of Mobile Units Base on Various Track Lengths and Desired Aisle Sizes

| Length of Track | Nominal Aisle Size = 30" (760mm) | | | | Nominal Aisle Size = 33" (838mm) | | | | Nominal Aisle Size = 36" (914mm) | | | |
|-----------------|--|-------------|-------------|------------------------------|--|-------------|-------------|------------------------------|--|-------------|-------------|------------------------------|
| | No. Mobile Units (Note 1) 18" (457mm) | 21" (530mm) | 24" (610mm) | Actual Aisle Size (in.) (mm) | No. Mobile Units (Note 1) 18" (457mm) | 21" (530mm) | 24" (610mm) | Actual Aisle Size (in.) (mm) | No. Mobile Units (Note 1) 18" (457mm) | 21" (530mm) | 24" (610mm) | Actual Aisle Size (in.) (mm) |
| 6 | 2 | | | 31 1/2 800 | 2 | | | 31 1/2 800 | | | | |
| 7 | | | 2 | 31 1/2 800 | | | 2 | 31 1/2 800 | | | 2 | 37 1/2 952 |
| 8 | 1 | 2 | | 29 1/4 749 | 2 | 1 | | 32 1/4 819 | 3 | | | 35 1/4 895 |
| 9 | | | 3 | 29 1/4 749 | | 1 | 2 | 32 1/4 819 | 1 | | 2 | 35 1/4 895 |
| 10 | 2 | 1 | 1 | 30 762 | 3 | | 1 | 33 838 | 3 | 1 | | 36 914 |
| 11 | | 1 | 3 | 30 762 | | 2 | 2 | 33 838 | | 3 | 1 | 36 914 |
| 12 | 1 | 4 | | 30 3/4 781 | 2 | 3 | | 34 3/4 857 | 3 | 2 | | 36 1/4 933 |
| 13 | | 2 | 3 | 30 3/4 781 | | 3 | 2 | 34 3/4 857 | | 4 | 1 | 36 1/4 933 |
| 14 | 4 | 3 | | 31 1/2 800 | 2 | 4 | | 32 1/4 819 | 6 | 1 | | 35 1/4 895 |
| 15 | 4 | 3 | | 29 1/4 749 | 5 | 2 | | 32 1/4 819 | 6 | 1 | | 35 1/4 895 |
| 16 | 8 | | | 30 762 | 1 | 6 | | 32 1/4 819 | 2 | 5 | | 35 1/4 895 |
| 17 | 4 | 4 | | 30 762 | 5 | 3 | | 33 838 | 7 | | 1 | 36 914 |
| 18 | | 8 | | 30 762 | 1 | 7 | | 33 838 | 2 | 6 | | 36 914 |
| 19 | 2 | | 6 | 30 762 | 2 | 1 | 5 | 33 838 | 3 | | 5 | 36 914 |
| 20 | | | 8 | 30 762 | | 1 | 7 | 33 838 | | 2 | 6 | 36 914 |
| 21 | | | | | 5 | 5 | | 34 1/2 876 | 6 | 4 | | 37 1/2 952 |

NOTE 1: Actual overall width of nominal 18" (457mm), 21" (530mm), and 24" (610mm) wide mobile units is 20 1/4" (667mm). The number of mobile units here applies to individual units in a single system, and sets of units (two mobile units tied back-to-back) in a double deep system.

NOTE 2: In confined spaces, usable space for the Top-Track installation should be determined by deducting 4" (102mm) from the overall measured space. This allows for variables such as building tolerances.

Example

Selection Criteria: Actual track length required: 17'3" (5228mm). Aisle width must be in 30"-36" (762-914mm) range.

| Selection of Mobile Units | Nominal 30" (762mm) Aisle | | | Nominal 33" (838mm) Aisle | | |
|---------------------------|---------------------------|-------------|-------------|---------------------------|-------------|-------------|
| | 18" (457mm) | 21" (530mm) | 24" (610mm) | 18" (457mm) | 21" (530mm) | 24" (610mm) |
| 17' (5185mm) | 4 | 4 | | 5 | 3 | |

Other selections would produce a movable aisle outside the 30"-36" (762-914mm) range.

Beyond the standard configurations mentioned above, custom Top-Track capabilities include:

- Attaching one end of the track to a wall in a single or double deep installation.
- Tying together a cluster of two mobile units (i.e., side-to-side) in a single system, or four mobile units in a double deep system.
- A taller installation up to a maximum height of 8' (2438mm) (i.e., 86" (2185mm) high posts in the stationary end units).
- Metroseal 3 and stainless steel Top-Track components for the double deep application.
- Track assemblies 6.5', 7.5' (1956, 2261mm) in length.

Contact factory for details.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

L02-039
Printed in U.S.A. 8/03

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2003 InterMetro Industries Corp.




Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

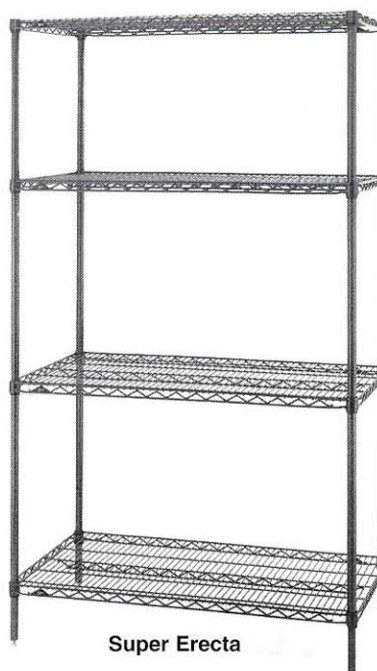

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



**SUPER ERRECTA® AND SUPER ADJUSTABLE SUPER ERRECTA®
Metroseal 3 Shelving**

10-10A

SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.

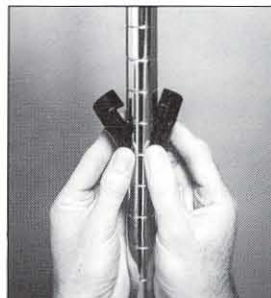

Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.




with Microban® Antimicrobial Protection

Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

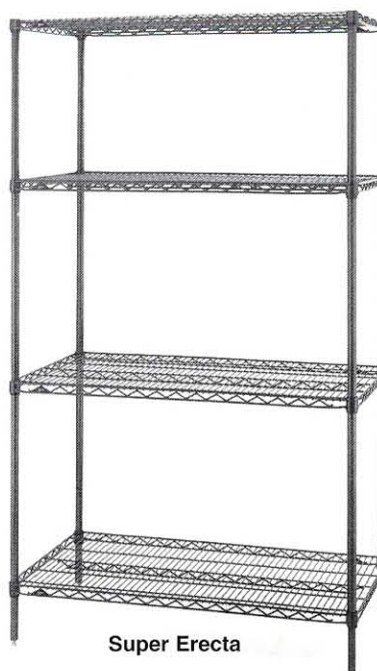

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.

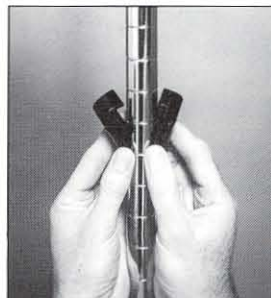

Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

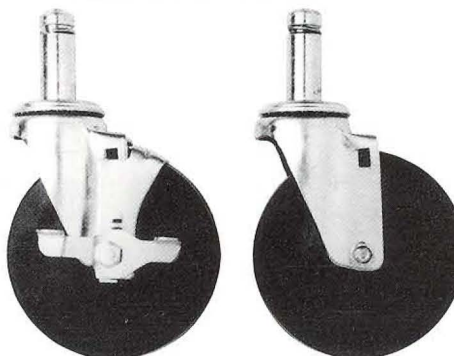

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

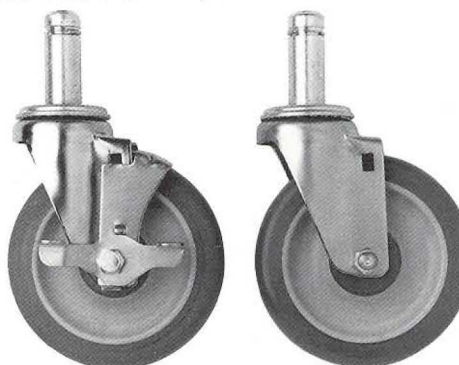

5MDBGSA

5MDGSA

Polymer Horn Casters

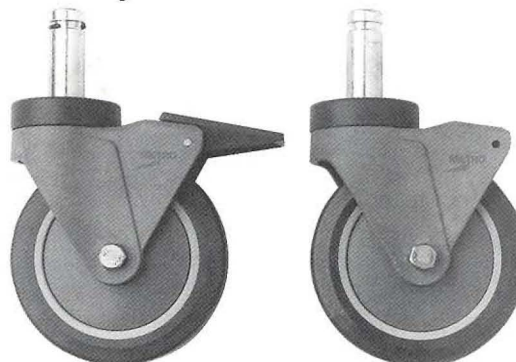

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge.**

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known.**

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: Load Height for 4LD caster — $4\frac{5}{8}'' \pm \frac{1}{16}''$ ($118 \pm 1.5\text{mm}$).

NOTE 5: Load Height for 5LD caster — $5\frac{5}{8}'' \pm \frac{1}{16}''$ ($143 \pm 1.5\text{mm}$).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge.**

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known.**

NOTE 3: Load Height for all 5MD and 5MP casters — $6\frac{7}{32}'' \pm \frac{1}{16}''$ ($155 \pm 1.5\text{mm}$).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge.**

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided.**

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

SOLID DOOR REACH-IN REFRIGERATOR

RSA-1D-S1-HC


CABINET CONSTRUCTION

- Stainless Steel Exterior
- Aluminum Interior
- Stay-Open Door Feature For Easy Product Loading
- 20 Gauge Stainless Steel Door
- Magnetic Door Switch Automatically Activates Interior LED Light
- Heavy-Duty Cylinder Locks
- Stainless Steel Interior Door Liner
- One Piece, Snap-In Magnetic Door Gaskets
- Low Profile Vertical Door Handles
- Hinged Front Shroud
- Energy Saving Thermal Breaker
- Stainless Steel Breaker Caps
- Silver Freeze Wire Shelves Per Section
- 6" High Adjustable Stainless Steel Legs
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control With Touchpoint Interface
- Expansion Valve Technology
- Manager's Lockout Feature
- Anti-Condensate Door Perimeter Heaters
- Variable Speed Compressor Technology

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature 36°F to 38°F



Please verify qualifying units by visiting:
www.energystar.gov/cfs



- ▶ 3 Year Parts & Labor Warranty Plus An Additional 4 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (Parts Only)

OPTIONS & ACCESSORIES

- Secure-Temp™ Technology
- Stainless Steel Case Back
- Stainless Steel Kick Plate
- Exterior Door Laminate
- Glass Door Models
- Door Swing Orientation (at time of order)
- **Additional Shelves**
- Heat Shield (left, right)
- Tray Slides (type A & A/C)
- 3", **6" Casters** Or 6" Seismic Legs
- FlexTemp Models Maintain Between 28°F And 38°F
- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note)


3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 6/4/20 Printed in U.S.A.

APPROVAL: _____ DATE: _____

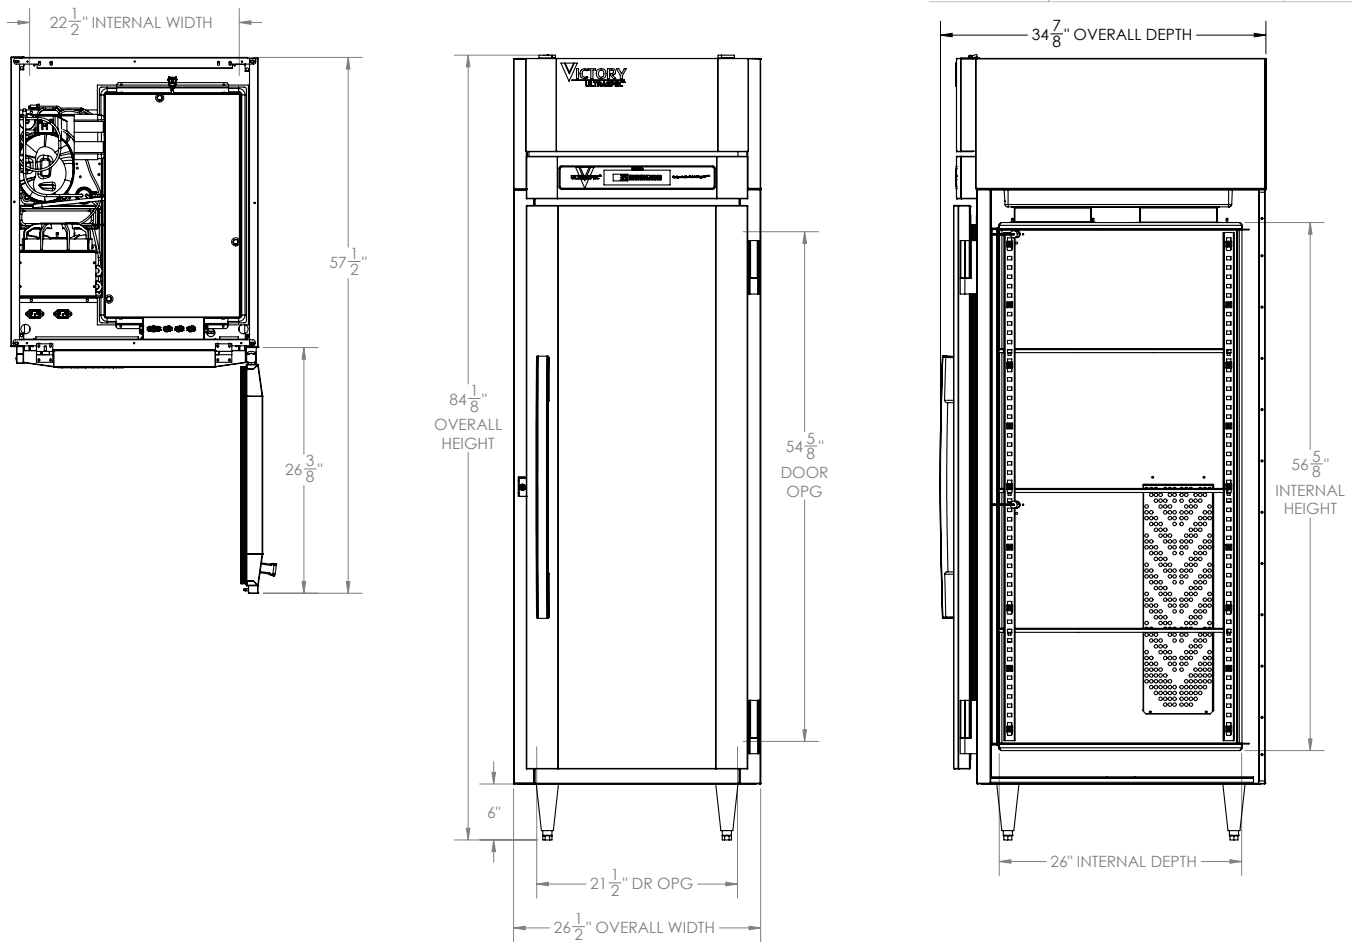

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

| CHARACTERISTICS | | ELECTRICAL DATA | | SHIPPING DETAILS | |
|------------------------------|-------------------|--------------------------------|---------------------------|--|---------|
| Net Capacity | 21.01 | Cabinet Voltage | 115/60/1 | Height | 88" |
| Width, Overall (in.) | 26 1/2" | Total Amperes | 6.5 | Width | 35" |
| Depth, Overall (with handle) | 34 7/8" | NEMA Plug* (8' cord) | 5-15P | Depth | 41" |
| Height Overall (6" legs) | 84 1/8" | REFRIGERATION DATA | | Crated Weight | 382 lbs |
| Depth, Door Open 90° | 57 1/2" | Condensing Unit Size, HP* | 1/3 | *NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order. | |
| Door Opening (in.) | 21 1/2" x 54 5/8" | Refrigerant* | R-290 | | |
| No. Of Shelves | 3 | Capacity (BTU/HR) (100°F/20°F) | Variable Speed Technology | | |

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | Fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 6/4/20 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence




Metroseal 3 is available on Super Erecta and Super Adjustable Super Erecta shelving systems. Metroseal 3 is applied using an exclusive state-of-the-art finishing and coating process that creates an attractive and corrosion-resistant finish. Metroseal 3 is enhanced with built-in Microban® antimicrobial product protection, which protects the Metroseal 3 coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation.

- **Exclusive Protection:** Metro's new proprietary epoxy coating now contains Microban® antimicrobial product protection. Microban® protects the epoxy coating from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. The storage system remains cleaner between cleanings.
- **Attractive, Corrosion-Resistant Finish:** Metroseal 3 is an attractive corrosion-resistant finish that protects the shelving against corrosive conditions found in walk-in coolers.
- **Metro® Shelving Systems:** Metroseal 3 is a finish for the world's most popular shelving systems, Super Erecta and Super Adjustable Super Erecta. Both systems provide easy assembly without the use of special tools, adjustability at 1" (25mm) increments, greater air circulation and light penetration, a large selection of accessories, and the versatility to change as your storage needs change. Super Adjustable Super Erecta has the added feature of a unique patented corner release making it the easiest to adjust shelving system ever.
- **Economical:** Metroseal 3 storage shelving is an economical alternative to stainless steel, for use in environments that tend to corrode other metals.
- **12-Year Limited Warranty:** Metroseal 3 is a corrosion-resistant finish for environments which can cause other metals to corrode. Metroseal 3 has a 12-year limited warranty against rust formation.



Super Adjustable Super Erecta

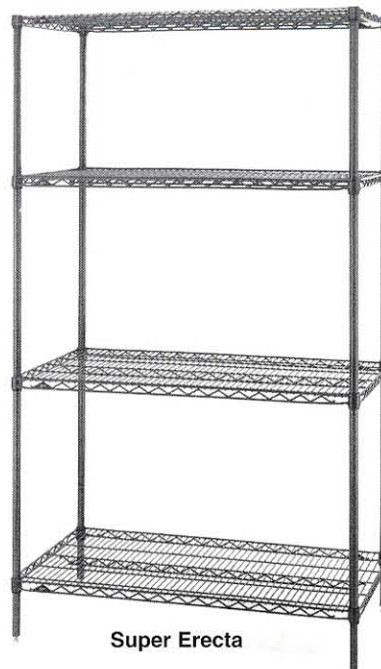

Super Erecta



*MICROBAN and the MICROBAN symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



**SUPER ERRECTA® AND SUPER ADJUSTABLE SUPER ERRECTA®
Metroseal 3 Shelving**

10-10A



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



SUPER ERECTA® AND SUPER ADJUSTABLE SUPER ERECTA® METROSEAL 3 SHELVING



Metroseal 3 Shelves


| Cat. No. Super Adjustable | Cat. No. Super Erecta | Width (in.) (mm) | Length (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|------------------------------|--------------------------|---------------------|----------------------|--------------------------------|
| A1424NK3 | 1424NK3 | 14 355 | 24 610 | 6 2.7 |
| A1430NK3 | 1430NK3 | 14 355 | 30 760 | 7 3.2 |
| A1436NK3 | 1436NK3 | 14 355 | 36 914 | 8 3.6 |
| A1442NK3 | 1442NK3 | 14 355 | 42 1066 | 9 1/2 4.3 |
| A1448NK3 | 1448NK3 | 14 355 | 48 1219 | 10 1/2 4.7 |
| A1460NK3 | 1460NK3 | 14 355 | 60 1524 | 14 6.3 |
| A1472NK3 | 1472NK3 | 14 355 | 72 1825 | 17 7.7 |
| A1824NK3 | 1824NK3 | 18 457 | 24 610 | 7 3.2 |
| A1830NK3 | 1830NK3 | 18 457 | 30 760 | 8 3.6 |
| A1836NK3 | 1836NK3 | 18 457 | 36 914 | 9 1/2 4.3 |
| A1842NK3 | 1842NK3 | 18 457 | 42 1066 | 11 5.0 |
| A1848NK3 | 1848NK3 | 18 457 | 48 1219 | 12 5.4 |
| A1854NK3 | 1854NK3 | 18 457 | 54 1370 | 14 1/2 6.6 |
| A1860NK3 | 1860NK3 | 18 457 | 60 1524 | 17 7.7 |
| A1872NK3 | 1872NK3 | 18 457 | 72 1825 | 20 9.1 |
| A2124NK3 | 2124NK3 | 21 530 | 24 610 | 8 3.6 |
| A2130NK3 | 2130NK3 | 21 530 | 30 760 | 9 4.1 |
| A2136NK3 | 2136NK3 | 21 530 | 36 914 | 11 5.0 |
| A2142NK3 | 2142NK3 | 21 530 | 42 1066 | 12 5.4 |
| A2148NK3 | 2148NK3 | 21 530 | 48 1219 | 14 6.4 |
| A2154NK3 | 2154NK3 | 21 530 | 54 1370 | 16 7.3 |
| A2160NK3 | 2160NK3 | 21 530 | 60 1524 | 18 8.2 |
| A2172NK3 | 2172NK3 | 21 530 | 72 1825 | 24 10.9 |
| A2424NK3 | 2424NK3 | 24 610 | 24 610 | 9 4.1 |
| A2430NK3 | 2430NK3 | 24 610 | 30 760 | 11 5.0 |
| A2436NK3 | 2436NK3 | 24 610 | 36 914 | 13 5.9 |
| A2442NK3 | 2442NK3 | 24 610 | 42 1066 | 15 6.8 |
| A2448NK3 | 2448NK3 | 24 610 | 48 1219 | 16 7.3 |
| A2454NK3 | 2454NK3 | 24 610 | 54 1370 | 19 8.6 |
| A2460NK3 | 2460NK3 | 24 610 | 60 1524 | 21 9.5 |
| A2472NK3 | 2472NK3 | 24 610 | 72 1825 | 26 11.8 |
| A3036NK3 | | 30 760 | 36 914 | 15 6.8 |
| A3048NK3 | | 30 760 | 48 1219 | 21 9.5 |
| A3060NK3 | | 30 760 | 60 1524 | 26 1/2 11.8 |
| A3072NK3 | | 30 760 | 72 1825 | 31 14.0 |
| A3636NK3 | | 36 914 | 36 914 | 18 8.2 |
| A3648NK3 | | 36 914 | 48 1219 | 23 10.4 |
| A3660NK3 | | 36 914 | 60 1524 | 29 13.1 |
| A3672NK3 | | 36 914 | 72 1825 | 34 1/2 15.4 |

SiteSelect™ Posts

| Cat. No. Metroseal 3 | Height* (in.) (mm) | Approx. Pkd Wt. (lbs.) (kg) |
|-------------------------|-----------------------|--------------------------------|
| 13PK3 | 14 1/2 368 | 1 0.5 |
| 33PK3 | 34 1/2 877 | 2 0.9 |
| 54PK3 | 54 9/16 1386 | 3 1.4 |
| 63PK3 | 62 9/16 1589 | 3 1/2 1.6 |
| 74PK3 | 74 5/8 1895 | 4 1.8 |
| 86PK3 | 86 5/8 2200 | 5 2.3 |

*Height includes leveling bolt and cap.

Every Metroseal 3 shelf and post is backed by a limited 12-year warranty against surface rust formation.



Super Erecta Split Sleeves



Super Adjustable Wedges and Corner Release System



Important: When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232

L02-010B
Printed in U.S.A. Rev. 11/02
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2002 InterMetro Industries Corp.



Item # _____


Job _____

METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

Note: SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


Resilient Rubber

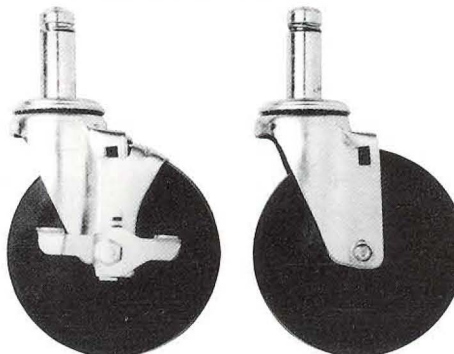

5MB Wheel Brake
Includes Donut Bumper
(not shown)

5M Resilient
Includes Donut Bumper
(not shown)


Stainless Steel, Cart Washable

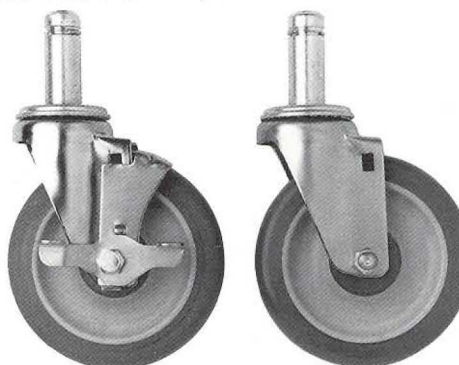

5MDBGSA

5MDGSA

Polymer Horn Casters

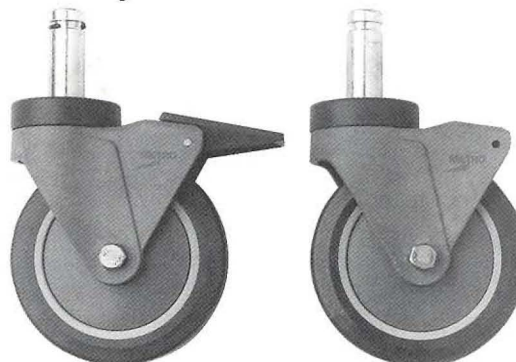

5PCB

5PC



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



Casters (Stem Type)

11.20

METRO® STEM CASTERS



Dimensions

Standard Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|-------------|--------------------|---------------------------------|------|
| 4LD | 4 | 102 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 1 1/2 | .6 |
| 5LD | 5 | 127 | 1/2 | 12 | 125 | 56 | Stem/Swivel | Resilient | 2 | .9 |
| 5M | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Swivel | Resilient | 2 1/2 | 1.1 |
| 5MB | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Brake | Resilient | 2 3/4 | 1.2 |
| 5MR | 5 | 127 | 1 1/4 | 32 | 200 | 90 | Stem/Rigid | Resilient | 3 1/2 | 1.5 |
| 5MDA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRA | 5 | 127 | 1 1/4 | 32 | 250 | 111 | Stem/Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MP | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Brake | Polyurethane | 2 1/4 | 1 |
| 5MPR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Stem/Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5M, 5MD and 5MP casters — 6 7/32" ± 1/16" (155 ± 1.5mm).

NOTE 4: Load Height for 4LD caster — 4 5/8" ± 1/16" (118 ± 1.5mm).

NOTE 5: Load Height for 5LD caster — 5 5/8" ± 1/16" (143 ± 1.5mm).

NOTE 6: Brakes are foot-operated.

Stainless Steel Cart-Washable Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------------|---------------------------------|------|
| 5MDGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Swivel | High Modulus Donut | 2 1/2 | 1.1 |
| 5MDBGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Brake | High Modulus Donut | 2 5/8 | 1.17 |
| 5MDRGSA | 5 | 122 | 1 1/4 | 32 | 150 | 68 | Rigid | High Modulus Donut | 2 3/8 | 1.08 |
| 5MPGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 1/8 | .94 |
| 5MPBGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 1/4 | 1 |
| 5MPRGSA | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 2: Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be known**.

NOTE 3: Load Height for all 5MD and 5MP casters — 6 7/32" ± 1/16" (155 ± 1.5mm).

NOTE 4: All casters are grease sealed with zerk fittings in swivel and axle.

NOTE 5: Brakes are foot-operated.

NOTE 6: "D" in model number designates donut wheel made of high-modulus rubber.

Polymer Casters — Stem Type

| Cat. No. | Wheel Diameter (in.) (mm) | | Face (in.) (mm) | | Load Rating (lbs.) (kg) | | Type | Wheel Tread | Approx. Pkd. Wt. (lbs.) (kg) | |
|----------|------------------------------|-----|--------------------|----|----------------------------|-----|--------|--------------|---------------------------------|----|
| 5PC | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Swivel | Polyurethane | 2 | .9 |
| 5PCB | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Brake | Polyurethane | 2 | .9 |
| 5PCR | 5 | 127 | 1 1/4 | 32 | 300 | 135 | Rigid | Polyurethane | 2 | .9 |

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumper **at no additional charge**.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be provided**.

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-041
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.



STAINLESS STEEL
DROP-IN SINKS
 One Compartment - FOR HAND SINK USE

Sinks Include Gooseneck Faucet & Drain



Item #: _____ Qty #: _____

Model #: _____

Project #: _____

FEATURES:

One piece seamless **Deep Drawn** sink bowl design.

All sink bowls have a large liberal radii with a minimum dimension of 2" and are rectangular in design for increased capacity.

Self-Rim Design. Mounting clips provided accommodates all thicknesses of counter. (Quantity supplied varies based on drop in sink ordered).

Includes 4" O.C. **K-52** faucet.

Includes 3" Drain Basket Drain*.

***DI-1-25** Includes 2" Drain with Strainer Plate.

CONSTRUCTION:

Unit fabricated from one sheet of stainless steel.

All bowls are Sound Deadened.

Units feature Advance Tabco's **Smart Finish™**.

MECHANICAL:

Faucet supply is 1/2" IPS male thread.

Deck mounted faucet is furnished with aerator and 4" O.C.

Faucet Flow Rate: 1.0 GPM/3.8 LPM aerator. 60 PSI.

MATERIAL:

20 gauge type 304 series stainless steel.

Faucets are brass-nickel plated.

Drains are 1-1/2" IPS.



STANDARD MOUNTING CLIPS

For countertops over 7/8" and up to 2" thick.

Replacement # **K-28** (Per Sink)



DI-1-5



DI-1-25



DI-1-5SP



DI-1-10

New 6" Rear & Side Splash



DI-1-10SP



DI-1-35

| Available Faucets & Accessories | Model # | Qty |
|--|-------------|-----|
| Deck Mounted 3 1/2" Gooseneck. 4" O.C. | K-52 | |
| Deck Mounted 8 1/2" Gooseneck. 4" O.C. | K-55 | |
| Deck Mounted Swing w/Spray. 8" O.C.* | K-58 | |
| Deck Mtd. X.H.D. 3 1/2" Gooseneck. 4" O.C. | K-62 | |
| Mounting Clips (Bag of 4). | K-28 | |

*REQUIRES **K-472** FAUCET HOLE REVISION

WARNING: Faucets on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933


DIMENSIONS and SPECIFICATIONS

TOL $\pm .125"$

Supplied with K-52 Faucet


ALL DIMENSIONS ARE TYPICAL

DI-1-5

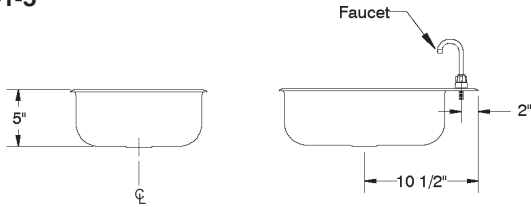


Approx. Wt. 12 lbs.

DI-1-5SP

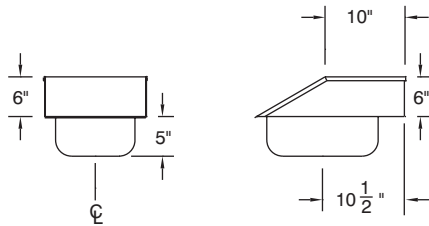


Approx. Wt. 16 lbs.

DI-1-10

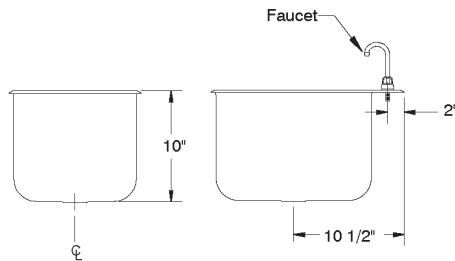


Approx. Wt. 14 lbs.

DI-1-10SP

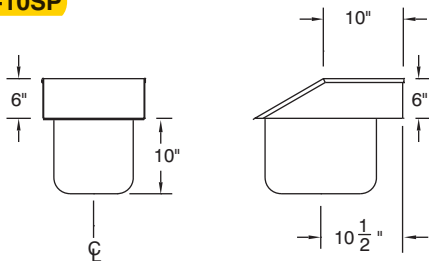


Approx. Wt. 18 lbs.

TOP VIEW FOR DI-1-5 & DI-1-10




Cut-Out Size
12 1/4" x 18 1/4"
1 1/4" radius corners

TOP VIEW FOR DI-1-5SP & DI-1-10SP




DI-1-25



Cut-Out Size
11 1/4" x 13 1/4"
1 1/4" radius corners

Approx. Wt. 8 lbs.


DI-1-35

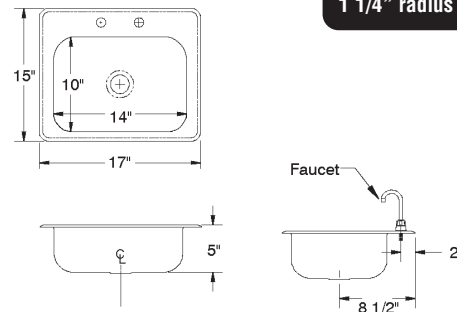

Cut-Out Size
16 1/4" x 14 1/4"
1 1/4" radius corners

Approx. Wt. 10 lbs.


TYPICAL INSTALLATION

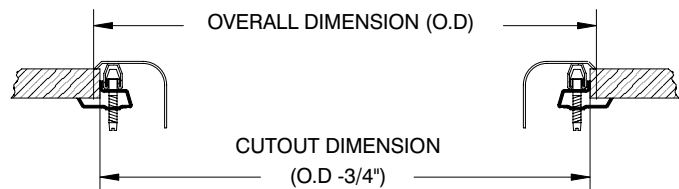

Cut-Out Size = L to R x F to B

**Standard Mounting Clips Fit Countertops
Over 7/8" & Up To 2" Thick.**





T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

EC-3100-HG

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ADA Compliant

This Space for Architect/Engineer Approval

Job Name _____ Date _____

Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____



3 5/8" x 4 3/16" x 2" Deep
[92mm x 106mm x 51mm]
Water Resistant Control Module Box (Blue)
w/ Internal Flow Control Setting Switches,
AC or DC operated w/ (4) AA
Batteries If Hydro-Generator is Not Used.
Hardwire Capable using Terminals on Back

Rigid Gooseneck
w/ 2.2 GPM [8.3 L/min]
Vandal Resistant Aerator

24" [610mm]
Sensor Cable

Removable
Strainer

7 5/16" [185mm]

11" [286mm]
4 1/8" [105mm]

DECK

2 1/4" Max. [57mm]

Ø 1" [25mm]
Deck Hole

Ø 1/8" [3mm]
Pin installed
for Anti-rotation
feature. Remove
pin if desired.
(See Mounting
Hole Detail)

1/2" NPSM x 1/4" NPSM
18" [457mm] Long Flexible
St. Steel Hose (1)

Hydro-Generator
Power Supply.
No AA Batteries
or AC Adapter
Needed to Supply
Power to Faucet.


Also
Includes Optional
100-240 VAC Adapter
w/ 144" [3658mm] Long
Double Power Cord.
(Remove Rubber Plugs
on Module and Cable
to Connect)

Temperature Mixing Valve
w/ Integral Check Valves

Furnished w/ (2)
3/8" Compression x 1/2" NPSM
18" [457mm] Flex. St. Steel Supply Hose

NOTE: Supply Stops by Others

Mounting Hole
Detail



Product Specifications:

Chrome Plated Brass Electronic Faucet: Deck Mount Rigid Gooseneck w/ VR Aerator, AC/DC Control Module w/ Internal Flow Cont. Setting Switches, Temperature Control Mixing Valve w/ Integral Check Valves,, Hydro-Generator, 18" Long Hot & Cold Supply Stop Flexible Connector Hoses

Drawn

KJG

Checked

GEF

Approved

JHB


Scale:

1:4

Date:

03/30/12

Sheet: 1 of 2



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690


Model No.

EC-3100-HG


Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

| ITEM NO. | SALES NUMBER | DESCRIPTION |
|----------|--------------|---|
| 1 | B-0199-06 | VR Aerator w/ Key |
| 2 | 044A | 3/8" to Aerator Adapter |
| 3 | 006575-45 | -015 O-Ring |
| 4 | 017195-45 | Angled Sensor w/ Cable |
| 5 | 016297-45 | Inlet Hose, Faucet, 1/2" NPSM-F x 1/4" NPSM-F |
| 6 | 016647-45 | ChekPoint Module (Blue) |
| 7 | 5EF-0002 | Double Gang, Plug-in AC Transformer |
| 8 | 5EF-0006 | Mechanical Mixing Valve |
| 9 | 5EF-0005 | Supply Hose, 9/16-24 Female x 1/2" NPSM |
| 10 | 015425-45 | Vandal Resistant Key |
| 11 | EC-HYDROGEN | Hydro-generator and Swivel Coupling |
| 12 | 017506-45 | 1/2 NPSM Swivel Coupling |
| 13 | EC-FILTER | Replacement Filter |

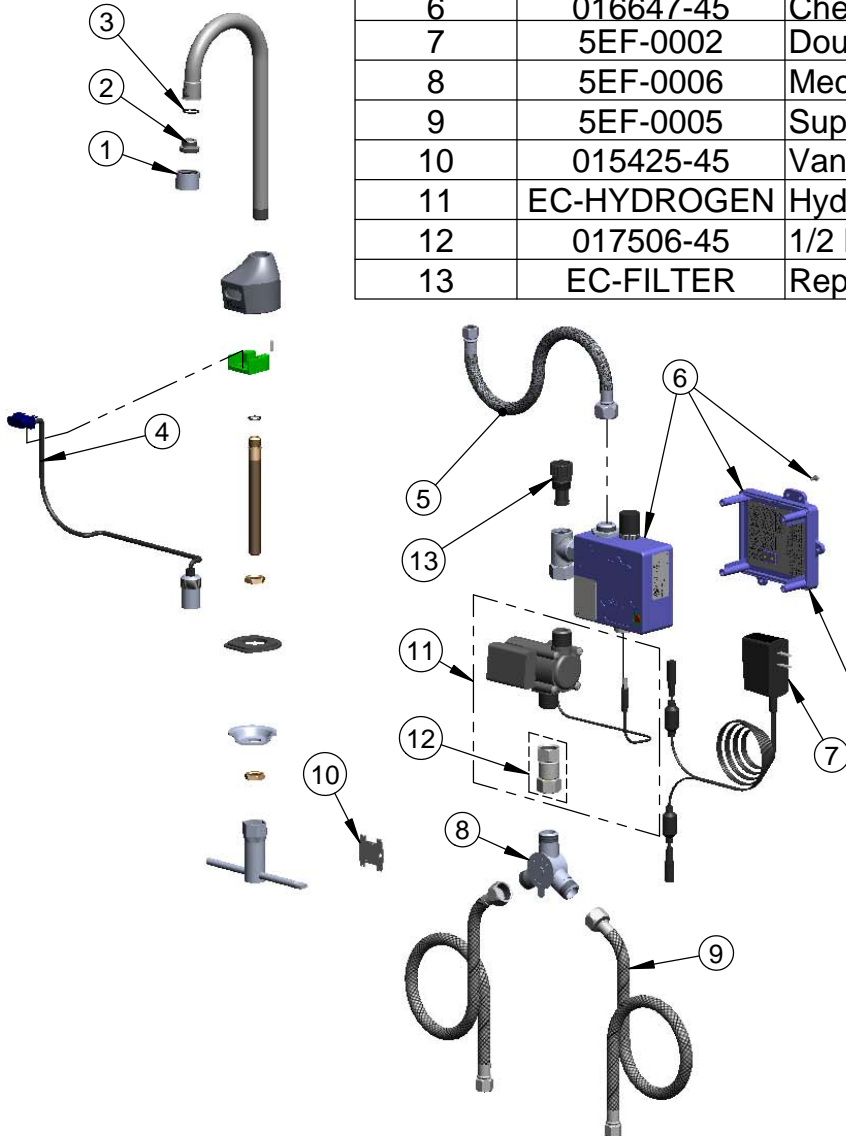

A maximum of (8) ChekPoint Faucets can be hardwire connected and powered by ChekPoint Hardwire AC Transformer. EC-HARDWIRE (Sold Separately)



Label for Flow Control Switch Settings is located on Inside of Back Cover.

Flow Control Switches are located inside Module Housing in Black Box next to Battery Compartment.
*Switches are set to DEFAULT position:
Auto Time Out = 10 seconds
Shut Off Delay = 1 second
Auto Flush = OFF

Remove (4) screws and back cover to access switches.

*Available Water Flow Control Selections:

(6) Auto Time Out Selections - 10 sec, 25 sec, 45 sec, 60 sec, 3 min, 20 min

(4) Shut Off Delay Selections - 1 sec, 2 sec, 4 sec, 10 sec

Auto Flush for 30 Seconds After Every 12 Inactive Hours - ON or OFF

Product Specifications:

Chrome Plated Brass Electronic Faucet: Deck Mount Rigid Gooseneck w/ VR Aerator, AC/DC Control Module w/ Internal Flow Cont. Setting Switches, Temperature Control Mixing Valve w/ Integral Check Valves,, Hydro-Generator, 18" Long Hot & Cold Supply Stop Flexible Connector Hoses

Drawn

KJG

Checked

GEF

Approved

JHB

Scale:

NTS

Date:

03/30/12